

FN91q20g , 1/4Hp , Electrostarc , R12 Refrigerator Compressors , 220V/50-60Hz , 1Phase ,for Refrigerator/Freezer

Category: Technologie,Tester ok
written by www.mbsm.pro | 30 April 2020



FN91q20g , 1/4Hp , Electrostarc , R12 Refrigerator Compressors , 220V/50-60Hz , 1Phase ,for Refrigerator/Freezer

Panasonic ,Compressor ,R134a ,QB series , QB66C13GPX5 , 1/5 HP ,1Phase , 165 w , RSIR, PTC relay ,220V 50Hz

Category: Technologie,Tester ok
 written by www.mbsm.pro | 30 April 2020

QB Series	220V 50Hz	Displacement	QB51C95GPX5	QB57C11GPX5	QB66C13GPX5	QB77C16GPX5	QB91C21RPX5	QB110C25CAX0
		Capacity (W)	128	146	165	202	236	273
		Cooling Type	Static Cooling	Static Cooling	Oil Cooling	Oil Cooling	Oil Cooling	Oil Cooling
		Mototr Type	RSIR, PTC relay	RSIR, PTC relay	RSIR, PTC relay	RSIR, PTC relay	RSIR, PTC relay	RSIR, PTC relay
R134a, LBP								



Private Picture : www.MBSM.PRO

PictureS Mbsm Dot Pro : www.mbsm.pro

Panasonic ,Compressor ,R134a ,QB series , QB66C13GPX5 , 1/5 HP ,1Phase , 165 w , RSIR, PTC relay ,220V 50Hz

230V ,compressor, Danfoss ,SC15MFX , made by Secop, R134a ,refrigeration, CSIR , Moteur HP , R134a ,3 / 8HP ,HMBP ,1PH

Category: Technologie,Tester ok
 written by www.mbsm.pro | 30 April 2020



Private Picture : www.MBSM.PRO

PictureS Mbsm Dot Pro : www.mbsm.pro

230V ,compressor, Danfoss ,SC15MFX , made by Secop, R134a ,refrigeration, CSIR , Moteur HP , R134a ,3 / 8HP ,HMBP ,1PH

Danfoss ,Fridge Compressor ,NL7FT , 1/4 HP ,R134a

Category: Non classé,Technologie,Tester ok
written by www.mbsm.pro | 30 April 2020



2020/4/30 11:51

PictureS Mbsm Dot Pro : www.mbsm.pro

Danfoss ,Fridge Compressor ,NL7FT , 1/4 HP ,R134a

Compressor ELECTROLUX, CUBIGEL
,GP12TB ,Hermetic piston ,ACC ,HMBP ,
moteur HP , 3/8 HP++, 1/2 hp- , 1PH ,
R134A , Pression 1.7 Bar , 220V

Category: compressor,Technologie,Tester ok
written by www.mbsm.pro | 30 April 2020

	Model	Refr.	HP
▶ <input type="checkbox"/>	<u>GL45PB</u>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<u>GL45PB</u>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<u>GL45TB</u>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<u>GL60PB</u>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<u>GL60TB</u>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<u>GL80PB</u>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<u>GL80TB</u>	HMBP::R134a	F
▶ <input type="checkbox"/>	<u>GL90TB</u>	HMBP::R134a	1/4
▶ <input type="checkbox"/>	<u>GP12TB</u>	HMBP::R134a	3/8

Picture5 Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

Compressor ELECTROLUX, CUBIGEL GP12TB ,Hermetic piston ,ACC ,HMBP , moteur HP , 3/8 HP , 1PH , R134A , Pression 1.7 Bar

**QBH57C10GPX, 1/6HP ,RSIR,
Reciprocating Fixed Speed,**

Compressors, R134a, LBP ,PANASONIC SMALL REFRIGERATOR

Category: Solutions,Tester ok

written by www.mbsm.pro | 30 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

QBH57C10GPX, 1/6HP ,RSIR, Reciprocating Fixed Speed, Compressors, R134a, LBP
,PANASONIC SMALL REFRIGERATOR

ZEL , Refrigeration ,Compressor ,Gml200a ,152w , 1/5 Hp ,220/240V/50Hz ,R134a

Category: Technologie,Tester ok




Private Picture Copyright : WWW.MBSM.PRO

ZEL , Refrigeration ,Compressor ,Gml200a ,152w , 1/5 Hp ,220/240V/50Hz ,R134a

HERMETIC ,AW5524EK ,Compressor ,
20,950 BTU ,230/1/60 R-22 ,: 220-240
V/50 Hz. , 1 Phase , 1.7458333333 TON

Category: Technologie,Tester ok
written by www.mbsm.pro | 30 April 2020

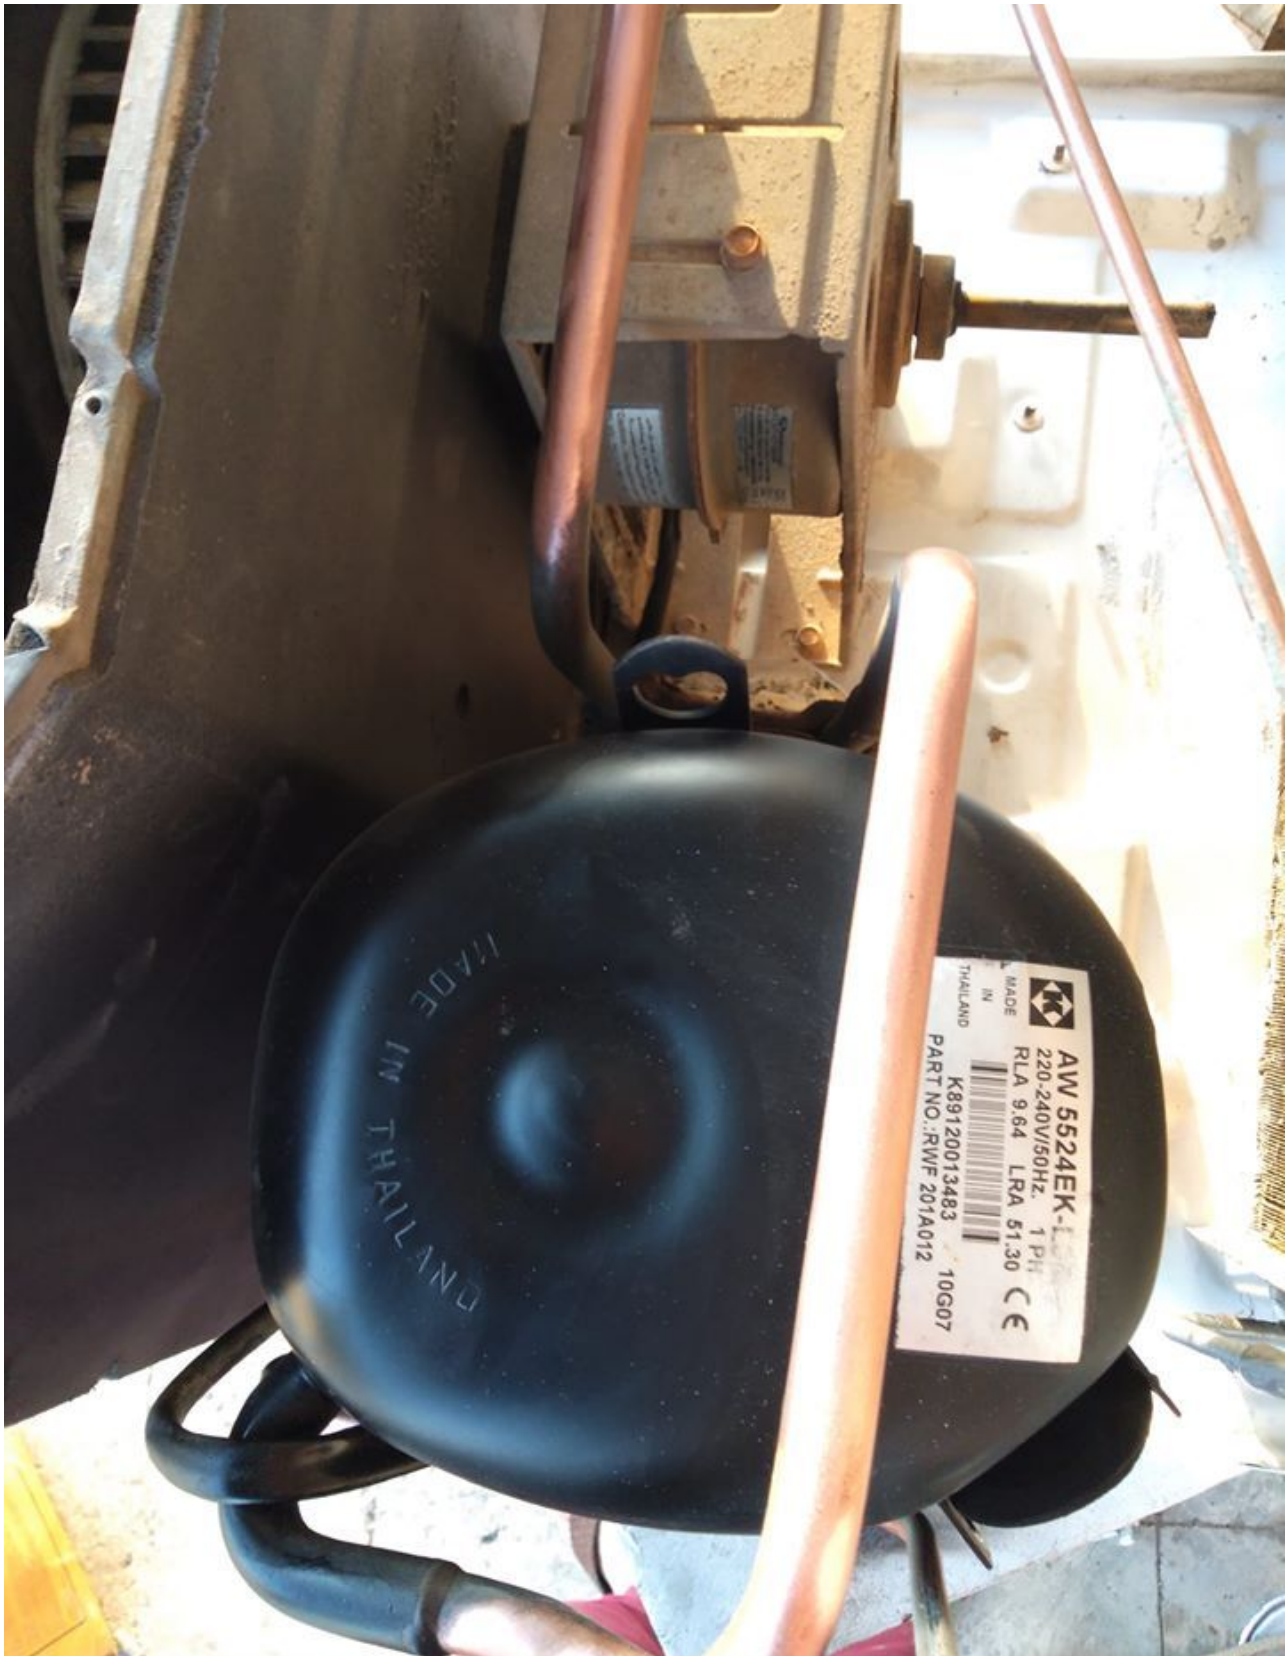

PictureS Mbsm Dot Pro : www.mbsm.pro

Electrical : 220-240 V/50 Hz. 1 Phase
Nominal Performance
Capacity 6,140 / – Watts
20,950 / – BTU/Hr
5,280 / – Kcal/Hr
Power Input 2,089 / – Watts
Locked Rotor Amps 51.30 / – Amps

Max Continuous Current – / – Amps

Rated Load Amps 9.64 / – Amps

COP 2.94 / – Watts / Watts

EER 10.03 / – BTU/W-Hr

Testing Conditions

Condensing Temperature 54.40 °C 129.9 °F

Evaporating Temperature 7.20 / – °C 45.0 / – °F

Liquid Temperature 46.10 °C 115.0 °F

Return Gas Temperature 35.00 °C 95.0 °F

Ambient Temperature 35.00 °C 95.0 °F

Application

Evaporating Temp. Range HBP, A/C @ 0.00 ° C to 13.00 ° C
(32.0° F to 55.4° F)

Heat Pump -23.30 ° C to 13.00 ° C
(-9.9° F to 55.4° F)

Refrigerant R22

Refrigerant Flow Control Capillary Tube

Compressor Cooling Fan

Compressor and Motor data

Compressor Type Reciprocating

Displacement 43.10 cc.

Oil Type Mineral Oil

Oil Charge 964 cc.

Motor Type P.S.C ; 2 Pole 2,850 / – r/m

Voltage Range 198-264/- Volts 50/- Hz.

Winding Resistance at 25 ° C

Start 2.52 Ohms

Run 1.24 Ohms

Weight with Oil 27.72 Kg.

Weight with Oil and Accessories 28.05 Kg.

Electrical Components

Motor Protector

Type Internal Overload

Model Number 4042KGE661-2

Open / Close 125-135 / 50-70 ° C

1st Cycle trip at 25 ° C 50.00 Amps(main) 30.00 Amps(start)

Motor Starter

Type Potential Relay

Model Number 4043KGE681-4(RVA3G6D)

Pick Up (max.) 180.00-195.00 Volts

Drop Out (min.) 40.00-90.00 Volts

Terminal Cover KGM 901-3

Start Capacitor 88-106 µF 330 VAC.

Disch Resistor for Start Cap –

Run Capacitor 45 µF 370/440 VAC.

Mounting Kit

Rubber Grommet 4007KGM905-2

Sleeve Grommet 4023KGM903-2

Washer –

Since we are constantly improving our product , the

specification are subject to change without notice.
REV. DATE C / N No.
ECN 01-04-14 ECN 0515/13





Dot Pro : www.mbsm.pro


DOCUMENTATION PDF

Mbsm_dot_pro_private_pictureAW5524EKTélécharger

Compresseurs Embraco, , EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 180 mL

Category: Technologie, Tester ok

written by www.mbsm.pro | 30 April 2020

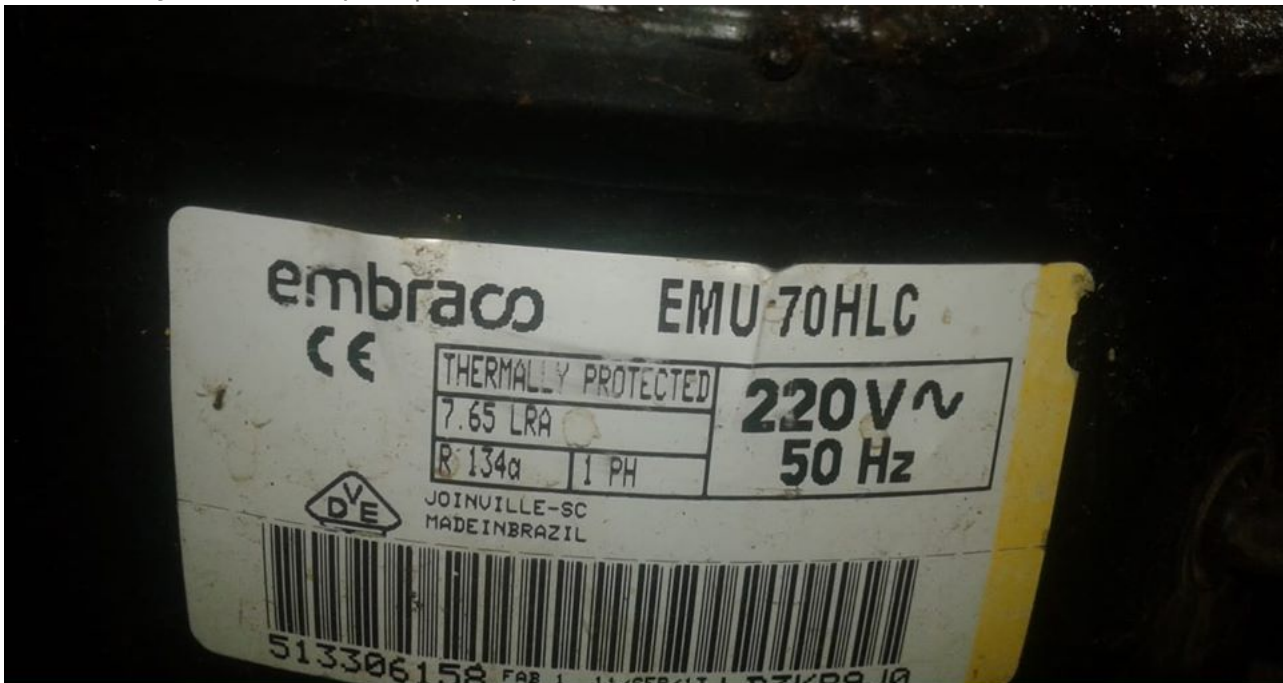

PictureS Mbsm Dot Pro : www.mbsm.pro

Compresseurs Embraco, , EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 0.17
kW (0.2214 BHP) , 180 mL

Austria ,RECIPROCATING ,COMPRESSOR
,SECOP ,HXD30AA ,0.04 1/25 HP ,R600a
, 220v 50Hz

Category: Technologie,Tester ok
written by www.mbsm.pro | 30 April 2020



Picture5 Mbsm Dot Pro : www.mbsm.pro

Austria ,RECIPROCATING ,COMPRESSOR ,SECCOP ,0.04 HP ,HXD30AA , 1/25 HP ,R600a ,
220v 50Hz