

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions,Tester ok

written by www.mbsm.pro | 12 October 2018



Picture5 Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp,
displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP

- ASPERA

SKU: 3070180

Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO




embraco **NT**



R134a

HBP

EM/NE/NT/NJ

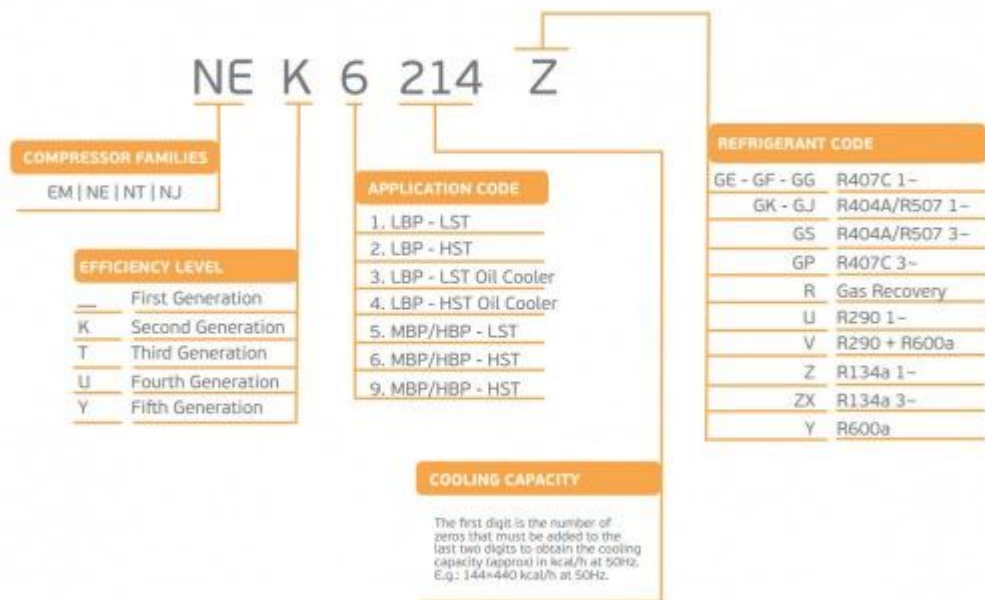

50Hz 50-60Hz	R134a							
	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration
Compressor, CAE9460Z ,R404A
refrigerant ,3/8 hp, mhbp, 1/2HP
,1PH(phase) , 220V to 240V

Category: Solutions,Tester ok
written by Jamila | 12 October 2018

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_{LA} 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A refrigerant ,1/2HP
,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_{LA} 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

LOW BACK PRESSURE COMPRESSORS

Type	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature								
					Oil charge (cm ³)	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C	-10°C	
						t	t	t	t	t	t	t	
PISTON	AEZ2415Z	7/16	R404A	8.1	350			160	231	355	429	703	220-240V/1/50Hz
	CAE2417Z	7/16	R404A	11.3	350	37.8	62	161	280	460	557	891	220-240V/1/50Hz
	CAE2420Z	1/2	R404A	12.6	350	194	179	232	357	547	654	1047	220-240V/1/50Hz
	CAE2424Z	5/8	R404A	15.1	350	228	180	291	442	664	783	1199	220-240V/1/50Hz
	CAJ2428	3/4	R404A	15.2	887			306	434	628	773	1246	220-240V/1/50Hz 400V/3/50Hz
	CAJ2432Z	3/4	R404A	18.3	887	331	285	318	510	792	950	1560	220-240V/1/50Hz 400V/3/50Hz
	CAJ2440Z	1	R404A	21	887	532	394	452	647	975	1166	1876	220-240V/1/50Hz
	CAJ2446Z	1	R404A	26.15	887	702	575	549	797	1194	1423	2290	220-240V/1/50Hz 400V/3/50Hz
	CAJ2464Z	1-1/2	R404A	34.45	887	805	626	723	1076	1605	1902	3012	220-240V/1/50Hz 400V/1/3/50Hz
	FH2480Z	2	R404A	53.2	1625	292	420	738	1319	2183	2662	4419	220-240V/1/50Hz 400V/3/50Hz
	TFH2480Z												
	FH2511Z	3	R404A	74.25	1625	1561	1203	1380	2016	3135	3796	6222	220-240V/1/50Hz 400V/3/50Hz
	TFH2511Z												
	TAG2516Z	4	R404A	112.5	1960	1696	1407	1743	2704	4356	5335	9038	400V/3/50Hz
TAGP2516Z													
TAG2522Z	6	R404A	134.8	1960	2541	2012	2378	3542	5522	6688	11062	400V/3/50Hz	
TAGP2522Z													

Picture5 Mbsm Dot Pro : www.mbsm.pro

THE NEW TWO GENERATION BRAZIL COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)								VOLTAGE	
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature									
					Oil charge (cm ³)	-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C		+15°C
						t	t	t	t	t	t	t		
PISTON	AE4425Z-FZ1A	1/5	R404A	4.24	222	228	290	362	446	545	659	792	220-240V/1/50Hz	
	AE4430Z-FZ1A	1/4	R404A	5.16	216	293	375	466	568	685	821	977	220-240V/1/50Hz	
	AE4440Z-FZ1A	1/3	R404A	6.69	278	377	482	599	730	881	1055	1257	220-240V/1/50Hz	
	AE4450Z-FZ1A	7/16	R404A	8.85	369	500	640	795	970	1170	1401	1688	220-240V/1/50Hz	
	AE4460Z-FZ1C	1/2	R404A	10.33		636	784	959	1160	1380	1630	1920	220-240V/1/50Hz	

Tecumseh Compressor

LOW BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)						VOLTAGE	
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature							
					Oil charge (cm ³)	-35°C	-30°C	-25°C	-20°C	-15°C		-10°C
						t	t	t	t	t		t
ROTARY	RGA/HGA2426Z	2/3	R404A	9.50	290	375	474	590	726	888	1080	220-240V/1/50Hz
	RGA/HGA2432Z	4/5	R404A	11.50	290	451	567	707	872	1065	1290	220-240V/1/50Hz
	RGA/HGA2436Z	1	R404A	12.70	290	508	643	804	994	1219	1483	220-240V/1/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

Tecumseh Compressor

MEDIUM/HIGH BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE	
		Displacement (cm ³)	Oil charge (cm ³)	Evaporating Temperature									
				Refrigerant									
				-15°C	-10°C	-5°C	0°C	+5°C	+10°C	+15°C			
ROTARY	RGA/HGA4467Z	1/2	R404A	9.50	290	679	847	1047	1283	1557	1872	2231	220-240V/1/50Hz
	BGA/HGA4480Z	2/3	R404A	11.50	290	825	1017	1252	1530	1851	2212	2613	220-240V/1/50Hz
	RGA/HGA4492Z	3/4	R404A	12.50	290	905	1133	1398	1706	2060	2468	2932	220-240V/1/50Hz
	RGA/HGA4512Z	1	R404A	16.10	290	1163	1438	1770	2160	2609	3118	3689	220-240V/1/50Hz
	RGA/HGA4445Y	1/3	R134a	9.50	290	392	493	618	770	954	1173	1430	220-240V/1/50Hz
	RGA/HGA4450Y	2/5	R134a	11.50	290	501	625	778	963	1184	1445	1749	220-240V/1/50Hz
	RGA/HGA4460Y	1/2	R134a	12.70	290	537	677	844	1045	1287	1576	1920	220-240V/1/50Hz

PictureS Mbsm Dot Pro : www.mbsm.pro



MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W,
GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Zel gml200a gml180a gml160g gml140a

gml110a r134a Compressors

- gml200a 152W
- GML180A 144W
- gml160g 129W
- gml140a 108W
- GML110A 90W

Place of purchase:
Mainland China

Brand:
West of Monza


Color classification:
gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:
R134a

Voltage:
220-240V 50HZ

Working conditions:
Low back pressure



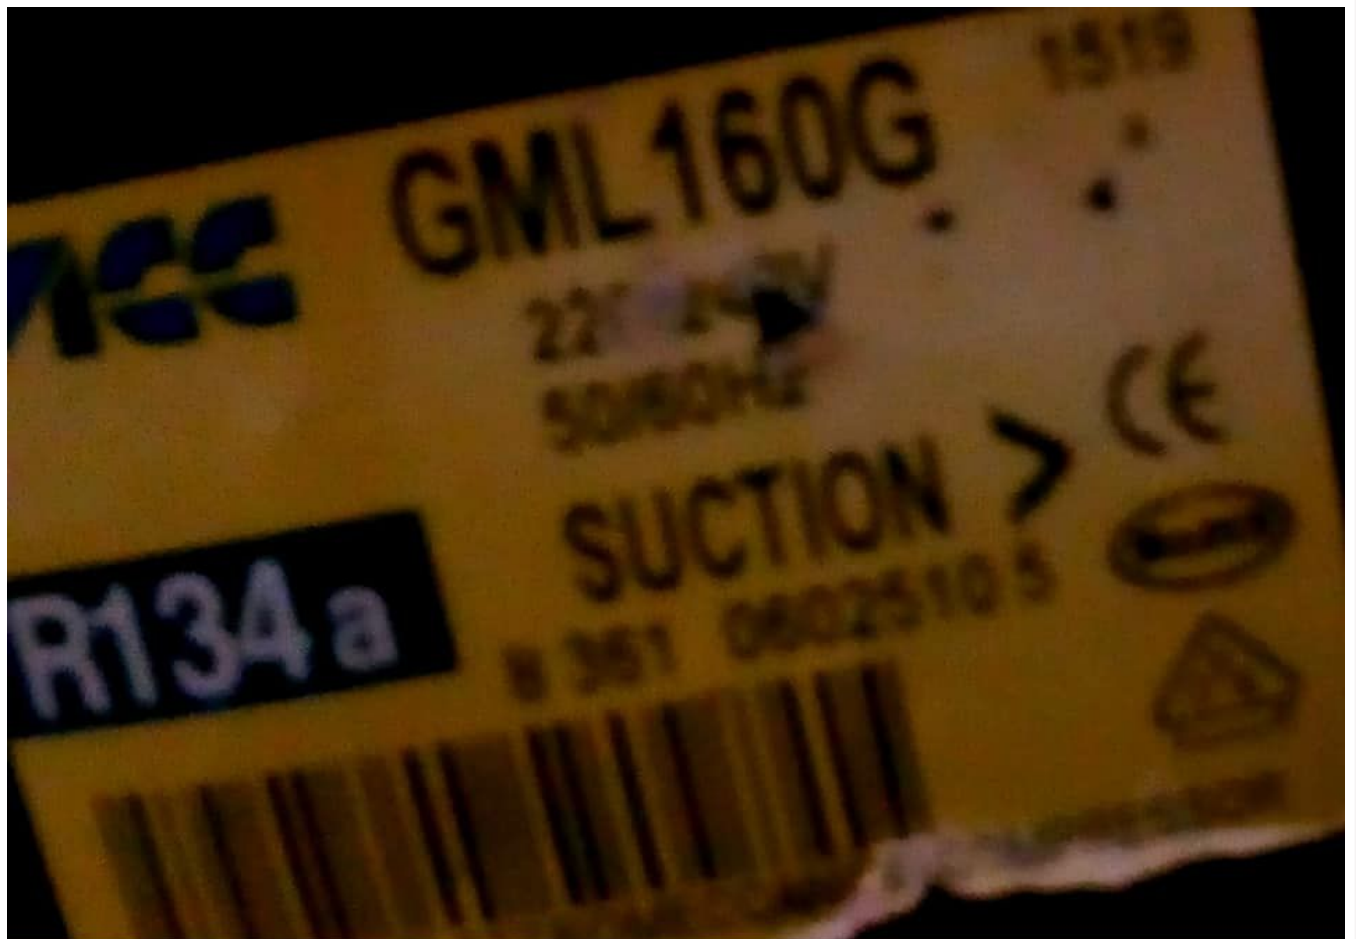

PictureS Mbsm Dot Pro : www.mbsm.pro


Mbsm.pro, GTH93AA , compressor
coolant R134a , 220-240V 50Hz MBP
9,8kg, 1/4HP++, 1/3 hp- cylinder
capacity 9,3cm³, 260 W,

Category: Solutions, Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg 1/4HP
cylinder capacity 9,3cm³

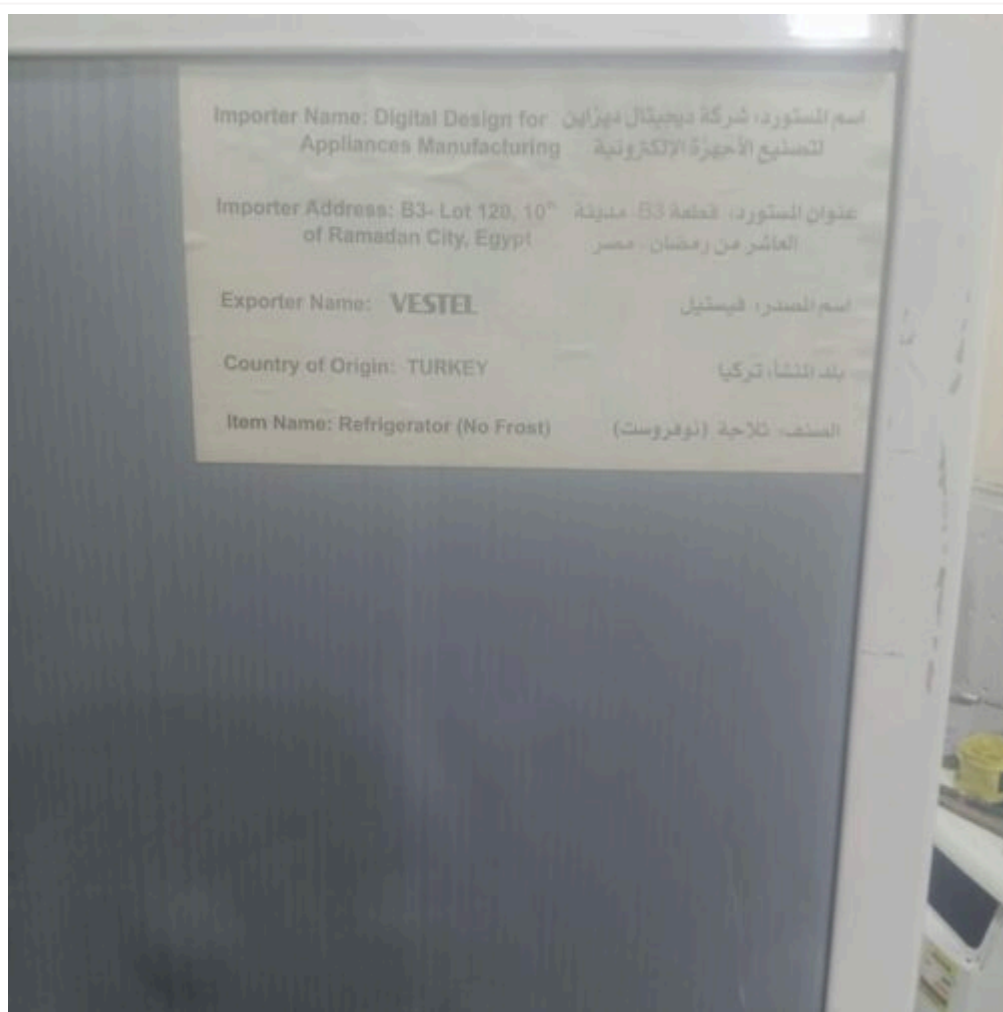



PictureS Mbsm Dot Pro : www.mbsm.pro

refrigerant R134a
 type GTH93AA
 voltage 220-240 V

frequency 50 Hz
application MBP
weight 9,8 kg
power 1/4 HP
cylinder capacity 9,3 cm³
motor system RSIR/RSCR
height 184 mm
power at -20°C – W
power at -15°C – W
power at -10°C – W
power at -5°C – W
power at 0°C – W
power at +5°C – W

Mbsm_dot_pro_private_PDF_GTH93AA-compresseur-acc-cubigell-gl99aaTélécharger
Mbsm_dot_pro_private_PDF_catalog_zelTélécharger

Mbsm.pro, ATA72XL, Lbp compressor, HuaGuang coolant, R134a, 220-240V 50/60Hz, 1/4HP, 1PH, 205 w, Lbp

Category: Solutions, Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a , 220-240V 50/60Hz ,
1/4HP , 1PH
Détails rapides

Lieu d'origine:
Guangdong, Chine

Marque:
Wanbao

Type:
Compresseur de réfrigération

Application:
Pièces de réfrigération

Certification:
ce, CCC / CB / VDE

Réfrigérant:
R134A

Marque:
Wanbao

Tension:
220-240V 50HZ

Déplacement:
72 cm³

Refroidissement:
ST / OC

Type de moteur:
RSIR

Capacité de refroidissement:
185 W

Capacité:
631 BTU

Max. Hauteur "A":
188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des

équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l'étranger-Italie ACC, puis a fondé l'italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l'internationalisation du marché à l'internationalisation de la fabrication et jette des bases solides à l'internationalisation de la marque pour la prochaine étape.

La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d'unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d'appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d'appareils électroménagers haut de gamme.

Modèle	Réfrigérant	Tension	Capacité de refroidissement (w)	Application	COP (w / w)
AS43	R134a	220V / 50Hz	84	LBP	0,94
AS51	R134a	220V / 50Hz	107	LBP	1,01
ASD43K	R134a	220V / 50Hz	117	LBP	1.13
ASD53K	R134a	220V / 50Hz	144	LBP	1.2
ASD65	R134a	220V / 50Hz	173	LBP	1,23
ATA72X	R134a	220V / 50Hz	205	LBP	1,35
ATA80X	R134a	220V / 50Hz	230 1/4 hp++	LBP	1,35
ANA90	R134a	220V / 50Hz	255	LBP	1,35
AQAW110R	R134a	220V / 50Hz	260	LBP	1,15
ANA120	R134a	220V / 50Hz	345	LBP	1,3

Autre compresseur de congélateur wanbao que nous avons:

Pas	HP	Modèle	Réfrigérant	Qté/Une Palette
1	1/10HP	ASD35K	R134a	100
2	1/6HP	ASD53K	R134a	80
3	1/5HP	AQAW66X	R134a	80
4	1/4HP	AQAW77X	R134a	80
5	1/4HP Gros	AQAW91	R134a	80
6	1/3HP	AQAW110	R134a	80
7	3/8HP	AL120	R134a	80
8	1/2HP	AL150	R134a	80
9	1/2HP, grand	AL180	R134a	80

型号 Model	气缸容积 Displacement	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity				COP			认证 Certification	最大高度 "A" Max. Height "A"
				ASHRAE		CECOMAF	ASHRAE		CECOMAF			
				-23.3°C		-25°C	-23.3°C		-25°C			
				W	Btu	W	W/W	EER	W/W			
LBP												
220-240V 50HZ R134a												
T系列 T Series												
ATA72X	7.2	ST/OC	RSIR	205	699	155.3	1.35	4.6	1.05	CCC/CB/VDE	185/188	
ATA80X	8.1	ST/OC	RSIR	230	785	174.2	1.35	4.6	1.05	CCC/CB	185/188	
ATK72X	7.2	ST/OC	RSCR	205	699	154.0	1.40	4.8	1.09	CCC/CB/VDE/CE	185/188	
ATK80X	8.1	ST/OC	RSCR	230	785	174.0	1.40	4.8	1.09	CCC/CB	185/188	
▲ATD50V	5.0	ST	RSIR	140	478	105.2	1.25	4.3	0.98	CCC/CB	182	
ATD66X	6.6	ST/OC	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182	
△ATA50K	5.0	ST	RSIR	144	491	108.9	1.35	4.6	1.05	CCC/CB	182/185	
△ATA66K	6.6	ST	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182	
ATA66K(OC)	6.6	OC	RSIR	190	648	143.7	1.35	4.6	1.05	CCC/CB	188	
ATA72K(OC)	7.2	OC	RSIR	205	699	154.0	1.35	4.6	1.05	CCC/CB	188	
ATK55	5.5	ST	RSCR	160	546	121.0	1.35	4.6	1.05	CCC/CB	185	
ATK60	6.0	ST	RSCR	180	614	135.0	1.51	5.2	1.18	CCC/CB/CE	185	
ATK66	6.6	ST	RSCR	192	655	144.0	1.55	5.3	1.21	CCC/CB/CE	185	

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ATA72X-220-240V_50HZ_R134A-1Télécharger



Picture5 Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO



●● REDMI NOTE 8T
∞ AI QUAD CAMERA



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 8T
AI QUAD CAMERA



Mbsm.pro , GL80AF , ZEM, EGL80AF,
Compressors , Hermetic compressors,
220-230V 50/60Hz , 1/5HP , 1PH , HBP,
R134A

Category: Solutions, Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , GL80AF ,ZEM Compressors , Hermetic compressors, 220-230V 50/60Hz ,
1/5HP ,1PH , HBP, R134A

GD40AF 1/9 , GL45AF 1/8 , GL60AF. GL60AF, GL70AF , GL70ANa 1/5.,GL70AND.
, GL80AF 1/5.

LBP															
R134a 60 Hz			CECOMAF (W)						ASHRAE		R134a 60 Hz				
			-35	-30	-25		-10	-23.3							
					W	COP		kcal/h	COP						
200-220/220-230V 50/60Hz ~I															
GD30AG	1/12	S	3.08	25	39	57	0.67	130	68	0.88	C	200	5.8	RSIR	P
GD40AF	1/10	S	4.03	35	54	77	0.70	171	91	0.91	C	200	6.8	RSIR	P
GL99BL	1/4	OC	9.93	102	148	204	0.93	434	239	1.21	C	470	11.3	RSCR	P
GL45AF	1/8	S	4.55	41	64	94	0.76	214	111	0.99	C	270	9.0	RSIR	P
GL60AF	1/6	S	5.99	66	94	131	0.81	286	154	1.05	C	270	9.1	RSIR	P
GL70AF	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANa	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANb	1/5	OC	6.65	80	110	150	0.90	323	175	1.17	C	445	10.4	RSIR	P
GL80AF	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANa	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANb	1/5	OC	8.10	87	123	172	0.92	384	202	1.19	C	445	10.7	RSIR	P
GL90AF	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANa	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANb	1/4	OC	9.08	96	134	185	0.93	420	218	1.20	C	445	10.9	RSIR	P
115V 60Hz ~I															
GD24AD	1/20	S	2.42	14	25	40	0.52	99	48	0.70	C	200	5.1	RSIR	P
GD36AD	1/12	S	3.62	30	47	68	0.65	149	80	0.85	C	240	6.1	RSIR	P
GL45ADa	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C	265	8.1	RSIR	P
GL45ADb	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C-V	265	8.1	CSIR	R
GL60ADa	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	265	9.1	RSIR	P
GL60ADb	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	210	9.1	CSIR	R
GL60BK	1/6	OC	5.99	66	95	132	0.84	290	155	1.10	C	400	10.0	RSCR	P
GL70ADa	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	RSIR	P
GL70ADb	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	CSIR	R
GL80ADa	1/5	S	8.10	84	121	171	0.87	383	201	1.13	C	345	9.8	RSIR	P
GL80ADb	1/5	S	8.10	84	122	171	0.87	384	201	1.13	C-V	345	9.8	CSIR	R
GL80BK	1/5	OC	8.10	79	119	169	0.85	381	200	1.11	C	470	11.1	RSCR	P
GL90ADa	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	RSIR	P
GL90ADb	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	CSIR	R



ZMC

EGL80AF 0609

R 134 a



200-220V~50Hz

220-230V~60Hz

MADE IN EGYPT



3 445

0265983



					kcal/h	W	W/W	W/W	W/W	W/W
▶ <input type="checkbox"/> GL45AA	LBP-R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> GL45AN	LBP-R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> GL60AA	LBP-R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> GL60AF	LBP-R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> GL60AH	LBP-R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> GL60AN	LBP-R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> GL70AA	LBP-R134a	1/5	43	A	149	128	1.18	0.9		
▶ <input type="checkbox"/> GL70AN	LBP-R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> GL70AT	LBP-R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> GL75AA	LBP-R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> GL80AA	LBP-R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> GL80AF	LBP-R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> GL80AH	LBP-R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> GL80AN	LBP-R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> GL90AA	LBP-R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> GL90AH	LBP-R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> GL90AN	LBP-R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> GL90AT	LBP-R134a	1/4	43	E	190	163	1.18	0.87		



PictureS Mbsm Dot Pro : www.mbsm.pro



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Données techniques

- Modèle: **GL80AA**
- Gaz réfrigérant: **R-134a**
- Pression / température: **LBP**
- Puissance: **1/5 HP**
- Type de courant: **monophasé**
- Fréquence: **50 Hz**
- Type de compresseur: **hermétique**
- Déplacement: **8,10 cm³**
- Consommation d'énergie. Énergie -35 ° C: **117 W**
- Consommation d'énergie. Énergie -25°C: **158 W**
- Consommation d'énergie. Énergie -10 ° C: **237 W**
- T ° Condensation: **40 ° C**
- Capuchon de refroidissement. -35 ° C: **95 Kcal / h**
- Capuchon de refroidissement. -30 ° C: **132 Kcal / h**
- Capuchon de refroidissement. Énergie -25 ° C: **178 Kcal / h**
- Capuchon de refroidissement. -20 ° C: **234 Kcal / h**

- Capuchon de refroidissement. -15 ° C: 300 Kcal / h
- Capuchon de refroidissement. Énergie -10 ° C: 375 Kcal / h
- Type de test: Ashare 32

Mbsm_dot_pro_private_PDF_GLy60aaTélécharger

Mbsm_dot_pro_private_PDF_GLy60aa-1Télécharger

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

Category: Solutions,Tester ok

written by www.mbsm.pro | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

BRAND

◦ – ZMC

TECHNICAL SPECIFICATIONS :

- MODEL: EGL 90 AA
- POWER: 1/4 Hp
- VOLTAGE: 220 – 240 V
- WATT: 227.00 W
- REFRIGERANT GAS: R 134
- K.CAL: 195.00 Cal.

Features : The compressors form the basis of the refrigerant system and function to compress the gas from the evaporation to the condensation pressure.

USAGE PLACES :

It is used in Refrigerator devices belonging to all brands and models.

INSTRUCTIONS FOR USE:

Zmc EGL90AA;It is recommended to be used by a specialist authorized or authorized service.



[Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger](#)

[Mbsm_dot_pro_private_PDF_cubigel-katalogTélécharger](#)

**Mbsm.pro, DAEW00 Compressor ,
HSL27YE-5, 1/4HP , 1PH, R134a
,220-240V 50Hz,Puissance frigorifique
244 W, 833 Btu / h**

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, DAEW00 Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V
50Hz,Puissance frigorifique 244 W, 833 Btu / h

Mbsm.pro , L76AV ,Compresseur, 1/5 HP
,149W, R12 ,E80101 ,Zem ,HMBP
,Hermetic piston compressors ,
220V/50 , 1PH(phase)

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , L76AV ,Compresseur, 1/5 HP ,149W, R12 ,E80101 ,Zem ,HMBP ,Hermetic
piston compressors , 220V/50 , 1PH(phase)

MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Picture5 Mbsm Dot Pro : www.mbsm.pro

MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd,
69 YL ,1/4 Hp ,168Kcal , 220V

Test conditions	According to ASHRAE
Evaporating temperature	-23.3[°C]
Condensing temperature	54.4[°C]
Subcooling temperature	32.2[°C]
Suction temperature	32.2[°C]
Ambient temperature	32.2[°C]
Working condition limit:R134a	
Max ambient temperature	43[°C]
Evaporation temperature range	-35~-15[°C]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[°C]
Max discharge temperature	125[°C]
Max pressure housing endured	2.7[Mpa](gauge pressure)

Low voltage start

0.4/0.4Mpa(gauge pressure)187V/98V

Product model:HYE69YL

Cooling capacity:195W

COP[W/W]:1.15

Voltage[V]:220-240~

Frequency(Hz):50



Products

- R134a Compressor (LBP)
 - HYE Serie
 - HY Serie
 - HYB Serie
 - HYS Serie
 - R600a Compressor (LBP)
 - HYE Serie
 - HY Serie
 - HYB Serie
 - HYS Serie
 - R134a Compressor (MBP,HBP)
 - HY Serie
 - HYE Serie
- [Newest Catalog Download](#)



5.5



Product model:HYE69YL
 Cooling capacity:195W
 COP (W/W) :1.15
 Voltage (V) :220-240-
 Frequency(Hz):50

Test conditions	According to ASHRAE
Evaporating temperature	-23.3°C
Condensing temperature	54.4°C
Subcooling temperature	32.2°C
Suction temperature	32.2°C
Ambient temperature	32.2°C
Working condition limit:R134a	
Max ambient temperature	43[°C]
Evaporation temperature range	-35~-15[°C]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[°C]
Max discharge temperature	125[°C]
Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.40.4Mpa(gauge pressure)187V/98V



AE 1330 Y
1 / 12 HP



AE 1340 Y
1 / 6 HP



AE 1350 Y
1 / 6 HP



AE 1360 Y
1 / 5 HP



AE 1370 Y
1 / 4 HP



AE 1390 Y
1 / 4 HP



HY 81 Y

1 / 4 HP



HYE 55 YL 63

1 / 6 HP



HYE 60 YL 63

1 / 5 HP



HYE 69 YL

1 / 4 HP



HYE 125 MSU

1 / 4 HP





Huayi HYE 69 YL 1/4 Hp 168Kcal R134a 220V

Huayi - Huayi

Huayi HYE 55 YL 63 1/6 Hp 129Kcal R134a 220V

Huayi - Huayi

Huayi HYE 60 YL 63 1/5 Hp 146Kcal R134a 220V

Huayi - Huayi

Huavi HY 81 Y 1/4+ Hp 202Kcal R134a 220V

PictureS Mbsm Dot Pro : www.mbsm.pro



HYE 125 MSU

HYE 69 YL

HYE 60 YL 63

HYE 55 YL 63

HY 81 Y

AE 1390 Y

AE 1370 Y

AE 1360 Y

AE 1350 Y

AE 1340 Y

AE 1330 Y

PictureS Mbsm Dot Pro : www.mbsm.pro



Features

1/4 HP

Energy Efficient

Wide Voltage Range

Low Noise & Low Vibration

High Overload Capacity

Designed for High Ambient conditions

