

Compressors ZMC, EGL70AT, 1/5Hp, 1Ph,
GL70AT, R-134a, standard Efficiency,
220-240V 50Hz, Cubigel Compressor,
Cubigel, RSIR, LBP – LST – S, no
Starting capacitor

Category: compressor

written by www.mbsm.pro | 19 December 2020



Private Picture Copyright: WWW.MBSM.PRO

GD40AA	4.06	1/10	LBP	S	220-240V 50Hz ~1	RSIR	P	C	34	50	70	0.77	155	82	1.00	6.1	Dd
GD40AF	4.06	1/10	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	31	47	66	0.67	147	78	0.88	6.8	Dd
GLY45AAa	4.56	1/8	LBP	S	220-240V 50Hz ~1	RSIR	P	C	47	65	89	1.01	192	104	1.30	8.7	Lb
GLY45AAb	4.56	1/8	LBP	S	220-240V 50Hz ~1	RSCR	P	C	48	66	90	1.05	193	105	1.36	8.7	Lb
GL45AAa	4.56	1/8	LBP	S	220-240V 50Hz ~1	RSIR	P	C	37	57	81	0.81	184	96	1.06	7.9	Lb
GL45AAb	4.56	1/8	LBP	S	220-240V 50Hz ~1	CSIR	R	C-V	37	57	81	0.81	184	96	1.06	7.9	Lb
GL45AF	4.56	1/8	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	36	56	80	0.74	184	95	0.97	8.4	Lb
GL45AAa	4.56	1/8	LBP	S	200-240/220-230V 50/60Hz ~1	RSIR	P	C	36	56	80	0.78	184	95	1.03	8.4	Lb
GLY55AAa	5.46	1/7	LBP	S	220-240V 50Hz ~1	RSIR	P	C	53	78	108	1.03	238	127	1.33	8.7	Lb
GLY55AAb	5.46	1/7	LBP	S	220-240V 50Hz ~1	RSCR	P	C	54	78	109	1.09	239	128	1.40	8.7	Lb
GLY60AAa	5.98	1/6	LBP	S	220-240V 50Hz ~1	RSIR	P	C	58	85	119	1.03	255	139	1.34	8.7	Lb
GLY60AAb	5.98	1/6	LBP	S	220-240V 50Hz ~1	RSCR	P	C	58	86	120	1.10	256	140	1.42	8.7	Lb
GL60AAa	5.98	1/6	LBP	S	220-240V 50Hz ~1	RSIR	P	C	50	75	107	0.85	239	126	1.10	8.4	Lb
GL60AAb	5.98	1/6	LBP	S	220-240V 50Hz ~1	CSIR	R	C-V	50	75	107	0.85	239	126	1.10	8.4	Lb
GL60AF	5.98	1/6	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	57	81	113	0.82	245	132	1.07	9.1	Lb
GL60AAa	5.98	1/6	LBP	S	200-240/220-230V 50/60Hz ~1	RSIR	P	C	57	82	114	0.83	244	133	1.09	9.1	Lc
GL60AAb	5.98	1/6	LBP	F	200-240/220-230V 50/60Hz ~1	CSIR	R	C-V	57	82	114	0.83	244	133	1.09	9.1	Lc
GL60AAc	5.98	1/6	LBP	S	200-240/220-230V 50/60Hz ~1	CSIR	R	C-V	57	82	114	0.83	244	133	1.09	9.1	Lc
GL60AAd	5.98	1/6	LBP	OC	200-240/220-230V 50/60Hz ~1	RSIR	P	C	57	82	114	0.83	244	133	1.09	9.2	Lc
GLY70AAa	6.65	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	70	96	132	1.05	288	154	1.36	9.7	Lb
GLY70AAb	6.65	1/5	LBP	S	220-240V 50Hz ~1	RSCR	P	C	71	97	133	1.12	289	155	1.44	9.7	Lb
GL70AA	6.65	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	58	86	121	0.87	268	142	1.12	8.8	Lc
GL70AAa	6.65	1/5	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	70	95	129	0.83	278	151	1.08	9.4	Lc
GL70AAb	6.65	1/5	LBP	F	200-220/220-230V 50/60Hz ~1	CSIR	R	C-V	70	95	129	0.83	278	151	1.08	9.4	Lc
GL70AAc	6.65	1/5	LBP	S	200-220/220-230V 50/60Hz ~1	CSIR	R	C-V	70	95	129	0.83	278	151	1.08	9.4	Lc
GL70AAd	6.65	1/5	LBP	OC	200-220/220-230V 50/60Hz ~1	RSIR	P	C	70	96	129	0.83	278	151	1.08	9.5	Ld
GLY75AAa	7.38	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	74	107	147	1.06	311	172	1.36	9.9	Lc
GLY75AAb	7.38	1/5	LBP	S	220-240V 50Hz ~1	RSCR	P	C	76	108	147	1.12	312	172	1.44	9.9	Lc
GL75AA	7.38	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	68	95	132	0.91	296	155	1.18	9.0	Lc
GLY80AAa	8.10	1/5	LBP	S	220-240V 50Hz ~1	RSCR	P	C	80	120	164	1.07	340	191	1.37	10.6	Lc

Private Picture Copyright: WWW.MBSM.PRO

Model: GL70AA

General data

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	43

Compressor's data

Cylinder capacity [cm ³]:	6,7
Displacement [m ³ /h]:	1,1
Weight [kg]:	9,6
Oil charge [cm ³]:	345
Oil type:	ISO VG 19 ESTER

Engine's data


Engine type:	RSIR
Power [KM]:	1/5
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	10,9
Running winding resistance (25°C) [Ω]:	12,59
Starting winding resistance (25°C) [Ω]:	22,02

Electrical data

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [μF]:	

Private Picture Copyright: WWW.MBSM.PRO

RSIR

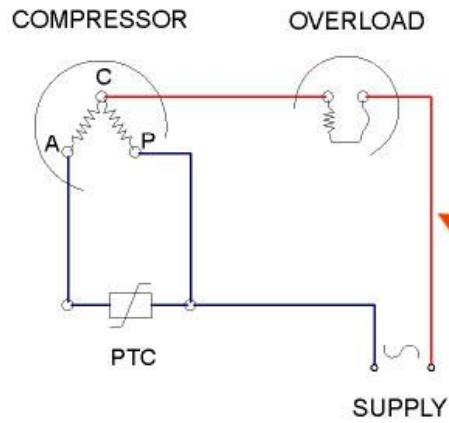

Private Picture Copyright : WWW.MBSM.PRO

■ R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE -23.3°C kcal/h	CECOMAF -25°C W	ASHRAE -23.3°C W/W	CECOMAF -25°C W/W	ASHRAE -23.3°C W/W	CECOMAF -25°C W/W
GL45AA	LBP-R134a	1.0	43	A	96	82	1.06	0.82		
GL45AH	LBP-R134a	1.0	50	C	96	81	1.05	0.8		
GL60AA	LBP-R134a	1.6	43	A	132	114	1.14	0.89		
GL60AF	LBP-R134a	1.6	43	D	132	113	1.07	0.82		
GL60AH	LBP-R134a	1.6	43	A	133	114	1.31	1.01		
GL60AN	LBP-R134a	1.6	50	C	132	114	1.07	0.83		
GL70AA	LBP-R134a	1.5	43	A	140	128	1.18	0.92		
GL70AH	LBP-R134a	1.5	50	D	150	129	1.08	0.83		
GL70AT	LBP-R134a	1.5	43	E	144	122	1.09	0.84		
GL75AA	LBP-R134a	1.5	43	A	155	133	1.18	0.92		
GL80AA	LBP-R134a	1.5	43	A	173	148	1.10	0.83		
GL80AF	LBP-R134a	1.5	43	D	166	141	1.14	0.88		
GL80AH	LBP-R134a	1.5	43	A	175	150	1.35	1.06		
GL80AN	LBP-R134a	1.4	43	A	196	168	1.36	1.06		
GL90AA	LBP-R134a	1.4	43	A	195	167	1.19	0.93		
GL90AH	LBP-R134a	1.4	43	A	215	182	1.30	1.06		
GL90AN	LBP-R134a	1.4	50	D	190	169	1.1	0.85		
GL90AT	LBP-R134a	1.4	43	E	190	161	1.19	0.92		
GL99AA	LBP-R134a	1.4	43	A	214	182	1.24	0.96		
GL99AH	LBP-R134a	1.4	43	A	215	182	1.30	1.06		
GL80AD	LBP-R134a	1.5	43	W	0	0	0	0		
GL90AD	LBP-R134a	1.4	43	W	0	0	0	0		



Private Picture Copyright : WWW.MBSM.PRO

ZMC

EGL70AT 0707

200-220V-50HZ

R 134 a

MADE IN EGYPT



3 412

1387458

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

Category: Solutions,Tester ok
written by www.mbsm.pro | 19 December 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

BRAND

◦ – ZMC

TECHNICAL SPECIFICATIONS :

- MODEL: EGL 90 AA
- POWER: 1/4 Hp
- VOLTAGE: 220 – 240 V
- WATT: 227.00 W
- REFRIGERANT GAS: R 134
- K.CAL: 195.00 Cal.

Features : The compressors form the basis of the refrigerant system and function to compress the gas from the evaporation to the condensation pressure.

USAGE PLACES :

It is used in Refrigerator devices belonging to all brands and models.

INSTRUCTIONS FOR USE:

Zmc EGL90AA; It is recommended to be used by a specialist authorized or authorized service.



[Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger](#)

[Mbsm_dot_pro_private_PDF_cubigel-katalogTélécharger](#)