

Mbsm.pro, Compressor, B43H, HUAYI,  
1/7 Hp, LBP, ACC, CUBIGEL, Danfoss,  
RSIR , r134a

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



HUAYI

B43H

R134a

220-240V~50/60Hz (5)



A008210



HUAYI COMPRESSOR(JINGZHOU)CO.,LTD.

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, B43H, HUAYI, 1/7 Hp, LBP, ACC, CUBIGEL, RSIR , r134a

# Mbsm.pro, compressor, Cubigel, Huayi, LBP, R290, 220 – 240V/1/50Hz, 1/3 hp, CSIR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, compressor, Cubigel, Huayi, LBP, R290, 220 – 240V/1/50Hz, 1/3 hp, CSIR

# Mbsm.pro, Compressor, ACC, Cubigel, Huayi, Electrolux, ZEM, MPT14LA, MPT14RA, LBP, R404A, R507, 1/2HP, 220-240V

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor Tecumseh L` Unite CAJ2432Z, LBP – R404A, 220 – 240V, 50 Hz, 1 phase, discharge: 18.3 cm<sup>3</sup>, oil type: POE, oil charge: 887 cm<sup>3</sup>, electrical equipment: CSR, cooling power 381 W at -35 / +40 °C, connection: suction: 1/2 inch, discharge: 5/16 inch, sound level: 56 dBA, start capacitor: 8 8 uF/250V, run capacitor: 15 uF/400V, expansion device: capillary or expansion valve, height: 271 mm, weight: 21.5kg

Type: Low back pressure (LBP)

Refrigerant: R404a/507

Displacement: 14.32cm<sup>3</sup>

Power: 1/2CV

Voltage: 230V – 50Hz

Single-phase

Motor type: CSR

Weight: 13.4 kg

Evaporation temperature

-40°C: 243W


-30°C: 420W

-25°C: 535W

-10°C: 988W



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

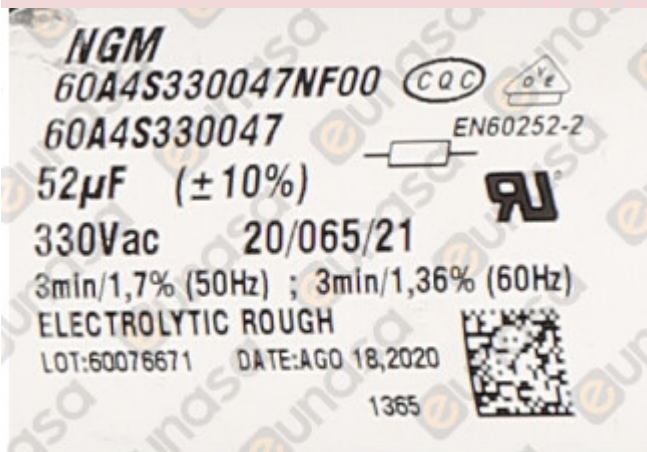

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_MPT14LATélécharger

Mbsm.pro, Compressor, cubigel, huayi, ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm<sup>3</sup>, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm<sup>3</sup>, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
344	276	216	166	124	92

<b>Shipping Class</b>	Standard
<b>Scope Of Application</b>	LBP
<b>Lieferzeit</b>	2-3 Wochen
<b>Type Of Construction</b>	Piston
<b>Condensation Temperature</b>	55°C

<b>Maker</b>	ACC
<b>Manufacturer No.</b>	HPY14AA
<b>Displacement In Cm3</b>	14.32
<b>Measuring Requirements</b>	Ashrae
<b>Refrigerants</b>	R600a
<b>Series</b>	HPY
<b>Condensing Units Compressors</b>	Compressors
<b>Suspense</b>	220-240V
<b>Weight In Kg</b>	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm<sup>3</sup>, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm<sup>3</sup>, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with "immediately available" and "scarce stock", usually delivery within 2 days. For "currently not available" delivery time usually 2 weeks or delivery time in urgent cases contact us.

---

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm <sup>3</sup> ):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR

Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_HPYP14AA-1Télécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_HPYP14AATélécharger](#)

---

Compressor, R134A, GLY12RGA, 10,7cm<sup>3</sup>,  
HMBP, 230V, 3/8HP, CUBIGEL, HUAYI

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Model	Displacement (cm <sup>3</sup> )	Refrigerant	Application	Compressor Cooling	Voltage/Frequency	Frequency (Hz)	Motor Type	Cooling (kCal/h)	COP (W/W)	Cooling (W)	COP (W/W)	Technical Data Sheet (*)
GL45MG	4,56	R134a	HBP	S	230V 50/60Hz	~1	50 CSIR	352	1,95	340	1,67	GL45MG
GL45MG	4,56	R134a	HBP	S	230V 50/60Hz	~1	60 CSIR	412	1,92	398	1,65	GL45MG
GL60MG	5,98	R134a	HBP	S	230V 50/60Hz	~1	60 CSIR	520	2,02	499	1,73	GL60MG
GL60MG	5,98	R134a	HBP	S	230V 50/60Hz	~1	50 CSIR	445	1,99	427	1,70	GL60MG
GL80MG	7,57	R134a	HBP	S	230V 50/60Hz	~1	60 CSIR	702	2,15	674	1,84	GL80MG
GL80MG	7,57	R134a	HBP	S	230V 50/60Hz	~1	50 CSIR	600	2,10	576	1,78	GL80MG
GL90MG	8,85	R134a	HBP	S	230V 50/60Hz	~1	50 CSIR	685	2,10	661	1,79	GL90MG
GL90MG	8,85	R134a	HBP	S	230V 50/60Hz	~1	60 CSIR	800	2,11	772	1,83	GL90MG
GLY12RAa	10,70	R134a	HBP	F	220-240V 50Hz	~1	50 CSIR	900	2,30	867	1,97	GLY12RAa
GLY12RAb	10,70	R134a	HBP	F	220-240V 50Hz	~1	50 CSR	900	2,57	867	2,20	GLY12RAb
GLY12RGa	10,70	R134a	HBP	F	200-220/220-230V 50/60Hz	~1	50 CSIR	900	2,19	867	1,87	GLY12RGa
GLY12RGa	10,70	R134a	HBP	F	200-220/220-230V 50/60Hz	~1	60 CSIR	1.038 2,22		1.007 1,90		GLY12RGa
GLY12RGb	10,70	R134a	HBP	F	200-220/220-230V 50/60Hz	~1	50 CSR	900 2,32		867 1,98		GLY12RGb
GLY12RGb	10,70	R134a	HBP	F	200-220/220-230V 50/60Hz	~1	60 CSR	1.038 2,40		1.007 2,07		GLY12RGb
GP14TB	14,17	R134a	HBP	F	220-240V 50Hz	~1	50 CSIR	1.030 2,03		998 1,76		GP14TB
GP16TB	16,15	R134a	HBP	F	220-240V 50Hz	~1	50 CSIR	1.240 2,09		1.204 1,80		GP16TB
GP16TE	16,15	R134a	HBP	F	115V 60Hz	~1	60 CSIR	1.450 1,96		1.408 1,69		GP16TE
GP16TG	16,15	R134a	HBP	F	200-220/230V 50/60Hz	~1	50 CSIR	1.240 2,09		1.204 1,81		GP16TG
GP16TG	16,15	R134a	HBP	F	200-220/230V 50/60Hz	~1	60 CSIR	1.450 2,00		1.408 1,74		GP16TG
GPM16RA	16,15	R134a	HBP	F	220-240V 50Hz	~1	50 CSIR	1.351 2,09		1.317 1,79		GPM16RA

(\*) Under standard conditions

## Additional information

Voltage (V)	230Vac
Frequency (hz)	50
Range	MBP
Displacement (cm3)	10,7 cm <sup>3</sup>
Cooling capacity (W)	608W
Conditions (°C)	-10 / +45C
Refrigerant	R134A
Suction line	8.1mm juotettava
Liquid line	6,5mm juotettava
Height (mm)	198mm
Weight (kg)	10,43kg
Oil	ISO VG 32 Ester

# Technical data

- Model: **GLY12RAa**
- Refrigerant Gas: **R-134a**
- Pression/temperature: **HBP**
- Power: **3/8 HP**
- Voltage: **230 V**
- Current Type: **Single-Phase**
- Frequency: **50 Hz**
- Compressor Type: **Hermetic**
- Displacement: **10.7 cm<sup>3</sup>**
- Power Cons. -10°C: **293 W**
- Power Cons. -5°C: **322 W**
- Efficiency 0°C: **351 W**
- Power Cons. +5°C: **380 W**
- Power Cons. +7,2°C: **392 W**
- T° Condensation: **40 °C**
- Cooling Cap. -15°C: **408 Kcal/h**
- Cooling Cap. -10°C: **512 Kcal/h**
- Cooling Cap. -5°C: **642 Kcal/h**
- Cooling Cap. 0°C: **797 Kcal/h**
- Cooling Cap. 5°C: **977 Kcal/h**
- Cooling Cap. 7.2°C: **1065 Kcal/h**
- Cooling Cap. 10°C: **1184 Kcal/h**
- Test Type: **Ashare 46**

Mbsm\_dot\_pro\_private\_PDF\_pdf-GLY12RAaTélécharger

	Model	Displacement (cm <sup>3</sup> )	Refrigerant	Application	Compressor Cooling	Voltage/Frequency	Frequency (Hz)	Motor Type	ASHRAE (*)		CECOMAF (*)		Te Da
									Cooling (kCal/h)	COP (W/W)	Cooling (W)	COP (W/W)	
	GL45MG	4.56	R134a	HBP	S	230V 50/60Hz ~1	50	CSIR	352	1.95	340	1.87	GI
	GL45MG	4.56	R134a	HBP	S	230V 50/60Hz ~1	60	CSIR	412	1.92	398	1.85	GI
	GL60MG	5.98	R134a	HBP	S	230V 50/60Hz ~1	60	CSIR	520	2.02	499	1.73	GI
	GL60MG	5.98	R134a	HBP	S	230V 50/60Hz ~1	50	CSIR	445	1.99	427	1.70	GI
	GL80MG	7.57	R134a	HBP	S	230V 50/60Hz ~1	60	CSIR	702	2.15	674	1.84	GI
	GL80MG	7.57	R134a	HBP	S	230V 50/60Hz ~1	50	CSIR	600	2.10	576	1.78	GI
	GL90MG	8.85	R134a	HBP	S	230V 50/60Hz ~1	50	CSIR	685	2.10	661	1.79	GI
	GL90MG	8.85	R134a	HBP	S	230V 50/60Hz ~1	60	CSIR	800	2.11	772	1.83	GI
✓	GLY12RAa	10.70	R134a	HBP	F	220-240V 50Hz ~1	50	CSIR	900	2.30	887	1.97	GL'
✓	GLY12RAb	10.70	R134a	HBP	F	220-240V 50Hz ~1	50	CSR	900	2.57	887	2.20	GL'
✓	GLY12RGa	10.70	R134a	HBP	F	200-220/220-230V 50/60Hz ~1	50	CSIR	900	2.19	887	1.87	GL'
✓	GLY12RGa	10.70	R134a	HBP	F	200-220/220-230V 50/60Hz ~1	60	CSIR	1.038	2.22	1.007	1.90	GL'
✓	GLY12RGb	10.70	R134a	HBP	F	200-220/220-230V 50/60Hz ~1	50	CSR	900	2.32	887	1.98	GL'
✓	GLY12RGb	10.70	R134a	HBP	F	200-220/220-230V 50/60Hz ~1	60	CSR	1.038	2.40	1.007	2.07	GL'
	GP14TB	14.17	R134a	HBP	F	220-240V 50Hz ~1	50	CSIR	1.030	2.03	998	1.76	GI
	GP16TB	16.15	R134a	HBP	F	220-240V 50Hz ~1	50	CSIR	1.240	2.09	1.204	1.80	GI
	GP16TE	16.15	R134a	HBP	F	115V 60Hz ~1	60	CSIR	1.450	1.96	1.408	1.69	GI
	GP16TG	16.15	R134a	HBP	F	200-220/230V 50/60Hz ~1	50	CSIR	1.240	2.09	1.204	1.81	GI
	GP16TG	16.15	R134a	HBP	F	200-220/230V 50/60Hz ~1	60	CSIR	1.450	2.00	1.408	1.74	GI
✓	GPM16RA	16.15	R134a	HBP	F	220-240V 50Hz ~1	50	CSIR	1.351	2.09	1.317	1.79	GP





Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

---

Compressor, NPT12FSC, CUBIGEL, R290,  
12,10ccm, LBP, 3/8HP, 220 V 50/60 Hz

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor, NPT12FSC, CUBIGEL, R290, 12,10ccm, LBP, 3/8HP, 220 V 50/60 Hz

Electrolux Professional Compressor,  
R404a/R507, MX18FB, 220-240V, 50Hz,  
17,3kg, 5/8HP, 571W, MX18 FB,  
CUBIGEL, LBP, HERMETIC COMPRESSOR,  
Zanussi ALF1103 Fridge

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Electrolux Professional Compressor, R404a/R507, MX18FB, 220-240V, 50Hz, 17,3kg, 5/8HP, 571W, MX18 FB, CUBIGEL, LBP, HERMETIC COMPRESSOR, Zanussi ALF1103 Fridge

# Tecumseh, Copeland, Compressor, Cross, Reference, P12FW, Compressor, R-12, 1/3HP, 230V, HMBP, ACC- ELECTROLUX, CUBIGEL/HUAYI

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Tecumseh, Copeland, Compressor, Cross, Reference, P12FW, Compressor, R-12,  
1/3HP, 230V, HMBP, ACC-ELECTROLUX, CUBIGEL/HUAYI

---

# ZMC, zanussi, Made in Egypt, Compressors

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022

## R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">GL45AA</a>	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> <a href="#">GL45AN</a>	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> <a href="#">GL60AA</a>	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> <a href="#">GL60AF</a>	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> <a href="#">GL60AH</a>	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> <a href="#">GL60AN</a>	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AA</a>	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL70AN</a>	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AT</a>	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> <a href="#">GL75AA</a>	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL80AA</a>	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL80AF</a>	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> <a href="#">GL80AH</a>	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> <a href="#">GL80AN</a>	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> <a href="#">GL90AA</a>	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL90AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL90AN</a>	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> <a href="#">GL90AT</a>	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ <input type="checkbox"/> <a href="#">GL99AA</a>	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ <input type="checkbox"/> <a href="#">GL99AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL80AD</a>	LBP::R134a	1/5	43	W	0	0	0	0		
▶ <input type="checkbox"/> <a href="#">GL90AD</a>	LBP::R134a	1/4	43	W	0	0	0	0		

## R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">GL45AA</a>	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> <a href="#">GL45AN</a>	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> <a href="#">GL60AA</a>	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> <a href="#">GL60AF</a>	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> <a href="#">GL60AH</a>	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> <a href="#">GL60AN</a>	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AA</a>	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL70AN</a>	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AT</a>	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> <a href="#">GL75AA</a>	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL80AA</a>	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL80AF</a>	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> <a href="#">GL80AH</a>	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> <a href="#">GL80AN</a>	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> <a href="#">GL90AA</a>	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL90AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL90AN</a>	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> <a href="#">GL90AT</a>	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ <input type="checkbox"/> <a href="#">GL99AA</a>	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ <input type="checkbox"/> <a href="#">GL99AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL80AD</a>	LBP::R134a	1/5	43	W	0	0	0	0		
▶ <input type="checkbox"/> <a href="#">GL90AD</a>	LBP::R134a	1/4	43	W	0	0	0	0		

## R12

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">L45AV</a>	LBP::R12	1/8	43	B	221	192	0.91	0.71		
▶ <input type="checkbox"/> <a href="#">L55AV</a>	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> <a href="#">L55BV</a>	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> <a href="#">L76AV</a>	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> <a href="#">L76BV</a>	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> <a href="#">L88AV</a>	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> <a href="#">L88BV</a>	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> <a href="#">LT45AV</a>	LBP::R12	1/8	50	B	94	83	1.04	0.83		
▶ <input type="checkbox"/> <a href="#">LT55AV</a>	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> <a href="#">LT55BV</a>	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> <a href="#">LT76BV</a>	LBP::R12	1/5	50	B	155	137	1.14	0.91		
▶ <input type="checkbox"/> <a href="#">LT88BV</a>	LBP::R12	1/4	50	B	190	169	1.16	0.93		
▶ <input type="checkbox"/> <a href="#">P12BW</a>	LBP::R12	1/3	43	A	221	192	0.91	0.71		

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_catalogo\_cubigel\_R134aTélécharger

## R600a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">HL80AH</a>	LBP::R600a	1/7	43	A	104	89	1.37	1.06		
▶ <input type="checkbox"/> <a href="#">HL90AH</a>	LBP::R600a	1/7	43	A	115	99	1.38	1.08		
▶ <input type="checkbox"/> <a href="#">HL99AH</a>	LBP::R600a	1/6	43	A	120	103	1.34	1.03		

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP <sub>a</sub> 7.2 <sub>a</sub>
					CECOMAF 5°C	ASHRAE 7.2°C	
					W	kcal/h	
▶ <input type="checkbox"/> <a href="#">GL45PB</a>	HMBP::R134a	1/6	43	A			
▶ <input type="checkbox"/> <a href="#">GL45PB</a>	HMBP::R134a	1/6	0	300			
▶ <input type="checkbox"/> <a href="#">GL45TB</a>	HMBP::R134a	1/6	43	A			
▶ <input type="checkbox"/> <a href="#">GL60PB</a>	HMBP::R134a	1/5	43	A			
▶ <input type="checkbox"/> <a href="#">GL60TB</a>	HMBP::R134a	1/5	43	A			
▶ <input type="checkbox"/> <a href="#">GL80PB</a>	HMBP::R134a	1/5	43	A			
▶ <input type="checkbox"/> <a href="#">GL80TB</a>	HMBP::R134a	F	0	300			
▶ <input type="checkbox"/> <a href="#">GL90TB</a>	HMBP::R134a	1/4	43	A			
▶ <input type="checkbox"/> <a href="#">GP12TB</a>	HMBP::R134a	3/8	43	A			

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## COMPRESSOR, MX21TBa, R404A, 1HP, CUBIGEL, HMBP, 220/240V, 50Hz, 20,72 cm<sup>3</sup>

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

### **Détails techniques**

220/240V 50Hz

puissance 1 HP – cylindrée 21,75 cc

gaz R404a/R507 HMBP

...et d'autres dispositifs

MX21TB – ACC – CELLI

MX21TB – CUBIGEL – ELECTROLUX

605093 – GEV – ITV



Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_danfoss\_MX21TBa\_R404A\_220\_50Télécharger

**Brand:** Cubigel

**UPC:** 3070063

**Manufacturer reference:** MX21TBa

**Application:** HMBP

**Power supply:** 220/240V 50Hz

**Cooling capacity:** 3047 W

**Horsepower:** 1 Hp

**Displacement:** 21.7 cm<sup>3</sup>

**Refrigerant:** R404a/R507

**Weight:** 17.5 kg

**Motor type:** CSR

**Type:** Hermetic reciprocating compressor