

**no frost, egl99aa zmc  
refrigerator, DF40, silver,  
ideal, zanussi, IDEAL  
ZANUSSI, EGL99AA ZMC, DF 40  
Elgance, Compressor, ACC  
Cubigel, Huayi, Electrolux,  
ZEM GL99AA, GL99AA, LBP ,  
R134a, 220-240V/1/50Hz, 1/4  
HP, discharge 9.93 cm<sup>3</sup>, motor  
type RSIR, LRA 14.4A**



[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GL99AATélécharger](#)

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A, expansion device: capillary, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

|   |                                     |
|---|-------------------------------------|
| Refrigerant:                            | R134a                               |
| Power range(W):                         | 101 – 200 W                         |
| Performance range (C):                  | -35 C to -10 C                      |
| Connecting size:                        | 4,9 mm                              |
| Suction:                                | 6,5 mm                              |
| Working area:                           | LBP                                 |
| Design type:                            | Hermetic                            |
| Model series:                           | GL                                  |
| Use with:                               | Capillary                           |
| Power range(HP):                        | 0-2                                 |
| Power supply:                           | 230 V                               |
| Oil type:                               | ISO VG 22 Ester                     |
| Engine type:                            | RSIR                                |
| Article condition:                      | New                                 |
| Info:                                   | Oil filled                          |
| Shipping weight:                        | 13,00 Kg                            |
| Dimensions ( length × width × height ): | 23,10 × 16,20 × 18,60<br>cm         |
| Cooling capacity condition:             | T0 -25 C, Tk +55 C                  |
| Manufacturer:                           | ACC Cubigel Huayi<br>Electrolux ZEM |
| Model:                                  | GL99AA                              |
| Stroke volume (cm3):                    | 9,93                                |
| Cooling capacity (W):                   | 174                                 |
| Power (HP):                             | 0,25                                |
| Max. Starting current (A):              | 14,4                                |
| Max. Operating current (A):             | 1,31                                |
| Engine type:                            | RSIR                                |

|                                    |                |
|------------------------------------|----------------|
| COP:                               | 0,92           |
| Note:                              | Static cooling |
| Conveying and suction volume (m3): | 1,72           |
| Oil quantity (l):                  | 0,295          |
| Compressor type:                   | Piston         |
| Cooling:                           | Static         |
| RPM:                               | 2900           |
| Power range:                       | -35 C to -10 C |
| Alternative:                       | HLY90AA, NL11F |
| Pressure line (mm):                | 4,9            |
| Suction line (mm):                 | 6,5            |

ZMC

C

GL99AA 0326

220-240V~50Hz



CE

R 134 a

MADE IN EGYPT

482



3975 6

**GL99AAa VE09**  
**220-240V 50Hz ~1**

**COMPRESSOR**

|                                 |                 |
|---------------------------------|-----------------|
| Displacement (cm <sup>3</sup> ) | 9.95            |
| Diameter (mm)                   | 25.4            |
| Stroke (mm)                     | 19.62           |
| Net Weight (Kg)                 | 9.6             |
| Oil type                        | ISO VG 22 ESTER |
| Oil charge (cm <sup>3</sup> )   | 295             |

**MOTOR**

|                              |           |
|------------------------------|-----------|
| Approximate Power (CV)       | 1/4       |
| Voltage/Frequency (V/Hz)     | 220V 50Hz |
| Voltage range (V)            | 187-264   |
| Code                         | -         |
| Type                         | RSIR      |
| Phase number                 | 1 PH      |
| Locked rotor current (A)     | 14.0      |
| Main W. resist. at 25°C (Ω)  | 9.96      |
| Start W. resist. at 25°C (Ω) | 20.39     |

**ELECTRICAL COMPONENTS**

|                     |                 |       |        |
|---------------------|-----------------|-------|--------|
| Relay               | PTC 3003 - K100 |       |        |
| Nominal voltage (V) | 200 - 240       |       |        |
| Resistance μ        | 14.00           |       |        |
| Protector           | MRP336JZ        | T0377 | AE11FU |

**APPLICATION**

|                         |                   |
|-------------------------|-------------------|
| Application             | Low back pressure |
| Refrigerant             | R134a             |
| Evaporating (°C)        | -35 to -10        |
| Expansion               | Capillar          |
| Comp. cooling           | Static            |
| Max. ambient temp. (°C) | 43                |

**NOMINAL PERFORMANCE**

|                      | CYCLE A | CYCLE B |
|----------------------|---------|---------|
| Cooling capacity (W) | 175     | 238     |
| Input power (W)      | 189     | 200     |
| EER (kcal/Wh)        | 0.79    | 1.02    |
| COP (W/W)            | 0.92    | 1.19    |
| Current (A)          | 1.31    | 1.34    |

**TEST CONDITIONS**

| Evaporating temp. (°C)      | -25.0     | -23.3     |
|-----------------------------|-----------|-----------|
| Condensing temp. (°C)       | 55.0      | 55.0      |
| Liq.t. entering expan. (°C) | 55.0      | 32.0      |
| Ambient t. and return (°C)  | 32.0      | 32.0      |
| Tens/Freq (V/Hz)            | 220V 50Hz | 220V 50Hz |



|                             |          |  |         |                    |
|-----------------------------|----------|--|---------|--------------------|
| KGT1 موديل                  |          | الشركة العالمية لصناعة الأجهزة المنزلية - الاسكا |         |                    |
| السعة، ١، ٣ اقدم            | ٢٢٠ فولت | ٥٠ هيرتز   | ١٩٥ وات | ١، ٢ امبير         |
| الشحنة، ١٧٠ جم ف ١٣٤ ا      |          | التصنيف: ST                                      |         | درجة الحماية، IPX2 |
| صنع في مصر<br>Made in Egypt |          | ٢٠٠٥/٢٢٠   | ٣ ٢     | No. 200            |
|                             |          | ٢٠٠٥/٢٢٠   |         | سنة الانتاج        |



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)




REDMI NOTE 9 PRO  
AI QUAD CAMERA

Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

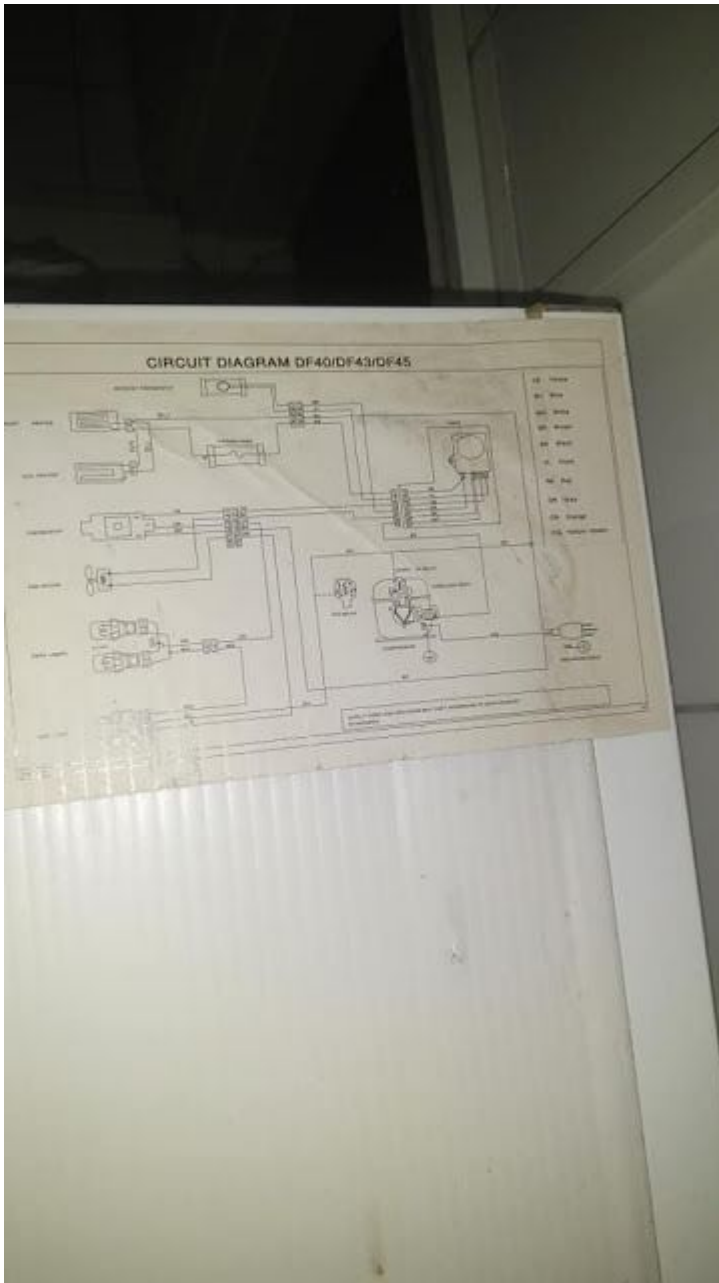

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**ZMC** EGL99AA 1002

220-240V~50Hz


**R 134 a**

MADE IN EGYPT



3

480

0250659 

# IDEAL ZANUSSI

MODEL

**DF 40 Elegance**

TYPE

**Nofrost**

COLOR

**WHITE**

CODE



**922213401**

SERIAL NUMBER :



**DF40 Feb. 10 11018589**

| REFRIGERANT   | GAS CHARGE   | CAPACITY       |
|---------------|--------------|----------------|
| <b>R134 a</b> | <b>130 g</b> | <b>340 Lit</b> |
| VOLTAGE       | FREQUENCY    | CURRENT        |
| <b>220V</b>   | <b>50 Hz</b> | <b>1.4 A</b>   |

**Made In Egypt By**  
Delt Engineering Industrials  
6th October City

Under License Of  
Electrolux International SpA - Italy

