
Mbsm.pro, compressor, Electrolux, ZEM, GL45AA, LBP, 1/8 hp

Category: compressor
written by www.mbsm.pro | 24 February 2022

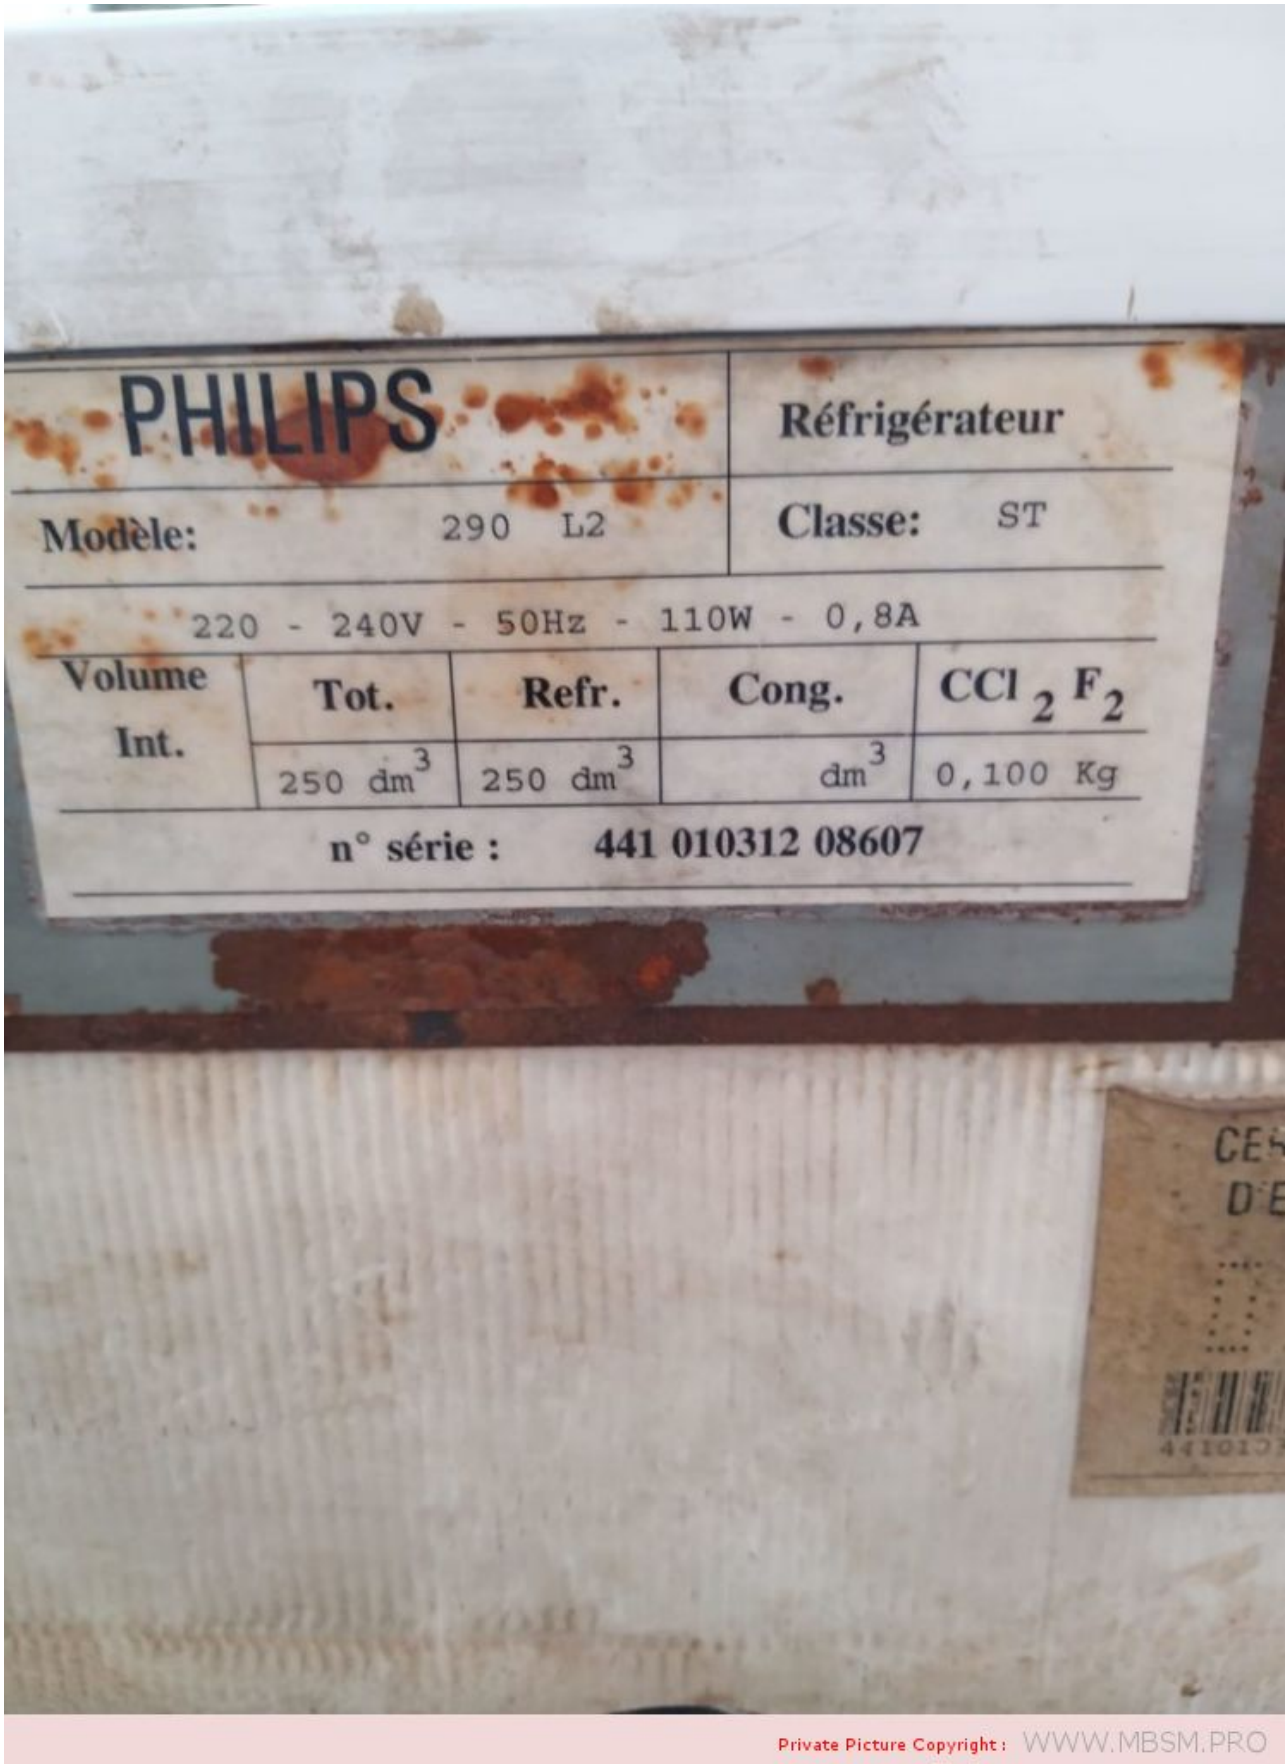


Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Electrolux, ZEM, GL45AA, LBP, 1/8 hp

Mbsm.pro, PDF, File, Cubigel Katalog, r134a, Huayi, Electrolux, ZEM

Category: Files
written by www.mbsm.pro | 24 February 2022

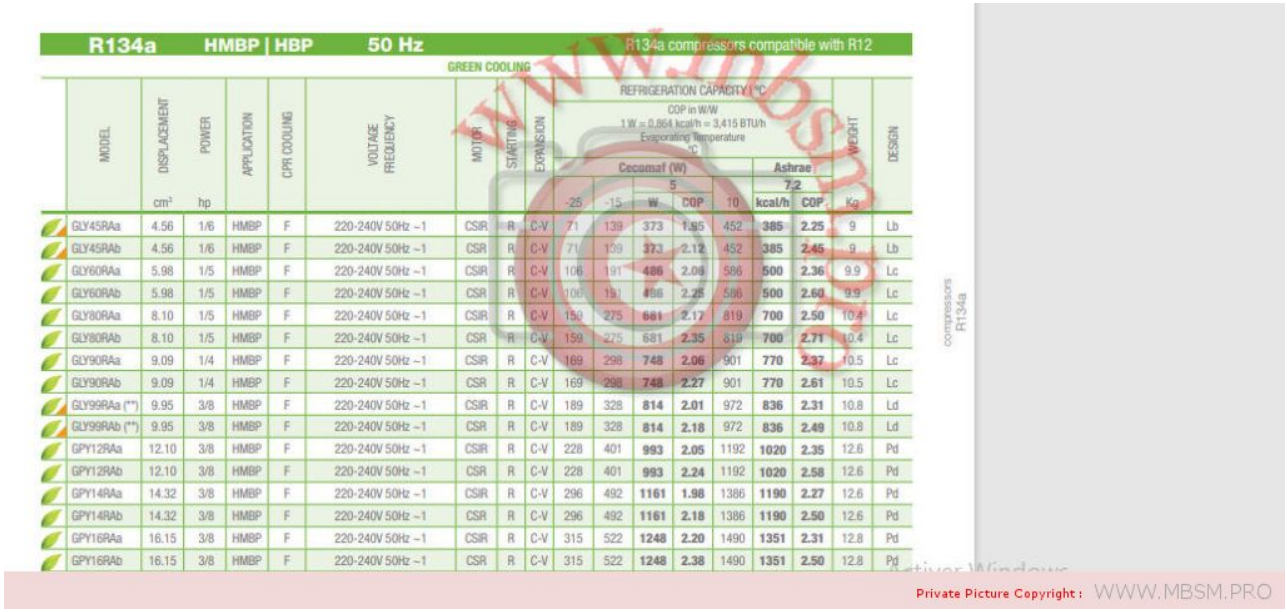

R134a HMBP | HBP 50 Hz — R134a compressors compatible with R12 — GREEN COOLING

MODEL	DISPLACEMENT cm³	POWER hp	APPLICATION	CPR COOLING	VOLTAGE FREQUENCY	MOTOR	STARTING	EXPANSION	REFRIGERATION CAPACITY (W) COP in W/W 1 W = 0,864 kcal/h = 3,415 BTU/h Evaporating Temperature °C: Cecomaf -25	Cecomaf -15	Cecomaf 5 W	Cecomaf 5 COP	Cecomaf 10	Ashrae 7,2 kcal/h	Ashrae 7,2 COP	WEIGHT Kg	DESIGN
GLY45RAa	4.56	1/6	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	71	139	373	1.85	452	385	2.25	9	Lb
GLY45RAb	4.56	1/6	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	71	139	373	2.12	452	385	2.45	9	Lb
GLY60RAa	5.98	1/5	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	106	191	486	2.09	586	500	2.36	9.9	Lc
GLY60RAb	5.98	1/5	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	106	191	486	2.28	586	500	2.60	9.9	Lc
GLY80RAa	8.10	1/5	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	159	275	681	2.17	819	700	2.50	10.4	Lc
GLY80RAb	8.10	1/5	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	159	275	681	2.35	819	700	2.71	10.4	Lc
GLY90RAa	9.09	1/4	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	169	298	748	2.06	901	770	2.37	10.5	Lc
GLY90RAb	9.09	1/4	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	169	298	748	2.27	901	770	2.61	10.5	Lc
GLY99RAa (**)	9.95	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	189	328	814	2.01	972	836	2.31	10.8	Ld
GLY99RAb (**)	9.95	3/8	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	189	328	814	2.18	972	836	2.49	10.8	Ld
GPY12RAa	12.10	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	228	401	993	2.05	1192	1020	2.35	12.6	Pd
GPY12RAb	12.10	3/8	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	228	401	993	2.24	1192	1020	2.58	12.6	Pd
GPY14RAa	14.32	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	296	492	1161	1.98	1386	1190	2.27	12.6	Pd
GPY14RAb	14.32	3/8	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	296	492	1161	2.18	1386	1190	2.50	12.6	Pd
GPY16RAa	16.15	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	315	522	1248	2.20	1490	1351	2.31	12.8	Pd
GPY16RAb	16.15	3/8	HMBP	F	220-240V 50Hz ~1	CSR	R	C-V	315	522	1248	2.38	1490	1351	2.50	12.8	Pd

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, PDF, File, Cubigel Katalog, r134a, Huayi, Electrolux, ZEM

Mbsm.pro, Pdf, Book, Catalog, Electrolux, Compressor, r12, R22

Category: Files
written by www.mbsm.pro | 24 February 2022



ACC COMPRESSORS

HMBP

R22 50 Hz	CECOMAF (W) -20	-15	5 W	5 COP	10	ASHRAE 7,2 kcal/h	ASHRAE 7,2 COP	R22 50 Hz
220-240V 50Hz ~1								
L40TNa	1/6	F	4.04	149	194	458	1.68	544	460	1.91	C	300	9.5	RSIR	P
L40TNb	1/6	F	4.04	149	194	458	1.68	544	460	1.91	C-V	300	9.5	CSIR	R
L45TN	1/5	F	4.50	156	206	497	1.68	592	500	1.91	C-V	300	9.5	CSIR	R
L57TNa	1/5	F	5.67	194	255	612	1.72	728	615	1.93	C	300	9.5	RSIR	P
L57TNb	1/5	F	5.67	194	255	612	1.72	728	615	1.93	C-V	300	9.5	CSIR	R
L76TN	3/8	F	7.57	268	347	816	1.72	971	800	1.95	C-V	470	10.0	CSIR	R
L88TN	3/8	F	8.85	322	416	975	1.74	1161	980	1.97	C-V	400	10.6	CSIR	R
P10TN	3/7	F	10.16	394	509	1194	2.03	1421	1200	2.31	C-V	400	13.3	CSIR	R
P12TN	1/2	F	12.00	412	537	1312	2.00	1574	1323	2.26	C-V	400	12.3	CSIR	R
R18TN	3/4	F	18.10	554	755	2022	2.16	2454	2050	2.46	C-V	640	20.3	CSIR	R
S18TN	3/4	F	18.10	554	755	2022	2.16	2454	2050	2.46	C-V	667	21.8	CSIR	R
S22TN															

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF-Electrolux-Compressor-r12-R22-1ph-1Télécharger

Mbsm.pro, Compressor, ELECTROLUX, 3/4 Hp ++ (big), R-12, S26TY, HMBP

Category: compressor
written by www.mbsm.pro | 24 February 2022



Private Picture Copyright : WWW.MBSM.PRO
Private Picture Copyright : WWW.MBSM.PRO

Commercial R12 – Medium Suction Temperature

Capacity range (watts)	Aspera	Kirby	Old Kirby Model	Danfoss	L’Unite Hermetique	Unidad Electrolux	Kelvinator	Necchi	Bulkon
201-250		AE6LMY	AE67ZD7 AE6LMA	TL4B		L57PX	S88ND	M4J	
250-300								M5J	
301-350	A5144A	AE8MG	AE59ZF9 AE8LMA						
351-400		AE9MHY	AE4425A AE9MHA	FR6B	CAE59ZF9	L76PX		M7J	
401-450	A5160A			FR7.5B		L68TY	S54FD		
450-500	A6170A	AEV9LMY	AE7416A AE10LMA	FR8.5B	CAE41ZF11	L88TX	S44ND	M9J	
501-550							S54FD S44CFD	M11, A9	
551-600	T6185A	AE12LMY	AE12LJ	FR10B	CAE4440A	P12TY	S33FD S33TF		
601-650	E6187A			FR11B SC10B					
651-700		AE14LMY	AE7423A AE14LMA			P14TY			KB14B1
701-800	T6213A			SC12B	CAJ4452A			A13	
801-900		AE16LMY	AE16LMA AE16LJ	SC15B				N17	KB19B1
901-1000		AJ18MY	AJ7428A						KB19B1
1001-1200	T6215A	AJ22LMY	AJ7434A AJ22LJ	SC18B	CAJ4461A	S18TY	S5050FDH		KB23B1
1201-1400	J6220A	AJ26LMY	AJ7445A AJ26LJ	SC21B		S26TY	S7575FDH		KB26B1
1401-2000	J6226A	AJ34LMY	AJ7457A AJ34LJ		CAJ4511A	S34TY	S1010FDH		KB37B1
2001-2500	H6238A	AH49MHY	AH4514A		CAH4518A TAH4518A				
2501-3500	H6253A	AH74MHY	AH4521A		CAH4524A TAH4524A				



Private Picture Copyright : WWW.MBSM.PRO

HMBP																
R12 50 Hz				CECOMAF (W)					ASHRAE		R12 50 Hz					
				-25	-15	5		10	7.2							
						W	COP		kcal/h	COP						
220-240V 50Hz ~1																
L45PX	1/6	F	4.50	77	131	325	1.68	391	330	1.91	C	300	8.4	RSIR	R	
L57PX	1/5	F	5.67	97	171	422	1.84	505	427	2.10	C	300	9.5	RSIR	R	
L76TX	1/5	F	7.57	131	223	545	1.84	654	553	2.07	C-V	300	9.5	CSIR	R	
L88TY	1/4	F	8.85	165	276	646	1.87	768	652	2.11	C-V	300	10.0	CSIR	R	
P12TY	3/8	F	12.00	209	356	871	1.82	1044	882	2.05	C-V	400	11.2	CSIR	R	
P14TY	3/8	F	14.00	242	412	985	1.73	1176	996	1.96	C-V	400	11.5	CSIR	R	
R18TY	1/2	F	18.10	277	533	1328	2.02	1586	1343	2.30	C-V	640	19.9	CSIR	R	
X18TY	1/2	F	18.40	322	544	1323	1.95	1587	1340	2.20	C-V	500	16.1	CSIR	R	
S26TY	3/4	F	25.93	391	770	1933	2.01	2307	1955	2.29	C-V	887	22.7	CSIR	R	
S34TY	1	F	34.42	643	1171	2752	2.31	3255	2771	2.60	C-V	887	22.7	CSR	R	
200-220/230V 50/60Hz ~1																
L45PX	1/6	F	4.50	77	131	325	1.59	391	330	1.79	C	300	8.4	RSIR	R	
L57PX	1/5	F	5.67	97	173	389	1.75	456	390	1.96	C	300	9.5	RSIR	R	
S18TY	1/2	F	18.10	277	533	1329	1.99	1586	1344	2.26	C-V	887	21.8	CSIR	R	
X18TY	1/2	F	18.40	322	544	1323	1.93	1587	1340	2.18	C-V	500	16.1	CSIR	R	
S26TY	3/4	F	25.93	391	770	1933	2.00	2307	1954	2.27	C-V	887	22.7	CSIR	R	
S34TY	1	F	34.42	643	1171	2752	2.27	3255	2770	2.58	C-V	887	22.7	CSR	R	

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_S26TYTélécharger

Mbsm.pro, Compressor, ACC, Cubigel, Huayi, Electrolux, ZEM, MPT14LA , MPT14RA, LBP , R404A, R507, 1/2HP, 220-240V

Category: compressor
written by www.mbsm.pro | 24 February 2022




Private Picture Copyright : WWW.MBSM.PRO

Compressor Tecumseh L` Unite CAJ2432Z, LBP – R404A, 220 – 240V, 50 Hz, 1 phase, discharge: 18.3 cm3, oil type: POE, oil charge: 887 cm3, electrical equipment: CSR, cooling power 381 W at -35 / +40 °C, connection: suction: 1/2 inch, discharge: 5/16 inch, sound level: 56 dBA, start capacitor: 8 8 uF/250V, run capacitor: 15 uF/400V, expansion device: capillary or expansion valve, height: 271 mm, weight: 21.5kg

Type: Low back pressure (LBP)
Refrigerant: R404a/507
Displacement: 14.32cm³
Power: 1/2CV
Voltage: 230V – 50Hz
Single-phase
Motor type: CSR
Weight: 13.4 kg
Evaporation temperature
-40°C: 243W
-30°C: 420W
-25°C: 535W
-10°C: 988W



Private Picture Copyright : WWW.MBSM.PRO

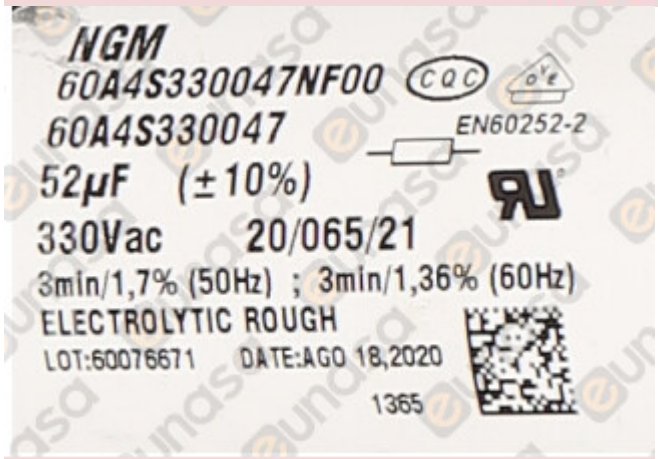

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_MPT14LATélécharger

Mbsm.pro, Compressor, cubigel, huayi, ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor
written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm3, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm3, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W,Cooling capacity

–10 °C	–15 °C	–20 °C	–25 °C	–30 °C	–35 °C
344	276	216	166	124	92

Shipping Class	Standard
Scope Of Application	LBP
Lieferzeit	2-3 Wochen
Type Of Construction	Piston
Condensation Temperature	55°C

Maker	ACC
Manufacturer No.	HPY14AA
Displacement In Cm3	14.32
Measuring Requirements	Ashrae
Refrigerants	R600a
Series	HPY
Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm3, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm3, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm3):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR

Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1



Private Picture Copyright : WWW.MBSM.PRO



Mbsm_dot_pro_private_PDF_HPY14AA-1Télécharger
Mbsm_dot_pro_private_PDF_HPY14AATélécharger

Compressor, r600a, 1/5HP, LBP, 149W, htk12aa, Electrolux, Brandt, 220-240V 50Hz, Run Capacitor: 4.0 µF (5.0 µF as alternative) , Motor type

RSCR/RSIR

Category: compressor
written by www.mbsm.pro | 24 February 2022



compressor/compressor ACC – Electrolux HTK12AA, LBP – R600a, Power consumption 1/5HP++, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 11.1 cm3, Oil type mineral oil, Oil quantity 170 cm3, Power 116 W at -25 / +55°C, Power consumption 149 W, Current 0.77, Weight 8.6Cooling capacity

–10 °C	**–15 °C**	**–20 °C**	**–25 °C**	**–30 °C**	**–35 °C**
300	240	188	144	107	78

Shipping Class Standard

Scope Of Application	LBP
Lieferzeit	2-3 Wochen
Type Of Construction	Piston
Condensation Temperature	55°C
Maker	ACC
Manufacturer No.	HPY12AA
Displacement In Cm3	11.1
Measuring Requirements	Ashrae
Refrigerants	R600a
Series	HPY
Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	12.7

1. Be the first to review this product

Mbsm_dot_pro_private_PDF_HTK12AA-1-1Télécharger
Mbsm_dot_pro_private_PDF_HTK12aa-1Télécharger



Private Picture Copyright : WWW.MBSM.PRO



---

no frost, egl99aa zmc refrigerator, DF40, silver, ideal, zanussi, IDEAL ZANUSSI, EGL99AA ZMC, DF 40 Elgance, Compressor, ACC Cubigel, Huayi, Electrolux, ZEM GL99AA, GL99AA, LBP , R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm3, motor type RSIR, LRA 14.4A

Category: compressor
written by www.mbsm.pro | 24 February 2022



Mbsm_dot_pro_private_PDF_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger
Mbsm_dot_pro_private_PDF_GL99AATélécharger

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm3, motor type RSIR, LRA 14.4A, expansion device: capillary, cooling: static,weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA

Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5



Private Picture Copyright : WWW.MBSM.PRO

cubigel compressors

TECHNICAL DATA SHEET

GL99AAa VE09
220-240V 50Hz ~1

COMPRESSOR	
Displacement (cm3)	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm3)	295

MOTOR	
Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25ºC (Ω)	9.96
Start W. resist. at 25ºC (Ω)	20.39

APPLICATION	
Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34
TEST CONDITIONS		
Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

ELECTRICAL COMPONENTS			
Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance µ	14,00		
Protector	MRP336JZ	T0377	AE11FU

MBSMGROUP

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




ture Copyright : WWW.MBSM.PRO



ture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

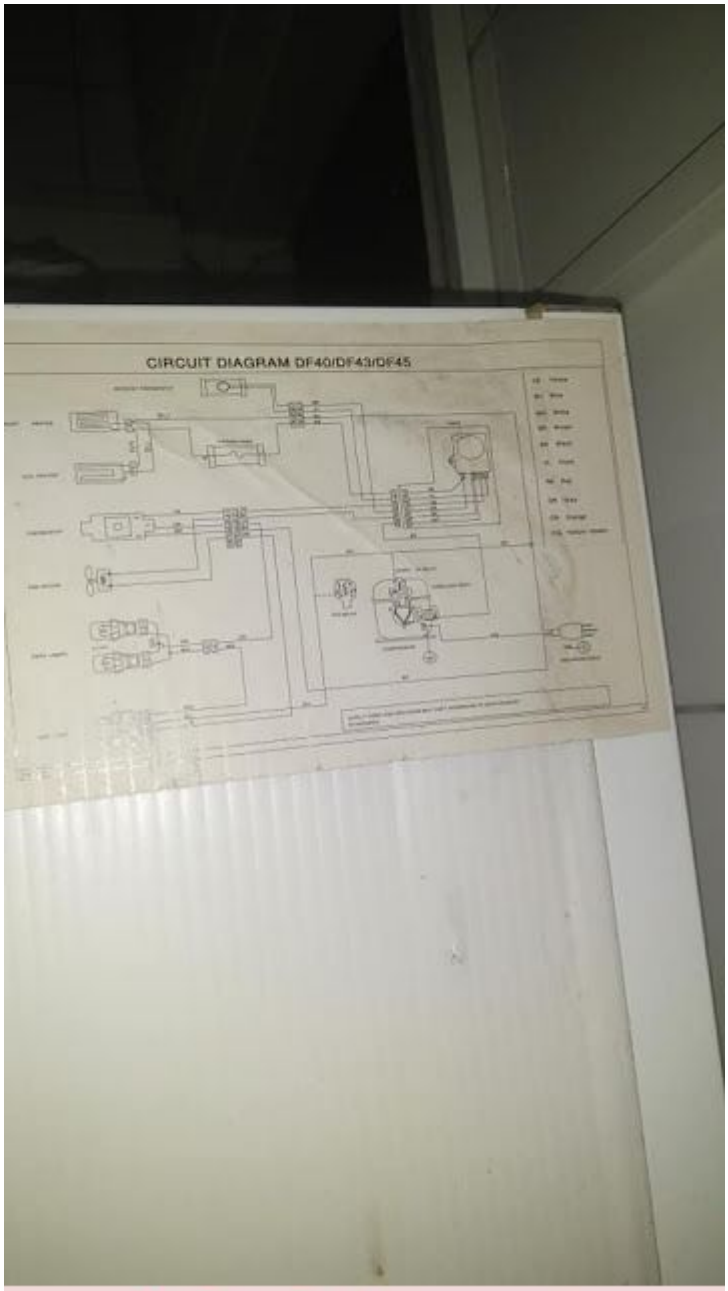

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm3, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan

cooling, weight 11 kg

Category: compressor
written by www.mbsm.pro | 24 February 2022



Private Picture Copyright : WWW.MBSM.PRO

Compressor ASPERA NEK6210GK | NEK 6210 GK

Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm3, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan cooling, weight 11 kg

Refigerant	R404A/R507
Working range[stC] **MBP**	-20 do +10
Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C)	1303
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm³]	8,77
Weight [kg]	11

Evaporating temperature +55 C

Evaporating Temperature	**Cooling Capacity +/-5%**	**Power Consumption +/-5%**	**Current Consumption +/-5%**	**Gas Flow Rate +/-5%**	**Efficiency +/-7%**			
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-20	384	447	1.525	365	2,36	11,99	1,05	1,22
-15	467	544	1.855	419	2,58	14,69	1,12	1,30
-10	574	668	2.278	470	2,79	18,18	1,22	1,42
-5	704	819	2.795	519	3,00	22,51	1,36	1,58
0	858	998	3.405	565	3,20	27,73	1,52	1,77
5	1.036	1.204	4.109	609	3,40	33,90	1,70	1,98
10	1.237	1.438	4.907	650	3,59	41,06	1,90	2,21

Substitutes for this compressor are: Electrolux ML90TB , L’Unite Hermetique/Tecumseh AE4450Z

Refrigerant: R404A, R507



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NEK6210GKTélécharger

CUBIGEL, 1/2 Hp, ELECTROLUX, COMPRESSEUR, ZANUSSI, P12TN, HMBP, R22, 220/240V 50Hz

Category: compressor
written by mahdi miled | 24 February 2022



Détails techniques
puissance 1/2 Hp – cylindrée 12,00 cm3
220/240V 50Hz
CUBIGEL
ZANUSSI
Zanussi Armoire réfrigérée ALP221 (110495), ALN221 (110501), AKP221 (111678), AKP221 (111685), DVP110V12V (730236), DVP111V12V (730237), MVP112V12V (730238), EDVN1100 (730239), EDVN1101 (730240), DVP130V12V (730260), DVP131V12V (730261), EEVNI1301 (730262), EEVN1300 (730263), EEVN1301 (730264), DVN130V12V (730265), EDVN1300 (730266), MVP130V12V (730277), MVP131V12V (730278), EMVN1300 (730289), EMVN1300 (730290), MVP110V12V (730297), MVP111V12V (730298), EMVN1100 (730305), EMVN1101 (730306), EDVP1302 (730315), EDVN1302 (730321), CA45ALHG (730331), CA45SSHG (730347), CA45ALCG (730348), CA45SSCG (730349), CA38ALHG (730364), CA38SSHG (730365), CA38ALCG (730366), CA38SSCG (730367), CA45ALMG (730403), CA45SSMG (730405), CA38ALMG (730417), CA38SSMG (730422), DVP13V14V (734021)
Zanussi Cellule de refroidissement BC11 (110010), BCF11 (110016), EEVA10/1 (739021), EEVAC10/1 (739027), ATPE061 (771000), ATCE061 (771006)



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_danfoss_P12TN_R22_220_50Télécharger



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_huayi_compressor_P12TN_R22_230_60Télécharger