Mbsm.pro, PDF, CONGELATEUR, No-Frost, ENIM, ALGERIE, REFREGERATEUR, FR 4506, FR 4506 K, FR-4506K, Classe N

Category: Files
written by www.mbsm.pro | 16 January 2021

Mbsm_dot_pro_private_PDF_HPL23YH-5-3Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-Télécharger

DAEWOO COMPRESSOR, HPL23YH-5, 199W, 1/4 Hp, R134A , 90G, CONGELATEUR, No-Frost, ENIM, ALGERIE, REFREGERATEUR, FR 4506, FR 4506 K, FR-4506K, Classe N, VoluMe Brut 447L , Volume utile 273L, Volume congélat 101L , 220-240v 50Hz

Category: compressor
written by www.mbsm.pro | 16 January 2021
Capacité totale 374 L
 Compartiment denrées fraîches 273L
 Compartiment denrées congelées 101L
Dimensions (mm) – Sans emballage : 1759X706X708mm
– Avec emballage : 1801X726X754mm Poids

net (kg) : 78Kg
Brut (kg) : 69Kg
Contrôle des températures Thermostat
Type de refroidissement : No Frost (Dynamique)
Éclairage intérieur
Alimentation : 220-230/50/HZ
Consommation d’énergie (kwh / an) 520
Classe énergétique B
Classe climatique : Tempérée T
CFC 0 %
Réfrigérant R134 A

Private Picture Copyright : WWW.MBSM.PRO

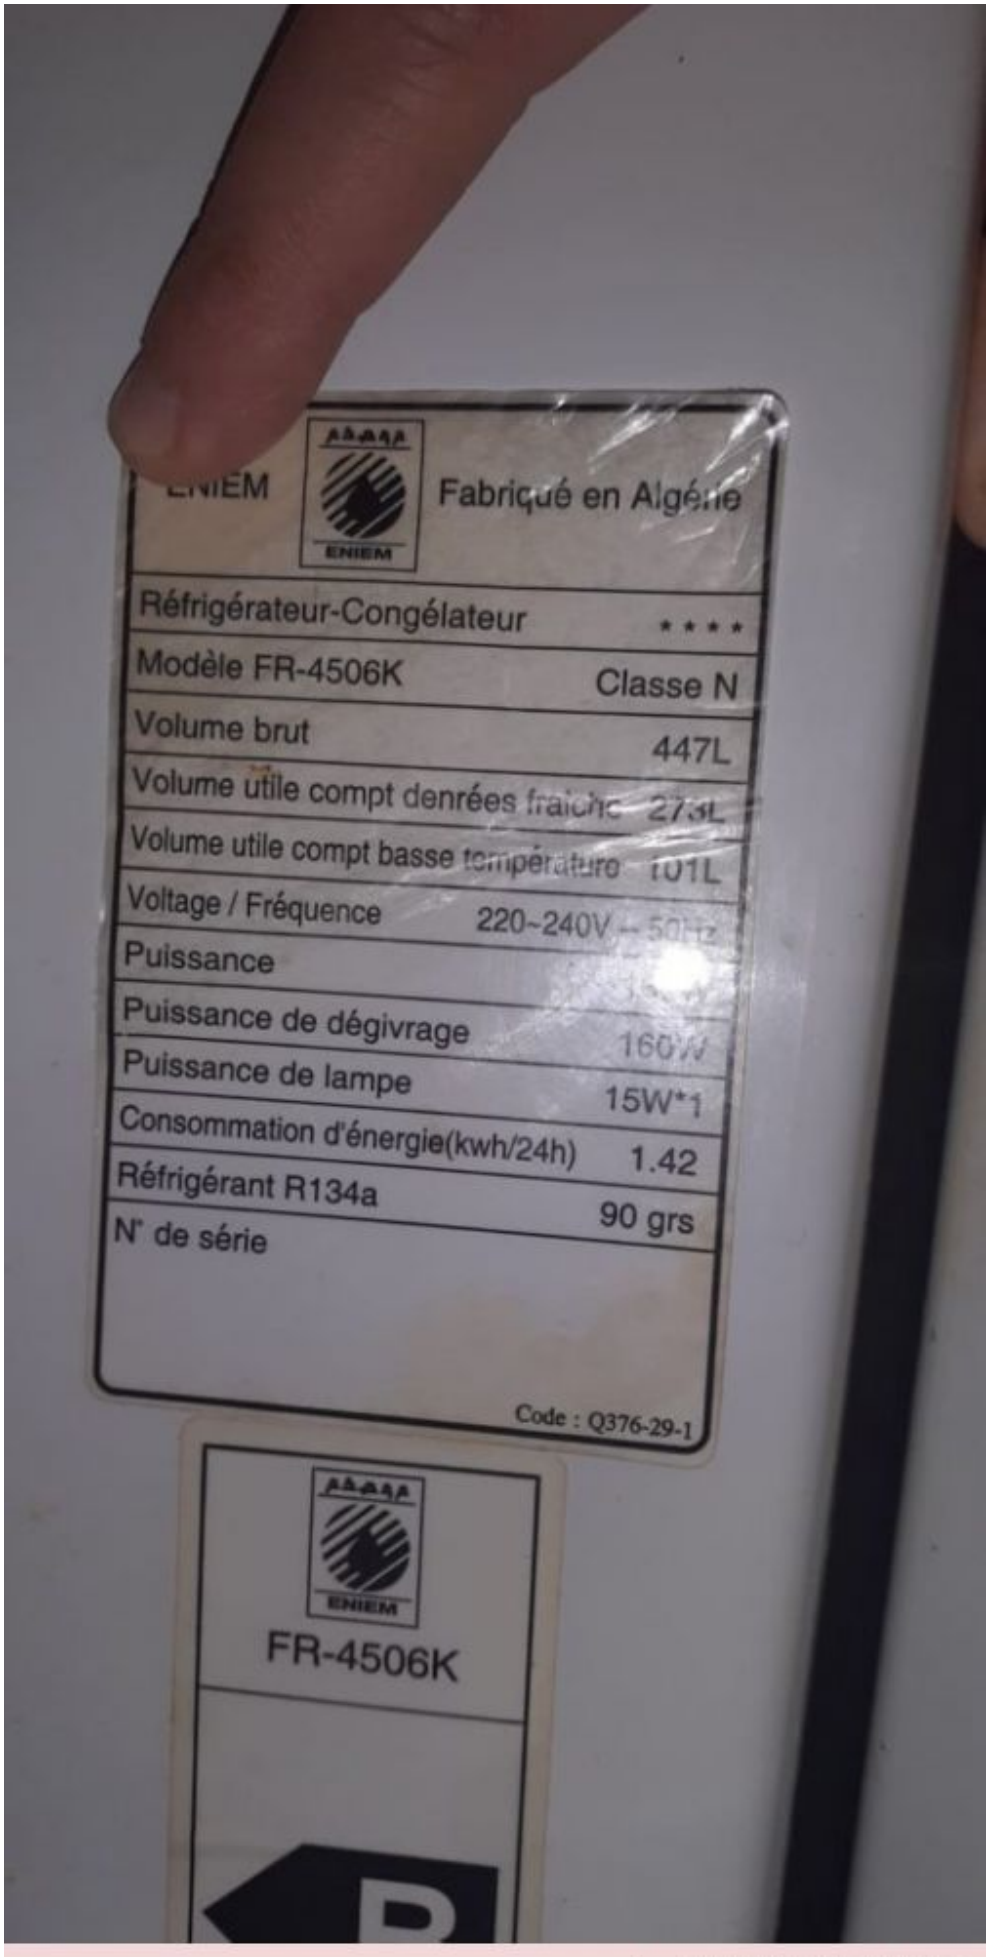

Private Picture Copyright : WWW.MBSM.PRO

Picture Copyright : WWW.MBSM.PRO

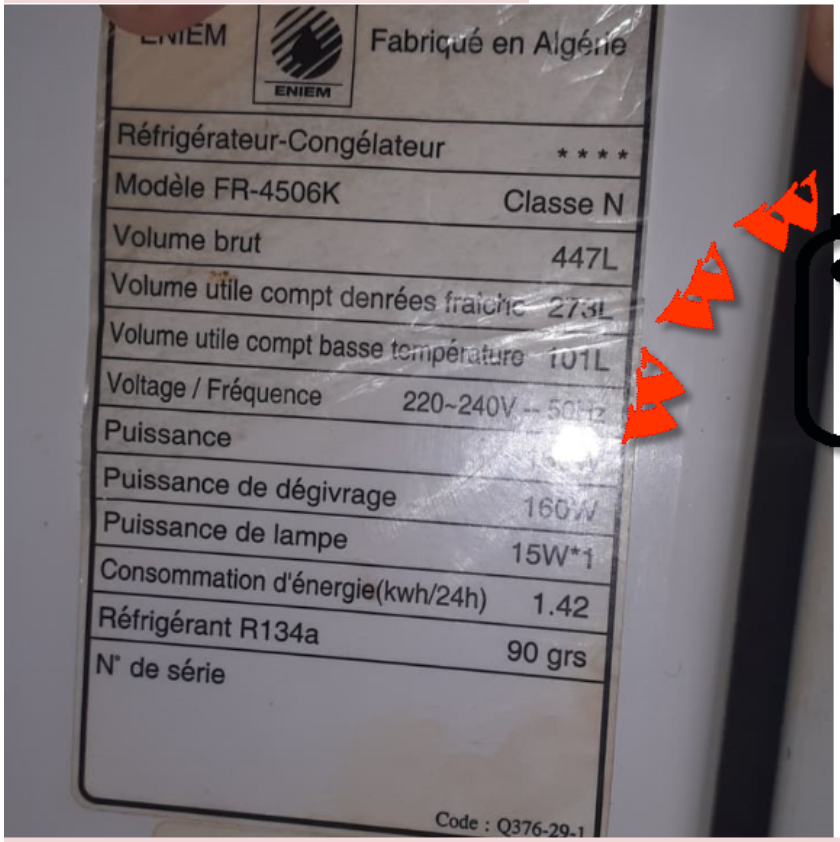

WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

1. OUTLINE

DIVISION		CONTENTS
MODEL NAME		FR4506K/N
USABLE CAPACITY(ℓ)	FREEZER	101
	REFRIGERATOR	273
	TOTAL	374
EXTERNAL DIMENSION	WIDTH	708mm
	DEPTH	706mm
	HEIGHT	1715/1759mm
REFRIGERANT	R134a	90g
COOLING & CONTROL SYSTEM	COOLING SYSTEM	Fan Cooling System
	DEFROST SYSTEM	Fin Evaporator Forced
	DEFROST CONTROL	Automatic Start & Stop
NET WEIGHT(Kg)		69kg

Private Picture Copyright : WWW.MBSM.PRO

H E L 23 YG - 3 B
① ② ③ ④ ⑤ ⑥ ⑦

NO	CONTENTS			
①	Refrigerant	H : R134a I : R600a No marking : R12		
②	Motor type	PTC	100V Series	F : RSIR E : RSCR C : CSIR B : CSR
			220V Series	S : RSIR P : RSCR K : CSIR D : CSR
		C-relay	100V Series	R : RSIR N : CSIR
			220V Series	T : RSIR G : CSIR
③	Application	L : L B P H : H B P		
④	Grade of Cooling Capacity	(reference : table of capacity range)		
⑤	Series name	JE Y YE YH YG		
⑥	Voltage & Frequency	No marking : 100V 50/60Hz 1 : 110~115V 60Hz 2 : 127V 60Hz 3 : 110V 60Hz 4 : 220V 60Hz 5 : 220~240V 50Hz 7 : 115~127V 60Hz 8 : 220~240V 50Hz / 220V 60Hz 9 : 110V 50Hz		
⑦	Improvedata order			

Private Picture Copyright : WWW.MBSM.PRO

Model	Cooling Capacity			Efficiency			Motor Type	Cooling Type	NetWeight [kg]	OilQty. [cc]
	Kcal/h	Watt	Btu/h	EFF Kcal/Wh	COP W/W	EER Btu/Wh				
HPL21YE-5-K	155	180	615	1.00	1.16	3.97	RSCR	ST/OC/FC	9	290
HPL21YE-5-L	155	180	615	1.04	1.2	4.11	RSCR	ST/OC/FC	8.9	290
HSL21YE-5	155	180	615	1.04	1.21	4.13	RSIR	ST/OC/FC	9	290
HPL23YE-5	171	199	635	1.1	1.27	4.35	RSCR	ST/OC/FC	9.5	290
HPL23YE-5-K	171	199	679	1.14	1.19	4.52	RSCR	ST/OC/FC	9	290
HSL23YE-5	171	199	679	1.06	1.16	4.21	RSIR	ST/OC/FC	9.3	290
HGH23YE-5	581	676	2306	1.94	2.25	7.69	CSIR	OC/FC	9.3	290
HKL25YE-5	180	209	714	0.97	1.19	3.84	CSIR	ST/OC/FC	9.5	290
HPL25YE-5-K	180	209	714	1.22	1.29	4.86	RSCR	ST/OC/FC	9	290
HPL25YE-5-L	180	209	714	1.07	1.31	4.23	RSCR	ST/OC/FC	9	290
HGH25YE-5	631	734	2504	1.88	2.19	7.47	CSIR	OC/FC	9.5	290
HKL27YE-5	210	244	833	1.01	1.17	4.27	CSIR	ST/OC/FC	9.5	290
HPL27YE-5	210	244	833	1.01	1.31	4.63	RSCR	ST/OC/FC	9.5	290
HPL27YE-5-K	210	244	833	1.01	1.2	4.90	RSCR	ST/OC/FC	9	290
HSL27YE-5	210	244	833	1.01	1.2	4.32	RSIR	ST/OC/FC	9.5	290
HSL27YE-5A	210	244	833	1.01	1.22	4.32	RSIR	ST/OC/FC	9.5	290
HKH27YE-5	732	851	2817	1.92	2.23	7.61	CSIR	OC/FC	9.5	290
HSH27YE-5	732	851	2817	1.88	2.19	7.47	RSIR	OC/FC	9.5	290
HKL30YE-5	230	267	913	1.01	1.1	3.61	CSIR	ST/OC/FC	9.5	290
HPL30YE-5-K	230	267	913	1.01	1.28	4.75	RSCR	ST/OC/FC	9	290
HSL30YE-5	230	267	913	1.01	1.05	3.61	RSIR	ST/OC/FC	9.5	290
HSH30YE-5	780	907	3095	1.01	2.13	6.57	RSIR	OC/FC	9.5	290
HKL30YE-5	230	267	913	1.01	1.1	3.61	CSIR	ST/OC/FC	9.5	290
HPL30YE-5-K	230	267	913	1.01	1.28	4.41	RSCR	ST/OC/FC	9	290
HSL30YE-5	230	267	913	1.01	1.05	3.61	RSIR	ST/OC/FC	9.5	290

Private Picture Copyright : WWW.MBSM.PRO

2. ELECTRIC PARTS

1) COMPRESSOR

REFRIGERANT	R-12						
VOLTAGE(V/Hz)	110/60	115,120/60	127/60	220/60	220/50	230/50	240/50
COMP MODEL	X	X	CL23YE-2	PL21YE-4	SL27YE-5		
PART CODE	X	X	3957123A20	3956121A40	3954127A50		
STARTING TYPE	X	X	CSIR	RSCR	RSIR		

REFRIGERANT	R-134a						
VOLTAGE(V/Hz)	110/60	115,120/60	127/60	220/60	220/50	230/50	240/50
COMP MODEL	HEL18YH-1	<	HEL21YH-1	X	HPL23YH-5	<	<-
PART CODE	3953118S10	<-	3953121S10	X	3956123S50	<-	<-
STARTING TYPE	RSCR	<-	RSCR	X	RSCR	<-	<-

2) RELAY

REFRIGERANT		R-12						
VOLTAGE(V/Hz)		110/60	115,120/60	127/60	220/60	220/50	230/50	240/50
ASSY	TYPE NAME	X	X	414THBYY-52	197SHBYY-52	232THBYY-52	<-	<-
	PART CODE	X	X	3018120700	3018118130	3018119970	<-	<-
PTC	RESISTANCE	X	X	S068	S330	S220	<-	<-
OVER LOAD	PART NAME	X	X	414THB	197SHB	232THB	<-	<-

WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_HPL23YH-5Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-2Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-3Télécharger