

# Mbsm.pro, Compressor, ELECTROLUX, 3/4 Hp ++ (big), R-12, S26TY, HMBP

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Commercial R12 – Medium Suction Temperature

Capacity range (watts)	Aspera	Kirby	Old Kirby Model	Danfoss	L'Unite Hermetique	Unidad Electrolux	Kelvinator	Necchi	Bulkon
201-250		AE6LMY	AE67ZD7 AE6LMA	TL4B		L57PX	S88ND	M4J	
250-300								M5J	
301-350	A5144A	AE8MG	AE59ZF9 AE8LMA						
351-400		AE9MHY	AE4425A AE9MHA	FR6B	CAE59ZF9	L76PX		M7J	
401-450	A5160A			FR7.5B		L68TY	S54FD		
450-500	A6170A	AEV9LMY	AE7416A AE10LMA	FR8.5B	CAE41ZF11	L88TX	S44ND	M9J	
501-550							S54FD S44CFD	M11, A9	
551-600	T6185A	AE12LMY	AE12LJ	FR10B	CAE4440A	P12TY	S33FD S33TF		
601-650	E6187A			FR11B SC10B					
651-700		AE14LMY	AE7423A AE14LMA			P14TY			KB14B1
701-800	T6213A			SC12B	CAJ4452A			A13	
801-900		AE16LMY	AE16LMA AE16LJ	SC15B				N17	KB19B1
901-1000		AJ18MY	AJ7428A						KB19B1
1001-1200	T6215A	AJ22LMY	AJ7434A AJ22LJ	SC18B	CAJ4461A	S18TY	S5050FDH		KB23B1
1201-1400	J6220A	AJ26LMY	AJ7445A AJ26LJ	SC21B		S26TY	S7575FDH		KB26B1
1401-2000	J6226A	AJ34LMY	AJ7457A AJ34LJ		CAJ4511A	S34TY	S1010FDH		KB37B1
2001-2500	H6238A	AH49MHY	AH4514A		CAH4518A TAH4518A				
2501-3500	H6253A	AH74MHY	AH4521A		CAH4524A TAH4524A				



HMBP															
R12 50 Hz			CECOMAF (W)						ASHRAE		R12 50 Hz				
			-25	-15	5		10	7.2							
					W	COP		kcal/h	COP						
<b>220-240V 50Hz ~I</b>															
L45PX	1/6	F	4.50	77	131	325	1.68	391	330	1.91	C	300	8.4	RSIR	R
L57PX	1/5	F	5.67	97	171	422	1.84	505	427	2.10	C	300	9.5	RSIR	R
L76TX	1/5	F	7.57	131	223	545	1.84	654	553	2.07	C-V	300	9.5	CSIR	R
L88TY	1/4	F	8.85	165	276	646	1.87	768	652	2.11	C-V	300	10.0	CSIR	R
P12TY	3/8	F	12.00	209	356	871	1.82	1044	882	2.05	C-V	400	11.2	CSIR	R
P14TY	3/8	F	14.00	242	412	985	1.73	1176	996	1.96	C-V	400	11.5	CSIR	R
R18TY	1/2	F	18.10	277	533	1328	2.02	1586	1343	2.30	C-V	640	19.9	CSIR	R
X18TY	1/2	F	18.40	322	544	1323	1.95	1587	1340	2.20	C-V	500	16.1	CSIR	R
S26TY	3/4	F	25.93	391	770	1933	2.01	2307	1955	2.29	C-V	887	22.7	CSIR	R
S34TY	1	F	34.42	643	1171	2752	2.31	3255	2771	2.60	C-V	887	22.7	CSR	R
<b>200-220/230V 50/60Hz ~I</b>															
L45PX	1/6	F	4.50	77	131	325	1.59	391	330	1.79	C	300	8.4	RSIR	R
L57PX	1/5	F	5.67	97	173	389	1.75	456	390	1.96	C	300	9.5	RSIR	R
S18TY	1/2	F	18.10	277	533	1329	1.99	1586	1344	2.26	C-V	887	21.8	CSIR	R
X18TY	1/2	F	18.40	322	544	1323	1.93	1587	1340	2.18	C-V	500	16.1	CSIR	R
S26TY	3/4	F	25.93	391	770	1933	2.00	2307	1954	2.27	C-V	887	22.7	CSIR	R
S34TY	1	F	34.42	643	1171	2752	2.27	3255	2770	2.58	C-V	887	22.7	CSR	R

Private Picture Copyright : WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_S26TYTélécharger

# Mbsm.pro, book, catalog compressor ZEL pdf

Category: compressor,Files

written by www.mbsm.pro | 2 January 2022



Private Picture Copyright : WWW.MBSM.PRO



Copyright: WWW.MBSM.PRO

		cc	hp		hz	w	w	w	w/w	w/w	µF	mm	kg
<b>220-240V/50Hz</b>													
<b>普效系列 Standard Efficiency Range</b>													
HML140A	Al	8.0	1/8	RSIR/RSCR	50	140	96	90	1.46	1.56	3	152	6.3
<b>中效系列 Medium Efficiency Range</b>													
HDL100A	Al	5.7	1/10	RSIR/RSCR	50	98	65	60	1.50	1.64	2.5	161	6.9
HDL125A	Al	7.0	1/10	RSIR/RSCR	50	125	77	71	1.62	1.75	2.5	164	7.2
HDL140A	Al	8.0	1/8	RSIR/RSCR	50	140	86	80	1.63	1.76	2.5	164	7.2
<b>高效系列 High Efficiency Range</b>													
HXL100A	Cu	5.7	1/15	RSCR	50	98		52		1.88	2	161	7.3
HXL125A	Cu	7.0	1/10	RSCR	50	125		65		1.91	2	161	7.3
HXL140A	Cu	8.0	1/10	RSCR	50	140		73		1.91	2	161	7.3
HXL170A*	Cu	9.3	1/8	RSCR	50	170		89		1.91	2	161	7.3
<b>超高效系列 Top Efficiency Range</b>													
HPL100A*	Cu	5.7	1/14	CSCR	50	100		50		2.00	2	161	7.3
HPL125A*	Cu	7.0	1/12	CSCR	50	125		63		2.00	2	161	7.3
HPL140A*	Cu	8.0	1/10	CSCR	50	140		70		2.00	2	161	7.3
<b>220-240V/60Hz</b>													

Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_catalogo-compresores-ZEL-pdf-2Télécharger

Mbsm.pro, COMPRESSOR, ZEL, Zanussi, refrigerator, CUBIGEL/ ACC , HML140A, HDL140A, LBP, R600A, 220-240V, 1/8hp, 140w

Category: compressor

written by www.mbsm.pro | 2 January 2022



北京西电气机械天津压缩机有限公司  
中国天津港保税区(空港保税B区)1号  
电话 +86 22 84881086  
传真 +86 22 84881087  
邮箱 mbsm@mbp.com

ZANUSSI ELETTROMECCANICA COMPRESSOR TIANJIN CO.,LTD  
ADDRESS: 16E-3 BAOJING ROAD, TIANJIN FREE TRADE ZONE  
HAIFUO INDUSTRIAL PARK, TIANJIN CITY, CHINA  
ZIP CODE: 300308  
PHONE: +86 22 84881086  
FAX: +86 22 84881087

# GENERAL CATALOGUE ZEL ACC COMPRESSORS

R600a - R134a  
All solutions inside.



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, COMPRESSOR, ZEL, Zanussi, refrigerator, CUBIGEL/ ACC , HML140A, HDL140A, LBP, R600A, 220-240V, 1 /8hp, 140w

Mbsm.pro, Compressor, ACC, Cubigel, Huayi, Electrolux, ZEM, MPT14LA , MPT14RA, LBP , R404A, R507, 1/2HP, 220-240V

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor Tecumseh L` Unite CAJ2432Z, LBP – R404A, 220 – 240V, 50 Hz, 1 phase, discharge: 18.3 cm<sup>3</sup>, oil type: POE, oil charge: 887 cm<sup>3</sup>, electrical equipment: CSR, cooling power 381 W at -35 / +40 °C, connection: suction: 1/2 inch, discharge: 5/16 inch, sound level: 56 dBA, start capacitor: 8 8 uF/250V, run capacitor: 15 uF/400V, expansion device: capillary or expansion valve, height: 271 mm, weight: 21.5kg

Type: Low back pressure (LBP)

Refrigerant: R404a/507

Displacement: 14.32cm<sup>3</sup>

Power: 1/2CV

Voltage: 230V – 50Hz

Single-phase

Motor type: CSR

Weight: 13.4 kg

Evaporation temperature

-40°C: 243W


-30°C: 420W

-25°C: 535W

-10°C: 988W



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

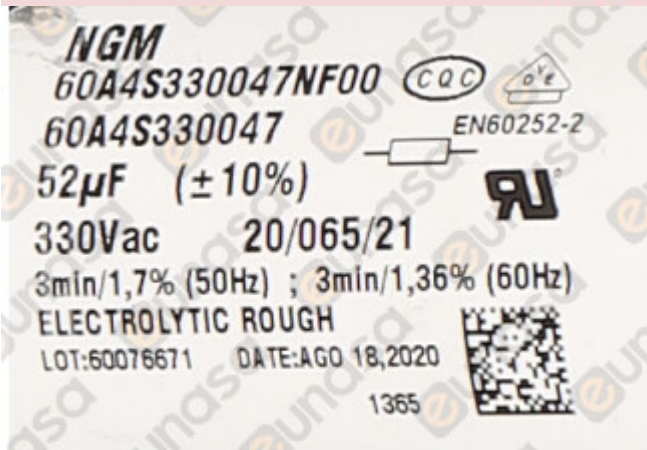

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_MPT14LATélécharger

---

Mbsm.pro, COPLAND, Compressor,  
KCJ511HAE, KCJ511HAE-BXXX , HBP,  
1-3/8 hp big ++, R-22 , 230 V, 50 Hz,  
1PH , FAN, 350 ft3 / m

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

### Technical Specification

Cooling Capacity (Btu/hr) 11275

Cooling Capacity (w) 3302

HP 1-3/8

LRA 54

#### COMPRESSOR MECHANICAL AND PHYSICAL DATA

Number of cylinders 2

Displacement @ 50 Hz, cu.m/h 3.2

Bore/Stroke, mm 3.5/1.9

Length/Width, mm 235/179

Height, mm 264

Net Weight, kg 21.5

Stub Suction, inch 5/16

Stub Discharge, inch 5/16

Oil Quantity, l 0.9

Base mounting (hole dia), mm NA (0.0)

Sound Pressure @ 1m (HT), dBA 57  
Sound Power (HT), dBA 68  
COMPRESSOR ELECTRICAL DATA (220/240V – 1~ – 50Hz)  
Locked Rotor Current, A 25  
Default Enclosure Class IP 21 (IEC 34)  
ACCESSORIES OPTIONAL  
Mounting Grommets Standard  
Single Phase Equipment Relay, Start and Run Capacitor



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Horse Power  
50HZ  
Brand  
COPLAND  
Compressor Technology

HERMETIC  
Model Name/Number  
KCJ511HAE  
Power  
220V



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_KCJ511HAETélécharger  
Mbsm\_dot\_pro\_private\_PDF\_KCJ511HAE-1Télécharger

---

## Saunier Duval C25E


Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022





Private Picture Copyright: WWW.MBSM.PRO

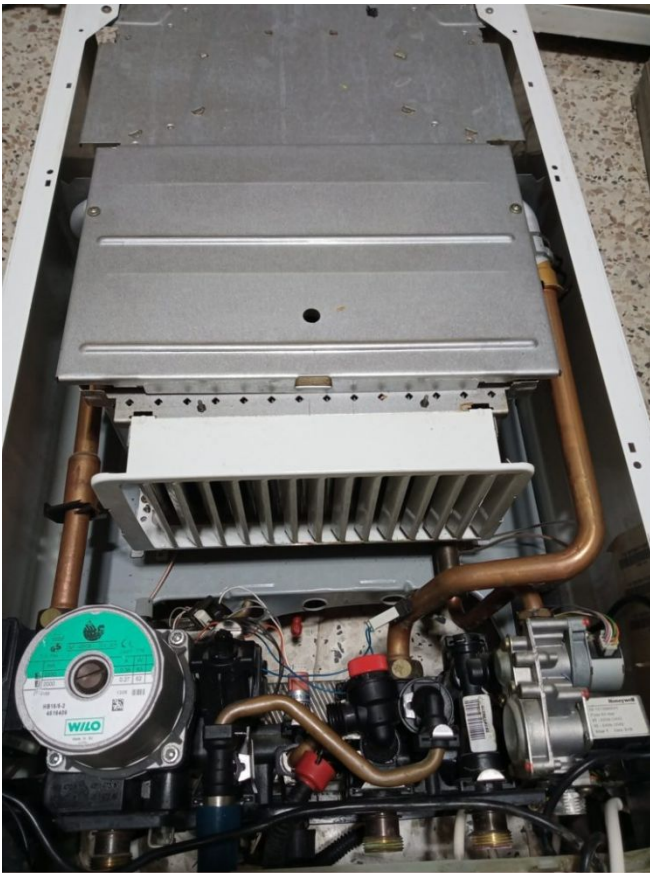

Private Picture Copyright: WWW.MBSM.PRO

# Thermostat d'ambiance ,Thermostat de sécurité,Marque IMIT,Italie

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022

















Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)






Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

SCHNEIDER N:ATV32H075M2 variable  
speed drive ATV32 – 0,75 kw – 200 V –  
1 phase – with heat sink

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022



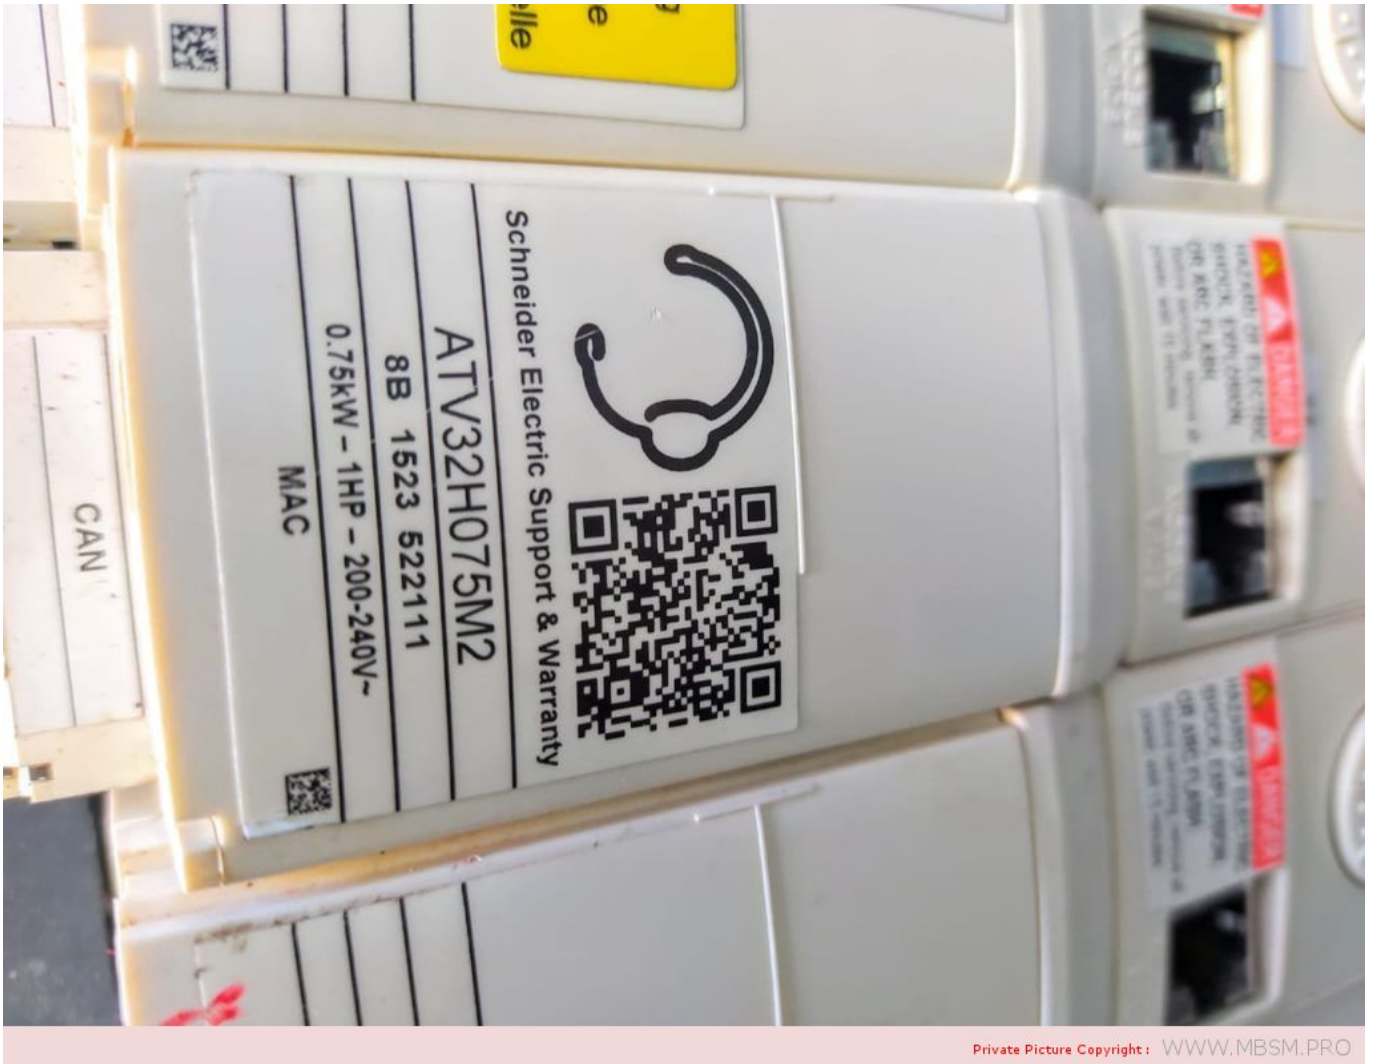



# SINUMERIC

موزع لمنذانية Schneider

**Christ**  
WASH SYSTEMS  
Firmware V1.5 IE14



**⚠ DANGER**

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH. Before servicing, remove all power and 15 minutes.



**⚡**  
AC/DC  
Nominal voltage  
ATV32HU15N4  
Nominal voltage  
ATV32HU15N4  
Nominal voltage



Schneider Electric Support & Warranty

ATV32HU15N4

SN 1542 614147

1.844 - 237 - 262-8221

MAC

0102 080 1007

Sinumeric\_ias@hotmail.com

مشروع الاستعماري - محل رقم 3



# SINUMERIC

موزع لمنذانية Schneider

S

0102 080 1007

Sinumeric\_ias@hotmail.com

مشروع الاستعماري - محل رقم 3

العائش من رمضان



# PINCE EMBOITURE VIRAX 12-32MM SERTISSAGE AXIAL PER-PEX 12-16MM

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 2 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)









 **virax**

252641 Ø 12-14-16-18-22 MM  
 252644 Ø 12-14-16-18-22-28-32 MM  
 252679 Ø 12-15-18-22-28 MM  
 252637 Ø ¼-⅝-¾-⅞  
 252651 Ø ¼-⅝-¾-⅞-1 ¼"  
 252681 Ø ¼-⅝-¾-⅞-1 ¼"

**Cu**

 **virax**





Private Picture Copyright: WWW.MBSM.PRO

## Machine a laver lg 11kg

Category: Pictures

written by www.mbsm.pro | 2 January 2022



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)