

The ECQ VP115 Vacuum Pump

Category: Equipment

written by www.mbsm.pro | 2 January 2026



Private Picture Copyright : WWW.MBSM.PRO

The ECQ Vacuum Pump VP115 is the ideal tool for the artisan bricoleur. With 2 CFM displacement and a durable 1/4 HP motor, it perfectly balances portability and power for residential AC and fridge repairs. This guide covers specifications, maintenance, and why 100% copper winding matters for your daily work.

Toshiba GR-EF37 No-Frost Refrigerator

Category: Equipment

written by www.mbsm.pro | 2 January 2026




Private Picture Copyright : WWW.MBSM.PRO

“Toshiba GR-EF37 350 liter no-frost refrigerator with platinum deodorizer, A-class energy efficiency, R600a refrigerant, 10-year warranty, dual cooling zones”


220V AC to 12V DC Bridge Rectifier Circuit

Category: Electronic

written by www.mbsm.pro | 2 January 2026

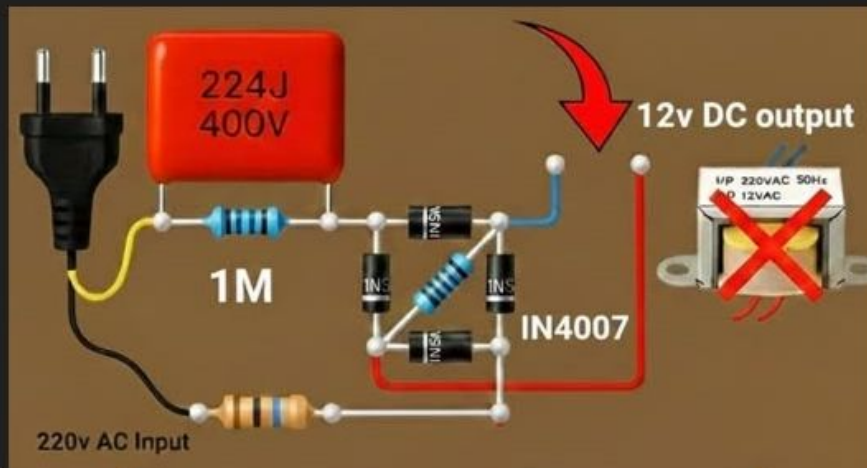

220v AC to 12v DC Circuit

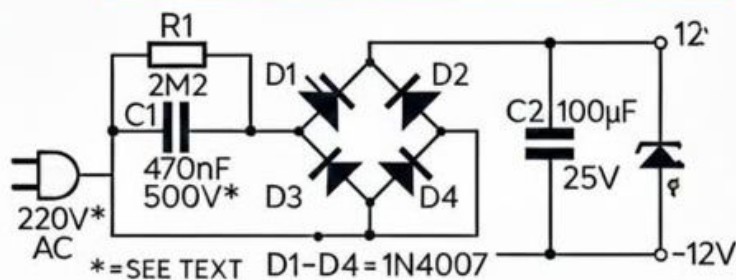

Private Picture Copyright : WWW.MBSM.PRO

The bridge rectifier circuit represents the most efficient topology for converting 220V AC mains voltage to stable 12V DC output using four 1N4007 diodes in diamond configuration. This comprehensive guide explores circuit design, capacitor filter selection, voltage calculations, diode specifications, troubleshooting methods, and safety considerations for reliable power supply implementation across industrial and consumer applications worldwide

White Whale WR-5395 HBX, 540L

Category: Refrigeration

written by www.mbsm.pro | 2 January 2026



Private Picture Copyright : WWW.MBSM.PRO

The White Whale 540-liter black refrigerator is a large-capacity top-mount model designed for families who need generous storage and efficient cooling in a stylish body. It combines No Frost technology, inverter motor, digital display, and an integrated water dispenser, making it an attractive choice for modern kitchens that prioritise performance and design.

Ariston AB 636 T EX

Category: Equipment

written by www.mbsm.pro | 2 January 2026



Private Picture Copyright : WWW.MBSM.PRO

Ariston AB 636 T EX washing machine rating plate identification and technical specifications for repair technicians

ZMC GL80AF R134a Hermetic Compressor

Category: Refrigeration

written by www.mbsm.pro | 2 January 2026

LBP															
R134a 60 Hz				CECOMAF (W)						ASHRAE		R134a 60 Hz			
				-35	-30	-25		-10	-23.3						
						W	COP		kcal/h	COP					
200-220/220-230V 50/60Hz ~I															
GD30AG	1/12	S	3.08	25	39	57	0.67	130	68	0.88	C	200	5.8	RSIR	P
GD40AF	1/10	S	4.03	35	54	77	0.70	171	91	0.91	C	200	6.8	RSIR	P
GL99BL	1/4	OC	9.93	102	148	204	0.93	434	239	1.21	C	470	11.3	RSCR	P
GL45AF	1/8	S	4.55	41	64	94	0.76	214	111	0.99	C	270	9.0	RSIR	P
GL60AF	1/6	S	5.99	66	94	131	0.81	286	154	1.05	C	270	9.1	RSIR	P
GL70AF	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANa	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANb	1/5	OC	6.65	80	110	150	0.90	323	175	1.17	C	445	10.4	RSIR	P
GL80AF	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANa	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANb	1/5	OC	8.10	87	123	172	0.92	384	202	1.19	C	445	10.7	RSIR	P
GL90AF	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANa	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANb	1/4	OC	9.08	96	134	185	0.93	420	218	1.20	C	445	10.9	RSIR	P
115V 60Hz ~I															
GD24AD	1/20	S	2.42	14	25	40	0.52	99	48	0.70	C	200	5.1	RSIR	P
GD36AD	1/12	S	3.62	30	47	68	0.65	149	80	0.85	C	240	6.1	RSIR	P
GL45ADa	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C	265	8.1	RSIR	P
GL45ADb	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C-V	265	8.1	CSIR	R
GL60ADa	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	265	9.1	RSIR	P
GL60ADb	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	210	9.1	CSIR	R
GL60BK	1/6	OC	5.99	66	95	132	0.84	290	155	1.10	C	400	10.0	RSCR	P
GL70ADa	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	RSIR	P
GL70ADb	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	CSIR	R
GL80ADa	1/5	S	8.10	84	121	171	0.87	383	201	1.13	C	345	9.8	RSIR	P
GL80ADb	1/5	S	8.10	84	122	171	0.87	384	201	1.13	C-V	345	9.8	CSIR	R
GL80BK	1/5	OC	8.10	79	119	169	0.85	381	200	1.11	C	470	11.1	RSCR	P
GL90ADa	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	RSIR	P
GL90ADb	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	CSIR	R



PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

ZMC GL80AF R134a 1/5 HP hermetic refrigerator compressor technical data and applications Mbsmgroup Mbsm.pro mbsmpro.com mbsm.

Compressor database chart Relay 01p

Category: Equipment

written by www.mbsm.pro | 2 January 2026



Model	Connect current(A)	Release current(A)	Overload current(A)	Applied Temperature $^{\circ}$ C	Connect temperatur $^{\circ}$ C
117 μ 2010	2	1.6	4	105 \pm 10	60 \pm 10
117 μ 2030	3	2.6	5		
117 μ 2040	4	3.6	6.5		
117 μ 2050	4.6	4.2	6.5		

Private Picture Copyright : WWW.MBSM.PRO

A refrigerator compressor does not run alone; it depends on a start relay and an overload protector (OLP) to start safely and avoid burning out. The wiring diagram of compressor, relay, and OLP shows how power flows from the thermostat, through protection devices, to the motor windings, keeping domestic fridges reliable and safe.

Tecumseh CAJ9480T R22 Hermetic Compressor: Complete Technical Guide for Professionals

Category: Refrigeration

written by www.mbsm.pro | 2 January 2026



Private Picture Copyright : WWW.MBSM.PRO

The Tecumseh / L'Unité Hermetique CAJ9480T is a 5/8 HP hermetic compressor delivering about 1 968 W of cooling capacity for R22 commercial refrigeration systems. It is widely used in small cold rooms, display cabinets and compact condensing units. This Mbsmgroup guide explains its main specifications, applications, installation tips and key technical PDFs.

Zener Diode Series 1N746 to 1N5369 Overview

Category: Electronic

written by www.mbsm.pro | 2 January 2026

0,5W	1W	5W
1N746 – 3V3	1N4728 – 3V3	1N5333 – 3V3
1N747 – 3V6	1N4729 – 3V6	1N5334 – 3V6
1N748 – 3V9	1N4730 – 3V9	1N5335 – 3V9
1N749 – 4V3	1N4731 – 4V3	1N5336 – 4V3
1N750 – 4V7	1N4732 – 4V7	1N5337 – 4V7
1N751 – 5V1	1N4733 – 5V1	1N5338 – 5V1
1N752 – 5V6	1N4734 – 5V6	1N5339 – 5V6
1N753 – 6V2	1N4735 – 6V2	1N5340 – 6V0
1N754 – 6V8	1N4736 – 6V8	1N5341 – 6V2
1N755 – 7V5	1N4737 – 7V5	1N5342 – 6V8
1N756 – 8V2	1N4738 – 8V2	1N5343 – 7V5
1N757 – 9V1	1N4739 – 9V1	1N5344 – 8V2
1N758 – 10V	1N4740 – 10V	1N5345 – 8V7
1N962 – 11V	1N4741 – 11V	1N5346 – 9V1
1N759 – 12V	1N4742 – 12V	1N5347 – 10V
1N964 – 13V	1N4743 – 13V	1N5348 – 11v
1N965 – 15V	1N4744 – 15V	1N5349 – 12v
1N966 – 16V	1N4745 – 16V	1N5350 – 13v
1N967 – 18V	1N4746 – 18V	1N5351 – 14V
1N968 – 20V	1N4747 – 20V	1N5352 – 15V
1N969 – 22V	1N4748 – 22V	1N5353 – 16V
1N970 – 24V	1N4749 – 24V	1N5354 – 17V
1N971 – 27V	1N4750 – 27V	1N5355 – 18V
1N972 – 30V	1N4751 – 30V	1N5356 – 19V
1N973 – 33V	1N4752 – 33V	1N5357 – 20V
1N974 – 36V	1N4753 – 36V	1N5358 – 22V
1N975 – 39V	1N4754 – 39V	1N5359 – 24V
1N976 – 43V	1N4755 – 43V	1N5360 – 25V
1N977 – 47V	1N4756 – 47V	1N5361 – 27V
1N978 – 51V	1N4757 – 51V	1N5362 – 28V
1N979 – 56V	1N4758 – 56V	1N5363 – 30V
1N980 – 62V	1N4759 – 62V	1N5364 – 33V
1N981 – 68V	1N4760 – 68V	1N5365 – 36V
1N982 – 75V	1N4761 – 75V	1N5366 – 39V
1N983 – 82V	1N4762 – 82V	1N5367 – 43V
1N984 – 91V	1N4763 – 91V	1N5368 – 47V
1N985 – 100V	1N4764 – 100V	1N5369 – 51V

Private Picture Copyright : WWW.MBSM.PRO

Zener diodes are essential components in voltage regulation and protection circuits. This guide provides a detailed overview of three popular power ratings: 0.5W, 1W, and 5W Zener diode series, covering part numbers from 1N746 to 1N5369 and voltage ranges from 3.3V to 100V. Whether you're designing a power supply, voltage reference, or surge protection circuit, having a complete voltage chart at your fingertips is invaluable for selecting the right

component.

Mbsm,pro, air conditioner, Condor, CsHR09-gcm1t1(0), 9000 btu, 4.5 A, r22, 750 G, T1

Category: air conditioner

written by www.mbsm.pro | 2 January 2026

Condor مكيف هوائي منفصل - وحدة خارجية
Climatiseur Split-unité extérieure

Modèle	CSHR09-GCM1T1(0)		النوع
Voltage	220-240V~	جهد التيار	9000BTU/h
Fréquence	50Hz	التردد	9800BTU/h
Type du climat	T1	نوع المناخ	Puissance Electr. au refroidiss.
Poids	25kg	الوزن	الطاقة الكهربائية للتبريد
Isolation	I	العزل	925W
Réfrigérant	R22	سائل التبريد	Puissance Electr. au chauffage
Charge réfri.	0.70kg	الكمية	الطاقة الكهربائية للتدفئة
Comp. LRA	21A	للضغوط	Puissance nominal refroid.
Degré de protection	IP24	درجة الحماية	الطاقة القصوى للتبريد
Nuisance	50dB(A)	معييار الضوضاء	Puissance nominal chauff.
			الطاقة القصوى للتدفئة
Pression de fonctionnement max admissible coté refoulement	2.5MPa	ضغط الطرد الأقصى	
Pression de fonctionnement max admissible coté aspiration	0.6MPa	ضغط السحب الأقصى	

Fabriqué en Algérie
صنع في الجزائر

6 130839 002570
63229966728

Private Picture Copyright : WWW.MBSM.PRO

Mbsm,pro, air conditioner, Condor, CsHR09-gcm1t1(0), 9000 btu, 4.5 A, r22, 750 G, T1