

SCHNEIDER N:ATV32H075M2 variable speed drive ATV32 – 0,75 kw – 200 V – 1 phase – with heat sink

Category: Pictures

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO





SINUMERIC

موزع لمنذانية Schneider

Christ
WASH SYSTEMS
Firmware V1.5 IE14



⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH. Before servicing, remove all power and 15 minutes.



⚡
AC/DC
Nominal voltage
ATV32HU15N4
Nominal voltage
ATV32HU15N4
Nominal voltage



Schneider Electric Support & Warranty

ATV32HU15N4

SN 1542 614147

1.844 - 237 - 262-8821

MAC

0102 080 1007

Sinumeric_ias@hotmail.com

مشروع الاستعماري - محل رقم 8



SINUMERIC

موزع لمنذانية Schneider

S

0102 080 1007

Sinumeric_ias@hotmail.com

مشروع الاستعماري - محل رقم 8

العائش من رمضان



PINCE EMBOITURE VIRAX 12-32MM SERTISSAGE AXIAL PER-PEX 12-16MM

Category: Pictures

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright : WWW.MBSM.PRO





 **virax**



AXIAL CRIMPING
SERTISSAGE AXIAL
PER / PEX
Ø 12-16-20mm



CHRONO 99765





virax

<input type="checkbox"/>	252641	∅ 12-14-16-18-22 MM
<input checked="" type="checkbox"/>	252644	∅ 12-14-16-18-22-28-32 MM
<input type="checkbox"/>	252679	∅ 12-15-18-22-28 MM
<input type="checkbox"/>	252637	∅ 1/8-3/8-1/2-5/8"
<input type="checkbox"/>	252651	∅ 1/8-3/8-1/2-5/8-1 1/8"
<input type="checkbox"/>	252681	∅ 1/8-3/8-1/2-5/8-1 1/8"

Cu



 **virax**




Private Picture Copyright: WWW.MBSM.PRO

Machine a laver lg 11kg

Category: Pictures

written by www.mbsm.pro | 29 December 2021

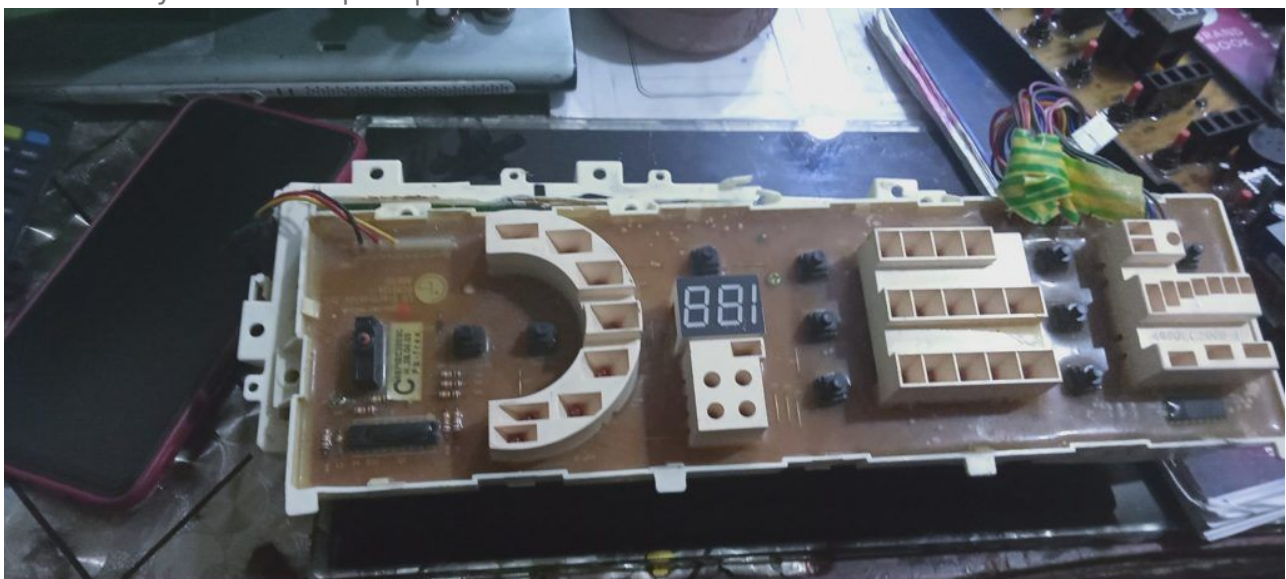

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

BONNAMY AUTOMATIC TUBE BENDER

Category: Pictures

written by www.mbsm.pro | 29 December 2021













Private Picture Copyright: WWW.MBSM.PRO



White whale look machine a laver

Category: Pictures

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, JIAXIPERA,
ND1080Y, 1/8HP, ND1090Y, 1/8+HP,
ND1110Y, 1/7HP, ND1111Y, 1/6-HP,
ND1112Y, 1/6+HP, NX1080Y, 1/8HP,
NX1090Y, 1/8+HP, NX1110Y, 1/7HP,
NX1111Y, 1/6HP, NX1112Y, 1/6+HP,
NX1113Y, 1/5HP, NX1114Y, 1/5+HP,
NX1116Y, 1/4HP, NX1117Y, 1/4HP,
NX1119Y, 1/4+HP, NX1120Y, 1/4+HP,
TB1080Y, 1/8HP, TB1090Y, 1/8+HP,
TB1110Y, 1/7HP, TB1111Y, 1/6HP,

TB1112Y, 1/6+HP, TB1113Y, 1/5HP,
TB1114Y, 1/5+HP, TX1080Y, 1/8HP,
TX1090Y, 1/8+HP, TX1110Y, 1/7HP,
TX1111Y, 1/6HP, TX1112Y, 1/6+HP,
TX1113Y, 1/5HP, TX1114Y, 1/5+HP,
VNX1111Y, 1/6HP, VNX1113Y, 1/5HP,
VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP,
ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP

Category: compressor

written by www.mbsm.pro | 29 December 2021



Mbsm.pro, Compressor, JIAXIPERA, ND1080Y, 1/8HP, ND1090Y, 1/8+HP, ND1110Y, 1/7HP, ND1111Y, 1/6-HP, ND1112Y, 1/6+HP, NX1080Y, 1/8HP, NX1090Y, 1/8+HP, NX1110Y, 1/7HP, NX1111Y, 1/6HP, NX1112Y, 1/6+HP, NX1113Y, 1/5HP, NX1114Y, 1/5+HP, NX1116Y, 1/4HP, NX1117Y, 1/4HP, NX1119Y, 1/4+HP, NX1120Y, 1/4+HP, TB1080Y, 1/8HP, TB1090Y, 1/8+HP, TB1110Y, 1/7HP, TB1111Y, 1/6HP, TB1112Y, 1/6+HP, TB1113Y, 1/5HP, TB1114Y, 1/5+HP, TX1080Y, 1/8HP, TX1090Y, 1/8+HP, TX1110Y, 1/7HP, TX1111Y, 1/6HP, TX1112Y, 1/6+HP, TX1113Y, 1/5HP, TX1114Y, 1/5+HP, VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP



ZBX 1119 CY

1 / 4 + HP



ZBX 1121 CY

1 / 4 + HP



ZBX 1122 CY

1 / 4 + HP



TB 1080 Y

1 / 8 HP

TB 1090 Y

1 / 8 + HP

TB 1110 Y

1 / 7 HP



TB 1111 Y

1 / 6 HP



TB 1112 Y

1 / 6 + HP



TB 1113 Y

1 / 5 HP



TB 1114 Y

1 / 5 + HP



TX 1080 Y

1 / 8 HP



TX 1090 Y

1 / 8 + HP



NX 1110 Y

1 / 7 HP

NX 1111 Y

1 / 6 HP

NX 1112 Y

1 / 6 + HP



NX 1113 Y

1 / 5 HP

NX 1114 Y

1 / 5 + HP

NX 1116 Y

1 / 4 HP



NX 1117 Y

1 / 4 HP

NX 1119 Y

1 / 4 + HP

NX 1120 Y

1 / 4 + HP

MH 1110 Y

1 / 6 - HP

ND 1070 Y

1 / 9 HP

ND 1080 Y

1 / 8 HP



ND 1090 Y

1 / 8 + HP



ND 1110 Y

1 / 7 HP



ND 1111 Y

1 / 6 - HP



ND 1112 Y

1 / 6 + HP



NX 1080 Y

1 / 8 HP



NX 1090 Y

1 / 8 + HP



JK 1080 Y

1 / 8 + HP



JK 1090 FY

1 / 6 - HP



JK 1110 Y

1 / 7 HP



JK 1111 HY

1 / 6 - HP



MH 1050 Y

1 / 12 HP



MH 1090 Y

1 / 8 + HP

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Deep, freezer, congela, 383
Litre, Compressor, R134A, 215W, 1/4
Hp++, 1/3 Hp-, 215W

Category: Chaud&Froid,Freezer

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright : WWW.MBSM.PRO

□ □□□□ □□□□ , □□□□□□□□ □□ □□□□□□□□ □□□□□□□□ , □□□hp , □□□□□□
□ □□□□□ □□□□□, □□□□ □□□□□hp

<p> INPUT FREQUENCY: 60 Hz MAXIMUM VOLTAGE: 127 V RATED VOLTAGE: 115 V RATED INPUT: 215 W RATED DEFROST INPUT: 690 W RATED DEFROST CURRENT: 6.00 A RUN TIME (90°F): 65-75% TEMPERATURE DESIGN RATING: 60-70% SUPPLY TYPE: T LAMP RATING: 40 W FUSE RATING: 15 A ICE HARVEST: (24 hrs): 1.8 kg POWER USAGE: (24 hrs): 2.9 kWh STORAGE VOLUME: 683 litres </p>	<p> FRECUENCIA NOMINAL: 60 Hz TENSION MAXIMUM: 127 V TENSION NOMINALE: 115 V PUISSANCE D'ENTREE NOMINALE: 215 W PUISSANCE D'ENTREE NOMINALE DEGIVRAGE: 690 W INTENSITE NOMINALE DEGIVRAGE: 6.00 A TEMPS FONCTIONNEMENT A 32° C: 65-75% TEMPERATURE NOMINALE DE FONCTIONNEMENT: T TYPE D'ALIMENTATION: T CALIBRE LAMPES: 40 W CALIBRE FUSIBLE: 15 A GLACONS-24 H: 1.8 kg CONSUMMATION ELECTRIQUE-24 H: 2.9 kWh VOLUME RANGEMENT: 683 litres </p>	<p> FRECUENCIA NOMINAL: 60 Hz VOLTAGE MAXIMO: 127 V VOLTAGE NOMINAL: 115 V ENTRADA NOMINAL: 215 W ENTRADA NOMINAL DEL DESCONGELADOR: 690 W CORRIENTE NOMINAL PARA EL DESCONGELADOR: 6.00 A TIEMPO DE FUNCIONAMIENTO (a 32° C): 65-75% CLASIFICACION DE LA TEMPERATURA: T TIPO DE SUMINISTRO: T TIPO DE BOMBILLA: 40 W PRODUCCION DE HIELO (24 horas): 1.8 kg CONSUMO DE CORRIENTE (24 horas): 2.9 kWh CAPACIDAD DE ALMACENAMIENTO: 683 litros </p>
---	--	---

Made in U.S.A.

Made in U.S.A.

Made in U.S.A.

Made in U.S.A.





Private Picture Copyright : WWW.MBSM.PRO

DOMESTIC SINGLE DOOR FRIDGE				
4 to 5	Cubic Feet	(113-160 Ltr)	=	1\12 H.P.
6 to 7	Cubic Feet	(170 -198 Ltr)	=	1\10 H.P.
8 to 9	Cubic Feet	(226-254 Ltr)	=	1\8 H.P.
9 to 13	Cubic Feet	(283 - 370 Ltr)	=	1\6 H.P.
DOMESTIC DOUBLE DOOR FRIDGE				
9 to 12	Cubic Feet	(226-340 Ltr)	=	1\5 H.P.
13 to 17	Cubic Feet	(370-481 Ltr)	=	1\4 H.P.
17 to 22	Cubic Feet	(509-623Ltr)	=	1\3 H.P.

Private Picture : www.MBSMGROUP.TN


Private Picture Copyright : WWW.MBSM.PRO

جدول قدرة المضخات بالنسبة لحجم الثلاجة أو الديب فريزر

المضخات بالحجم		1/12	1/10	1/8	1/6	1/5	1/4	1/3	1/2
الثلاجة	قدم	4	6	8	10	12	14	16	
	لتر	113	170	227	283	340	396	453	
الديب فريزر	قدم			6	8	10	12	14	18
	لتر			170	200	283	340	396	510
	العرض بالتقريب بالمتر			50	70	90	120	144	170

Private Picture : www.MBSMGROUP.TN

Private Picture Copyright : WWW.MBSM.PRO

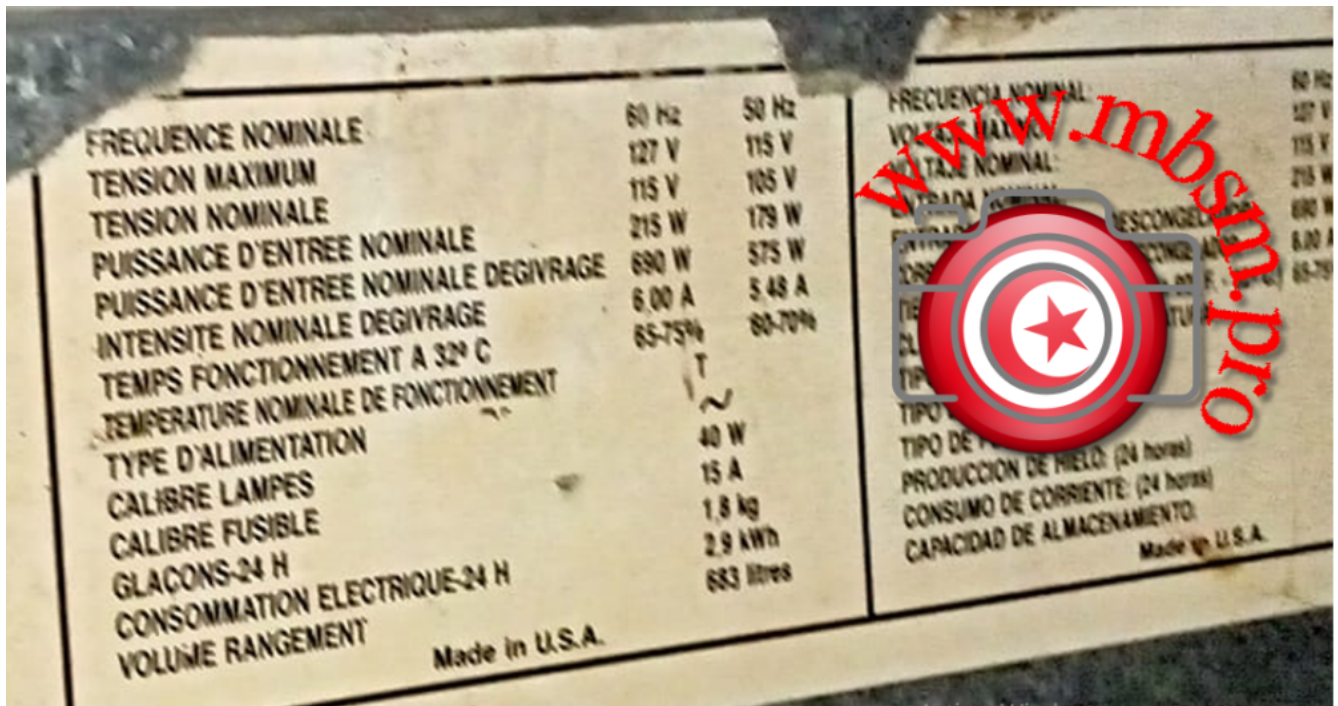

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Refrigerator, Compressor, Samsung, 1/4 Hp, r134a, 150g, MK172HL1UA, MK172H-L1UA, MK172HL1UA/TSE, 200/220V-50HZ/ 135W, 200/220V-60HZ/159W, RSCR

Category: compressor

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO

https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm_dot_pro_private_PDF_compressor-catalogue-2015-1.pdf

SPECIFICATION

REFRIGERATOR MODEL NO :	RT41MASW
DIMENSION(WxDxH) :	670mm x 650mm x 1685mm
GROSS CAPACITY :	410 l
RATED VOLTAGE :	220V
RATED FREQUENCY :	60Hz
RATED INPUT :	136W
RATED CURRENT :	0.86A
DEFROSTING INPUT(W/A) :	274W/1.24A
CLIMATIC CLASS OF THE APPLIANCE :	T
RATED MAXIMUM INPUT OF LAMP :	30 W
NAME OF REFRIGERANT :	R-134a
MASS OF REFRIGERANT :	150 g
NET WEIGHT :	67 Kg
NAME OF INSULATION BLOWING GAS :	CYCLOPENTANE
MADE IN THAILAND	

DA68-01618A



Picture Copyright : WWW.MBSM.PRO

			220-60	118	137	468	114	1.04	1.20	4.11	
AC 200-220V~50Hz, 220V~60Hz	NC1A43HLB	RSCR	220-50	102	119	405	91	1.12	1.30	4.45	ST
			220-60	118	137	468	100	1.18	1.37	4.68	
	SD152H-S1UB	RSCR	220-50	120	140	476	113	1.06	1.23	4.21	ST
			220-60	146	170	580	122	1.20	1.39	4.75	
	SD162H-L1UB	RSCR	220-50	146	170	580	139	1.05	1.22	4.17	ST
			220-60	182	212	723	152	1.20	1.39	4.75	
	SK170H-L1UB	RSCR	220-50	168	195	667	153	1.10	1.28	4.36	ST
			220-60	206	240	818	164	1.26	1.46	4.99	
	MSA170H-L1B	RSCR	220-50	173	201	687	141	1.23	1.43	4.87	ST
			220-60	220	256	873	163	1.35	1.57	5.36	
	MK172H-L1U	RSCR	220-50	176	205	699	131	1.34	1.56	5.33	ST/OC
			220-60	224	260	889	159	1.41	1.64	5.59	
	MK172H-L1UA	RSCR	220-50	176	205	699	135	1.30	1.52	5.18	ST/OC
			220-60	224	260	889	159	1.41	1.64	5.59	
	SK182H-L2UA	RSCR	220-50	203	236	806	182	1.12	1.30	4.43	FC/OC
			220-60	239	278	949	191	1.25	1.46	4.97	

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, cubigel, huayi,

ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright : WWW.MBSM.PRO

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm³, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm³, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C -15 °C -20 °C -25 °C -30 °C -35 °C

344	276	216	166	124	92
Shipping Class	Standard				
Scope Of Application	LBP				
Lieferzeit	2-3 Wochen				
Type Of Construction	Piston				
Condensation Temperature	55°C				
Maker	ACC				
Manufacturer No.	HPY14AA				
Displacement In Cm3	14.32				
Measuring Requirements	Ashrae				
Refrigerants	R600a				
Series	HPY				
Condensing Units Compressors	Compressors				
Suspense	220-240V				
Weight In Kg	13				

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm³, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm³, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with "immediately available" and "scarce stock", usually delivery within 2 days. For "currently not available" delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH

Stroke volume (cm ³):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1






Private Picture Copyright: WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_HPYP14AA-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_HPYP14AATélécharger](#)

Mbsm.pro, aj600ft-352, 12400Btu,
Window clim, AJB5515EXD, 208-230V ~
60Hz 200V ~ 50Hz, HBP/AC – Air
Conditioning, R-22/R-407C

Category: compressor

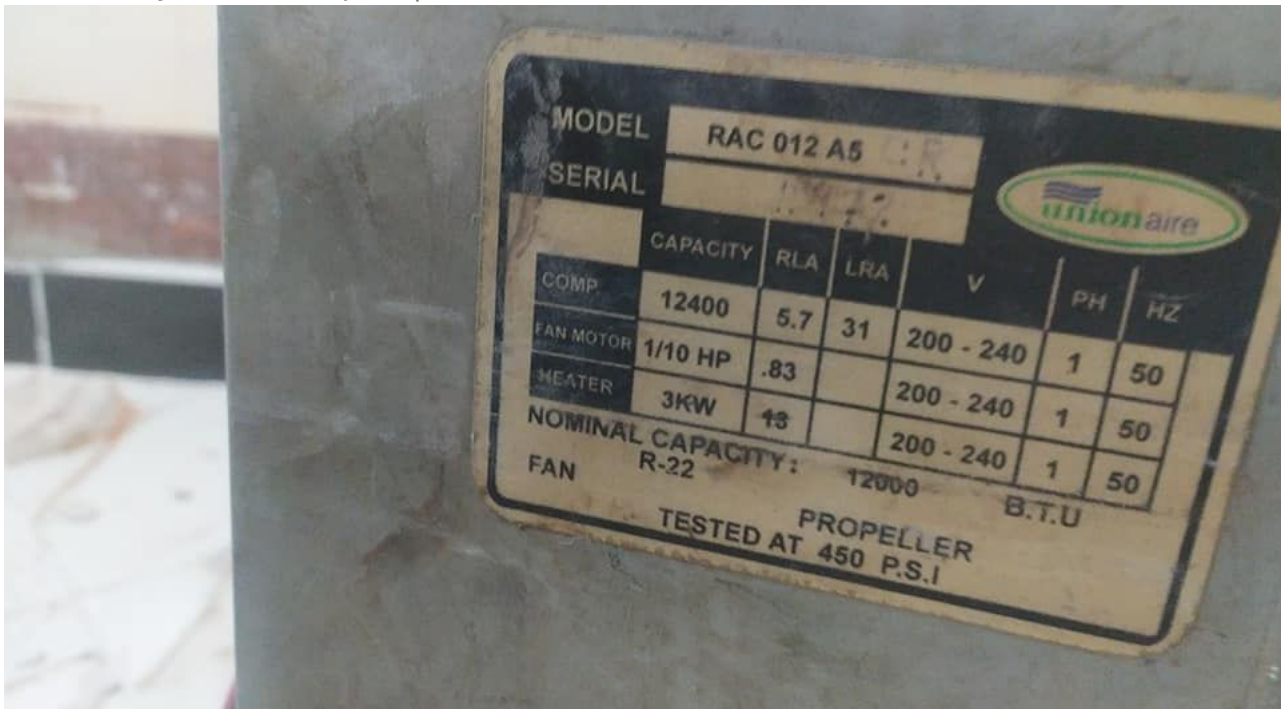

Private Picture Copyright: WWW.MBSM.PRO

Product Specifications

Performance

Condition	Test Voltage	(R) Btu/h	(R) kcal/h	(R) W	(I) W	(E) Btu/Wh	(E) kcal/Wh	W/W	EVAP TEMP	COND TEMP	AMBIENT TEMP	RETURN GAS	LIQUID TEMP
ASHRAE (R-22)	230V ~ 60HZ	15000	3780	4395	1800	8.33	2.1	2.44	7.2°C (45°F)	54°C (130°F)	35°C (95°F)	35°C (95°F)	46°C (115°F)

General

Evaporating Temp. Range: -23.3°C to 12.8°C (-10°F to 55°F)

Motor Torque: Low Start Torque (LST)

Compressor Cooling: Fan

Mechanical

Weight: 49

Weight Unit of Measure: LB

Displacement (cc): 26.122

Oil Type: Polyolester

Viscosity (cSt): 32

Oil Charge (cc): 781

Electrical

Voltage Range (50 Hz): 180-220

Voltage Range (60 Hz): 197-254

Locked Rotor Amps (LRA): 41

Rated Load Amps (RLA 50 Hz): 0

Rated Load Amps (RLA 60 Hz): 8.5
Max. Continuous Current (MCC in Amps): 12.6
Motor Resistance (Ohm) – Main: 1.49
Motor Resistance (Ohm) – Start: 7.77
MotorType: PSC
Overload Type: N/A
Relay Type: N/A

Agency Approval

cURus Recognized

OEM

AJ600FT-299-A4


Dimensions – Height: 10.719
Dimensions – Width: 7.25
Dimensions – Length: 9.343
Dimensions Unit of Measure: IN
Market: OEM
Overload #: 8300CRAA46
Replacement Overload Kit #: K90-34
Replacement Relay Kit #: K71-19
Overload Spring: 26056
Cover Gasket: 30640
Terminal Cover: 70492
Bale Strap: 70491
Discharge Line Size: 0.3125 IN
Suction Line Size: 0.5 IN

Wholesale/Distribution

AJ600FT-205-J7

Dimensions – Height: 10.719
Dimensions – Width: 6.594
Dimensions – Length: 11.696
Dimensions Unit of Measure: IN
Market: Wholesale/Distribution
Overload #: 8300CRAA46
Replacement Overload Kit #: K90-34
Replacement Relay Kit #: K71-19
Overload Spring: 26056
Cover Gasket: 30640
Terminal Cover: 70492
Bale Strap: 70491

Discharge Line Size: 0.3125 IN
Suction Line Size: 0.5 IN
Loose Part Kit: LP121

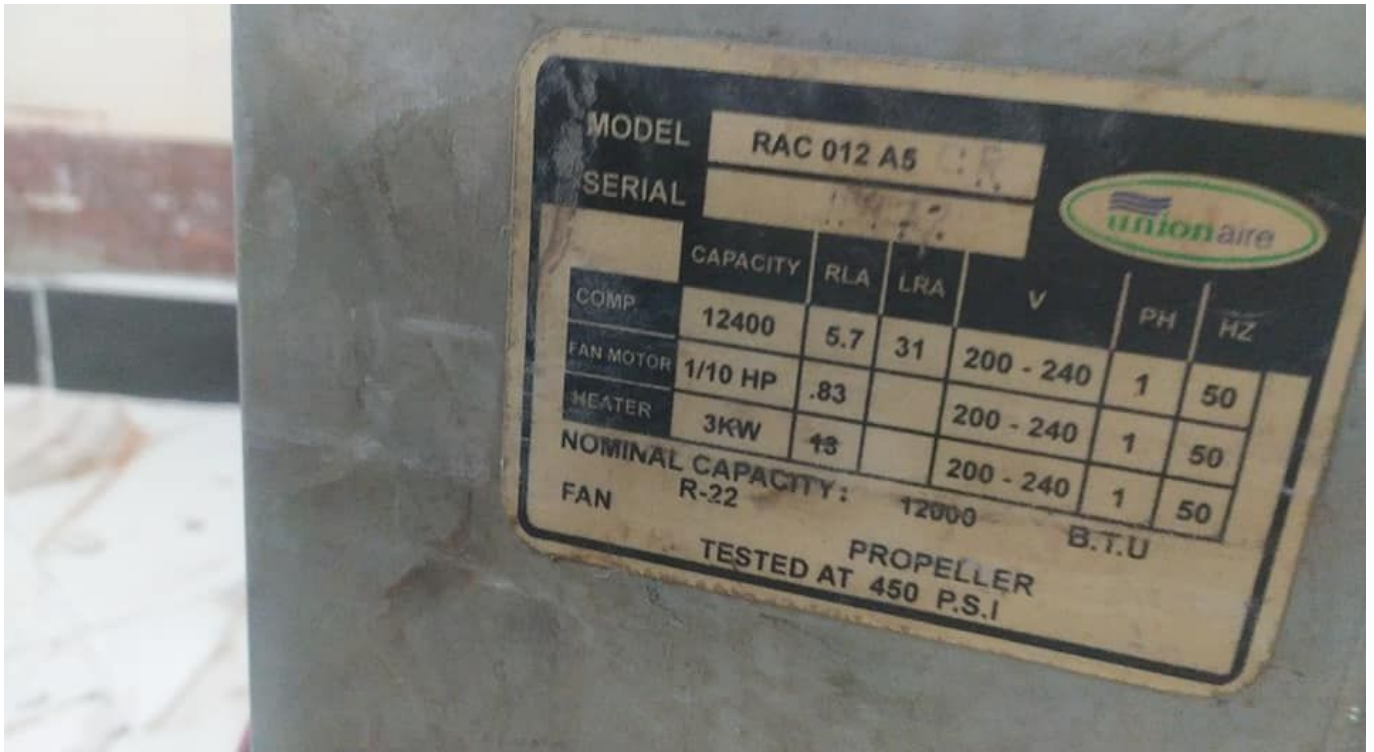

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_aj600ft-352-Tecumseh-Compressor-Product-RangeTélécharger

Mbsm_dot_pro_private_PDF_aj600ft-352-tecumseh_to_tecumseh_cross_refTélécharger