

Mbsm.pro , Compressor ESC 8.5, R134a,
Necchi (530591) , 1/5 Hp ,159 w

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

| | Motore | cm ³ | Volt | Watt -10°C | Watt -30°C | |
|---------|-------------------------------------|-----------------|-------|------------|------------|-----|
| RIB5150 | A9EV – R22 – 3/8 – LBP | CSR | 9,29 | 220 | 642 | |
| RIB5160 | A11EV – R22 – 1/2 Hp – LBP | CSR | 11,11 | 220 | 781 | |
| RIB5350 | A13EV – R22 – 5/8 Hp – LBP | CSR | 13,35 | 220 | 967 | |
| RIB5450 | N17EV – R22 – 3/4 Hp – LBP | CSR | 17,52 | 220 | 1221 | |
| RIB5550 | N21EV – R22 -1- Hp LBP | CSR | 20,68 | 220 | 1464 | |
| RIB5650 | N23EV – R22 – 1,2 Hp – LBP | CSR | 23,18 | 230 | 1616 | |
| RIB7104 | NB4 COMPRESS. R12 24V. FRAMEC 1/8 = | | | | | |
| RIB7108 | NB8 COMPRESS. R12 24V.FRAMEC 175w.= | | | | | |
| RIB7113 | NB13HP COMPRESS.R12 24V.FRAMEC 1/3= | | | | | |
| RIBB010 | ETR 3 – R134A – 1/12 Hp – LBP | RSIR | 3,00 | 220 | 127 | |
| RIBB020 | ETR 3,5 HP 1/10 R134A – LBP | RSIR | 3,50 | 220 | 156 | |
| RIBB030 | ETR 4 HP 1/8 R134A – LBP | RSIR | 4,10 | 220 | 179 | |
| RIBB040 | ETR 5 – R134a – HP 1/6 – LBP | RSIR | 5,12 | 220 | 231 | |
| RIBB050 | ETR5,5 – R134a – 1/6 Hp – LBP | RSIR | 5,55 | 220 | 257 | |
| RIBB080 | ESC5 – R134a – 1/6 Hp – LBP | RSIR | 5,12 | 220 | 222 | |
| RIBB100 | ESC7 – R134a – 1/5 Hp – LBP | RSIR | 7,00 | 220 | 307 | |
| RIBB110 | ESC8 – R134a – 1/5 Hp – LBP | RSIR | 7,75 | 220 | 358 | |
| RIBB130 | ESC9 – R134a – 1/4 Hp – LBP | RSIR | 9,07 | 220 | 424 | |
| RIBB140 | ESC11 – R134a – 1/3 Hp – LBP | RSIR | 10,63 | 220 | 501 | |
| RIBB200 | ESC4H – R134a – 1/8 Hp – LBP | RSIR | 4,10 | 220 | 177 | |
| RIBB400 | ESR 7 – R134a – 1/5 Hp – LBP | RSIR | 7,00 | 220 | 307 | |
| RIBB410 | ESR 8 – R134a – 1/5 Hp – LBP | RSIR | 7,75 | 220 | 358 | |
| RIBB430 | ESR 9 – R134a – 1/4 Hp – LBP | RSIR | 9,07 | 220 | 424 | |
| RIBB440 | ESR11 – R134a – 1/3 Hp – LBP | RSIR | 10,63 | 220 | 501 | |
| RIBE040 | TN17EV – R404 – 3/4 Hp – LBP | CSR | 17,52 | 220 | | 565 |
| RIBE050 | TN21EV – R404 – 1 Hp – LBP | CSR | 20,68 | 220 | | 644 |
| RIBE060 | TN23EV – R404 – 1,2 Hp – LBP | CSR | 23,18 | 220 | | 726 |
| RIBT999 | COMPRESSORE ELECTROLUX DESCR.BOLLA | | | | | |



| neue Type | Vorgänger Type | Kältemittel | Bereich | 1)Betrieb | 2)Leistungs- aufnahme Watt | 3)Strom- aufnahme A | 4) füllung cm ³ | Bestell-Nr. |
|---------------------------|----------------|-------------|---------|-----------|----------------------------------|---------------------------|----------------------------------|-------------|
| mit Esterölfüllung | | | | | | | | |
| *ETR 3 | - | R134a | LBP | K | 68 | 0,55 | 185 | *230.051 |
| *ETR 3,5 | - | R134a | LBP | K | 81 | 0,58 | 185 | *230.053 |
| *ETR 4 | - | R134a | LBP | K | 89 | 0,64 | 185 | *230.055 |
| *ETR 5 | - | R134a | LBP | K | 109 | 0,76 | 185 | *230.057 |
| *ETR 5,5 | - | R134a | LBP | K | 118 | 0,80 | 185 | *230.059 |
| *ESR 7 | ESC 7 | R134a | LBP | K | 127 | 0,83 | 220 | *230.073 |
| *ESR 8 | ESC 8 | R134a | LBP | K | 149 | 1,00 | 220 | *230.075 |
| *ESR 8,5 | ESC 8,5 | R134a | LBP | K | 159 | 1,07 | 220 | *230.077 |
| *ESR 9 | ESC 9 | R134a | LBP | K | 177 | 1,20 | 220 | *230.079 |
| *ESR 11 | ESC 11 | R134a | LBP | K | 215 | 1,62 | 220 | *230.081 |
| ETR 4H | ES(C)R4H | R134a | HBP | K | 187 | 1,13 | 185 | - |
| ETR 5H | ES(C)R5H | R134a | HBP | K | 231 | 1,30 | 185 | - |
| ETR 7H | ESC 7H | R134a | HBP | K | 288 | 1,61 | 220 | - |
| ETR 9H | ESC 9H | R134a | HBP | K | 396 | 2,31 | 220 | - |
| ETR 11H | ESC 11H | R134a | HBP | K | 472 | 2,64 | 220 | - |
| TA 13 EV | - | R404 A | LBP | K/E | 463 | 2,15 | 950 | 230.096 |
| TN 17 EV | - | R404 A | LBP | K/E | 627 | 2,93 | 950 | 230.097 |
| TN 21 EV | - | R404 A | LBP | K/E | 727 | 3,61 | 950 | 230.099 |

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions, Tester ok
written by www.mbsm.pro | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP
- ASPERA

SKU: 3070180

Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO




embraco **NT**



R134a

HBP

EM/NE/NT/NJ

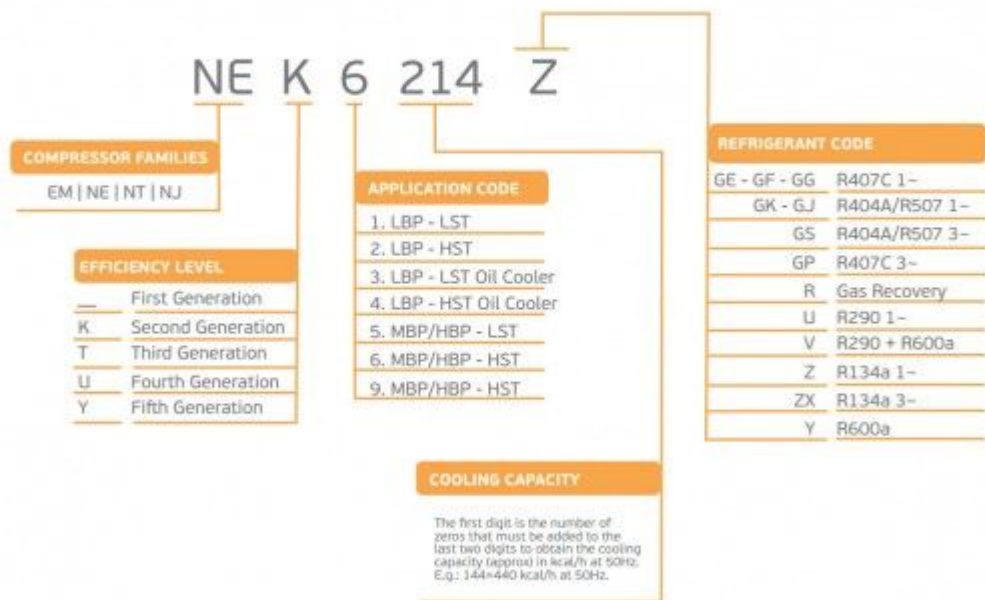

| 50Hz 50-60Hz | R134a | | | | | | | |
|-----------------|-------|----------------|----------------------|----------------|-----------|----------------|----------------------|----------------|
| | LBP | VOLT. FREQ. | COOL. CAP. [W] | DISPL. [cc] | HBP | VOLT. FREQ. | COOL. CAP. [W] | DISPL. [cc] |
| NT NTU | | | | | NT6215Z | C / N | 1.405 | 17,39 |
| | | | | | NT6217Z | A / N | 1.619 | 20,44 |
| | | | | | NT6220Z | N | 1.744 | 22,37 |
| | | | | | NTU6222ZV | A | 2.117 | 23,70 |
| | | | | | NTU6224ZV | A | 2.582 | 27,80 |

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration
Compressor, CAE9460Z ,R404A
refrigerant ,3/8 hp, mhbp, 1/2HP
,1PH(phase) , 220V to 240V

Category: Solutions,Tester ok
written by Jamila | 12 October 2018

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_{LA} 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A refrigerant ,1/2HP
,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_{LA} 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

LOW BACK PRESSURE COMPRESSORS

| Type | COMPRESSOR MODELS | Nominal Power (H.P.) | | | REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts) | | | | | | | | VOLTAGE |
|-----------|-------------------|----------------------|-------------|---------------------------------|---|-------|-------|-------|-------|---------|-------|--------------------------------|----------------------------------|
| | | t | Refrigerant | Displacement (cm ³) | Evaporating Temperature | | | | | | | | |
| | | | | | Oil charge (cm ³) | -45°C | -40°C | -35°C | -30°C | -23.3°C | -20°C | -10°C | |
| | | | | | | t | t | t | t | t | t | t | |
| PISTON | AEZ2415Z | 7/16 | R404A | 8.1 | 350 | | | 160 | 231 | 355 | 429 | 703 | 220-240V/1/50Hz |
| | CAE2417Z | 7/16 | R404A | 11.3 | 350 | 37.8 | 62 | 161 | 280 | 460 | 557 | 891 | 220-240V/1/50Hz |
| | CAE2420Z | 1/2 | R404A | 12.6 | 350 | 194 | 179 | 232 | 357 | 547 | 654 | 1047 | 220-240V/1/50Hz |
| | CAE2424Z | 5/8 | R404A | 15.1 | 350 | 228 | 180 | 291 | 442 | 664 | 783 | 1199 | 220-240V/1/50Hz |
| | CAJ2428 | 3/4 | R404A | 15.2 | 887 | | | 306 | 434 | 628 | 773 | 1246 | 220-240V/1/50Hz 400V/3/50Hz |
| | TAJ2428Z | | | | | | | | | | | | |
| | CAJ2432Z | 3/4 | R404A | 18.3 | 887 | 331 | 285 | 318 | 510 | 792 | 950 | 1560 | 220-240V/1/50Hz 400V/3/50Hz |
| | TAJ2432Z | | | | | | | | | | | | |
| | CAJ2440Z | 1 | R404A | 21 | 887 | 532 | 394 | 452 | 647 | 975 | 1166 | 1876 | 220-240V/1/50Hz |
| | CAJ2446Z | 1 | R404A | 26.15 | 887 | 702 | 575 | 549 | 797 | 1194 | 1423 | 2290 | 220-240V/1/50Hz 400V/3/50Hz |
| | TAJ2446Z | | | | | | | | | | | | |
| | CAJ2464Z | 1-1/2 | R404A | 34.45 | 887 | 805 | 626 | 723 | 1076 | 1605 | 1902 | 3012 | 220-240V/1/50Hz 400V/1/3/50Hz |
| | TAJ2464Z | | | | | | | | | | | | |
| | FH2480Z | 2 | R404A | 53.2 | 1625 | 292 | 420 | 738 | 1319 | 2183 | 2662 | 4419 | 220-240V/1/50Hz 400V/3/50Hz |
| TFH2480Z | | | | | | | | | | | | | |
| FH2511Z | 3 | R404A | 74.25 | 1625 | 1561 | 1203 | 1380 | 2016 | 3135 | 3796 | 6222 | 220-240V/1/50Hz 400V/3/50Hz | |
| TFH2511Z | | | | | | | | | | | | | |
| TAG2516Z | 4 | R404A | 112.5 | 1960 | 1696 | 1407 | 1743 | 2704 | 4356 | 5335 | 9038 | 400V/3/50Hz | |
| TAGP2516Z | | | | | | | | | | | | | |
| TAG2522Z | 6 | R404A | 134.8 | 1960 | 2541 | 2012 | 2378 | 3542 | 5522 | 6688 | 11062 | 400V/3/50Hz | |
| TAGP2522Z | | | | | | | | | | | | | |

PictureS Mbsm Dot Pro : www.mbsm.pro

THE NEW TWO GENERATION BRAZIL COMPRESSORS

| TYPE | COMPRESSOR MODELS | Nominal Power (H.P.) | | | REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts) | | | | | | | | VOLTAGE | |
|--------|-------------------|----------------------|-------------|---------------------------------|--|-------|-------|-------|------|------|------|-------|-----------------|-------|
| | | t | Refrigerant | Displacement (cm ³) | Evaporating Temperature | | | | | | | | | |
| | | | | | Oil charge (cm ³) | -20°C | -15°C | -10°C | -5°C | 0°C | +5°C | +10°C | | +15°C |
| | | | | | | t | t | t | t | t | t | t | | t |
| PISTON | AE4425Z-FZ1A | 1/5 | R404A | 4.24 | 222 | 228 | 290 | 362 | 446 | 545 | 659 | 792 | 220-240V/1/50Hz | |
| | AE4430Z-FZ1A | 1/4 | R404A | 5.16 | 216 | 293 | 375 | 466 | 568 | 685 | 821 | 977 | 220-240V/1/50Hz | |
| | AE4440Z-FZ1A | 1/3 | R404A | 6.69 | 278 | 377 | 482 | 599 | 730 | 881 | 1055 | 1257 | 220-240V/1/50Hz | |
| | AE4450Z-FZ1A | 7/16 | R404A | 8.85 | 369 | 500 | 640 | 795 | 970 | 1170 | 1401 | 1688 | 220-240V/1/50Hz | |
| | AE4460Z-FZ1C | 1/2 | R404A | 10.33 | | 636 | 784 | 959 | 1160 | 1380 | 1630 | 1920 | 220-240V/1/50Hz | |

Tecumseh Compressor

LOW BACK PRESSURE COMPRESSORS

| TYPE | COMPRESSOR MODELS | Nominal Power (H.P.) | | | REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts) | | | | | | VOLTAGE | |
|--------|-------------------|----------------------|-------------|---------------------------------|---|-------|-------|-------|-------|-------|---------|-----------------|
| | | t | Refrigerant | Displacement (cm ³) | Evaporating Temperature | | | | | | | |
| | | | | | Oil charge (cm ³) | -35°C | -30°C | -25°C | -20°C | -15°C | | -10°C |
| | | | | | | t | t | t | t | t | | t |
| ROTARY | RGA/HGA2426Z | 2/3 | R404A | 9.50 | 290 | 375 | 474 | 590 | 726 | 888 | 1080 | 220-240V/1/50Hz |
| | RGA/HGA2432Z | 4/5 | R404A | 11.50 | 290 | 451 | 567 | 707 | 872 | 1065 | 1290 | 220-240V/1/50Hz |
| | RGA/HGA2436Z | 1 | R404A | 12.70 | 290 | 508 | 643 | 804 | 994 | 1219 | 1483 | 220-240V/1/50Hz |

PictureS Mbsm Dot Pro : www.mbsm.pro

Tecumseh Compressor

MEDIUM/HIGH BACK PRESSURE COMPRESSORS


| TYPE | COMPRESSOR MODELS | Nominal Power (H.P.) | | REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts) | | | | | | | | VOLTAGE | |
|--------|-------------------|----------------------|-------------|---|-------------------------------|-------------------------|-------|------|------|------|-------|---------|-----------------|
| | | | Refrigerant | Displacement (cm ³) | Oil charge (cm ³) | Evaporating Temperature | | | | | | | |
| | | | | | | -15°C | -10°C | -5°C | 0°C | +5°C | +10°C | | +15°C |
| | | | | | | | | | | | | | |
| ROTARY | RGA/HGA4467Z | 1/2 | R404A | 9.50 | 290 | 679 | 847 | 1047 | 1283 | 1557 | 1872 | 2231 | 220-240V/1/50Hz |
| | BGA/HGA4480Z | 2/3 | R404A | 11.50 | 290 | 825 | 1017 | 1252 | 1530 | 1851 | 2212 | 2613 | 220-240V/1/50Hz |
| | RGA/HGA4492Z | 3/4 | R404A | 12.50 | 290 | 905 | 1133 | 1398 | 1706 | 2060 | 2468 | 2932 | 220-240V/1/50Hz |
| | RGA/HGA4512Z | 1 | R404A | 16.10 | 290 | 1163 | 1438 | 1770 | 2160 | 2609 | 3118 | 3689 | 220-240V/1/50Hz |
| | RGA/HGA4445Y | 1/3 | R134a | 9.50 | 290 | 392 | 493 | 618 | 770 | 954 | 1173 | 1430 | 220-240V/1/50Hz |
| | RGA/HGA4450Y | 2/5 | R134a | 11.50 | 290 | 501 | 625 | 778 | 963 | 1184 | 1445 | 1749 | 220-240V/1/50Hz |
| | RGA/HGA4460Y | 1/2 | R134a | 12.70 | 290 | 537 | 677 | 844 | 1045 | 1287 | 1576 | 1920 | 220-240V/1/50Hz |

PictureS Mbsm Dot Pro : www.mbsm.pro



Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series- Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



| R134A 220/ 50HZ | | TECUMSEH | | MOTEC | | FINLEY | | BLUESTAR | |
|--------------------|------------|----------|---------|--------|---------|--------|--------|----------|--|
| POTENCIA | MOD | COD RM | MOD | COD RM | MOD | COD RM | MOD | COD RM | |
| 1/6 HP | THG1358YS | MT0033 | GFM44AA | MT0160 | HCF16XL | MT0218 | ADW51 | MT0098 | |
| 1/5 HP | THG1365YS | MT0034 | GFF57AA | MT0161 | HCF15XL | MT0219 | ADW57 | MT0149 | |
| 1/5+ HP | THG1374YS | MT0035 | - | - | - | - | ADW66 | MT0090 | |
| 1/4 HP | TSB1380YGS | MT0036 | GFF66AA | MT0122 | HCF14XL | MT0205 | ADW91 | MT0082 | |
| 1/4+ HP | TSB1390YS | MT0037 | GFF75AA | MT0123 | HCF14-L | MT0204 | - | - | |
| 1/3 HP | TCW410YS | MT0038 | GFF86AA | MT0120 | HCF13XL | MT0206 | ADW110 | MT0084 | |
| 1/3+ HP | TCW413Y | MT0039 | GFF93AA | MT0121 | HCF13-L | MT0207 | ADW128 | MT0158 | |

MOTOCOMPRESORES COMERCIALES

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W

MBSM.PRO ,Copeland ,KCE432HAG ,Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment,High / Medium temperature (HBP / CBP)

Category: Solutions,Tester ok
written by Jamila | 12 October 2018

Performance Nominals

| High Back Pressure | | | Commercial Back Pressure | | | | | | | | |
|---------------------------|--------|-------------------------|--------------------------|----------|-------|---------|----------|------|--------------------|---------------------|---------------|
| Model | HP | Displacement cc per Rev | Capacity | | | | | | Cooling Type (CFM) | Oil Charge Qty (cc) | Net Wt. (Kg.) |
| | | | 7.2°C | | | -6.7°C | | | | | |
| | | | Btu/Hr. | kCal/Hr. | Watt | Btu/Hr. | kCal/Hr. | Watt | | | |
| R134a, 50Hz, 1 Phase | | | | | | | | | | | |
| KCE419HAG | 1/6 | 5.79 | 1585 | 399 | 465 | 860 | 217 | 252 | Fan 350 | 310 | 10.2 |
| KCN413CAG | 1/6 | 6.15 | - | - | - | 1080 | 272 | 316 | Fan 350 | 340 | 9.7 |
| KCE425HAG | 1/5 | 7.58 | 2145 | 540 | 629 | 1075 | 271 | 315 | Fan 350 | 310 | 10.8 |
| KCN416CAG | 1/5 | 7.31 | - | - | - | 1380 | 338 | 392 | Fan 350 | 340 | 9.7 |
| KCE432HAG | 1/4 | 9.42 | 2690 | 678 | 788 | 1330 | 332 | 390 | Fan 350 | 310 | 11.8 |
| KCE444HAG | 3/8 | 12.05 | 3675 | 926 | 1077 | 1880 | 474 | 551 | Fan 350 | 310 | 11.8 |
| KCN444HAG | 3/8 | 12.58 | 3700 | 932 | 1064 | 1720 | 433 | 504 | Fan 350 | 890 | 20.2 |
| KCN463HAG | 1/2 | 15.33 | 5250 | 1323 | 1538 | 3130 | 789 | 917 | Fan 350 | 380 | 11.5 |
| KCE467HAG | 1/2 | 18.27 | 5600 | 1411 | 1640 | 2830 | 713 | 829 | Fan 350 | 890 | 21.0 |
| KCN498HAG | 3/4 + | 25.91 | 8200 | 2066 | 2402 | 4100 | 1033 | 1201 | Fan 350 | 890 | 21.5 |
| R134a, 60Hz, 1 Phase 230V | | | | | | | | | | | |
| KCE432HAG | 1/4 | 9.42 | 3225 | 813 | 944 | 1595 | 402 | 487 | Fan 350 | 310 | 11.8 |
| KCE444HAG | 3/8 | 12.05 | 4275 | 1077 | 1252 | 2187 | 551 | 640 | Fan 350 | 310 | 11.8 |
| KCN463HAG | 1/2 | 15.33 | 6300 | 1588 | 1845 | 3243 | 868 | 1008 | Fan 350 | 380 | 11.5 |
| KCE467HAG | 1/2 | 18.27 | 6700 | 1688 | 1964 | 3120 | 786 | 914 | Fan 350 | 890 | 21.0 |
| KCN498HAG | 3/4 + | 25.91 | 9250 | 2330 | 2710 | 4633 | 1167 | 1358 | Fan 350 | 890 | 21.5 |
| R134a, 60Hz, 115V | | | | | | | | | | | |
| KCE444HAG | 1/3 | 12.05 | 4200 | 1058 | 1231 | 2175 | 548 | 637 | Fan 350 FM | 310 | 11.8 |
| R22, 50Hz, 1 Phase | | | | | | | | | | | |
| KCE443HAE | 1/3 | 8.00 | 3600 | 907 | 1054 | 1620 | 408 | 475 | Fan 350 | 310 | 11.8 |
| KCE461HAE | 1/2 | 11.50 | 5100 | 1285 | 1494 | 2590 | 653 | 759 | Fan 350 | 590 | 13.4 |
| KCE511HAE | 1 | 18.27 | 9350 | 2356 | 2740 | 4210 | 1061 | 1234 | Fan 350 | 905 | 21.5 |
| KCE513HAE | 1 1/4 | 25.91 | 12800 | 3225 | 3749 | 6366 | 1604 | 1865 | Fan 350 | 890 | 22.5 |
| CR22K6M-PF1 | 1 1/2+ | 40.80 | 19000 | 4768 | 5563 | 8920 | 2248 | 2614 | Fan 400 | 1330 | 29.8 |
| CR30K6M-PF1 | 2 1/2 | 51.47 | 25000 | 6300 | 7330 | 12000 | 3024 | 3516 | Fan 400 | 1330 | 32.5 |
| CR36K6-PFZ | 3 | 59.65 | 30100 | 7585 | 8814 | 14200 | 3578 | 4161 | Fan 400 | 1330 | 34.9 |
| CR42K6-PFZ | 3 1/2 | 72.08 | 36100 | 9100 | 10570 | 17300 | 4360 | 5069 | Fan 400 | 1330 | 34.9 |
| R22, 50Hz, 3 Phase | | | | | | | | | | | |
| CR22K6M-TFM | 1 1/2+ | 40.80 | 18350 | 4633 | 5373 | 8260 | 2082 | 2420 | Fan 400 | 1330 | 29.5 |
| CR30K6M-TFM | 2 1/2 | 51.47 | 24400 | 6161 | 7144 | 11600 | 2923 | 3399 | Fan 400 | 1330 | 30.0 |
| CR36K6-TF6 | 3 | 59.66 | 29900 | 7535 | 8755 | 14500 | 3654 | 4249 | Fan 400 | 1330 | 31.0 |
| CR42K6-TF5 | 3 1/2 | 72.09 | 35100 | 8845 | 10278 | 17200 | 4334 | 5040 | Fan 400 | 1330 | 32.7 |
| KCG554HAE | 4 1/2 | 99.96 | 45000 | 11340 | 13185 | - | - | - | Fan 420 | 2250 | 50.1 |
| KCG562HAE | 5 | 117.65 | 52000 | 13100 | 15236 | - | - | - | Fan 420 | 2250 | 50.7 |
| KCG572HAE | 6 | 133.22 | 60000 | 15120 | 17580 | - | - | - | Fan 420 | 2250 | 51.4 |
| R22, 60Hz, 1 Phase | | | | | | | | | | | |
| KCE461HAE | 1/2 | 11.50 | 6100 | 1537 | 1788 | 3082 | - | - | Fan 350 | 510 | 13.4 |
| KCE511HAE | 1 | 18.27 | 10500 | 2646 | 3077 | 4210 | 1061 | 1234 | Fan 350 | 905 | 21.5 |

Private Picture Copyright : WWW.MBSM.PRO

MBSM.PRO ,Copeland ,KCE432HAG ,Compressur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment,High / Medium temperature (HBP / CBP)

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Zel gml200a gml180a gml160g gml140a

gml110a r134a Compressors

- gml200a 152W
- GML180A 144W
- gml160g 129W
- gml140a 108W
- GML110A 90W

Place of purchase:
Mainland China

Brand:
West of Monza


Color classification:
gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:
R134a

Voltage:
220-240V 50HZ

Working conditions:
Low back pressure



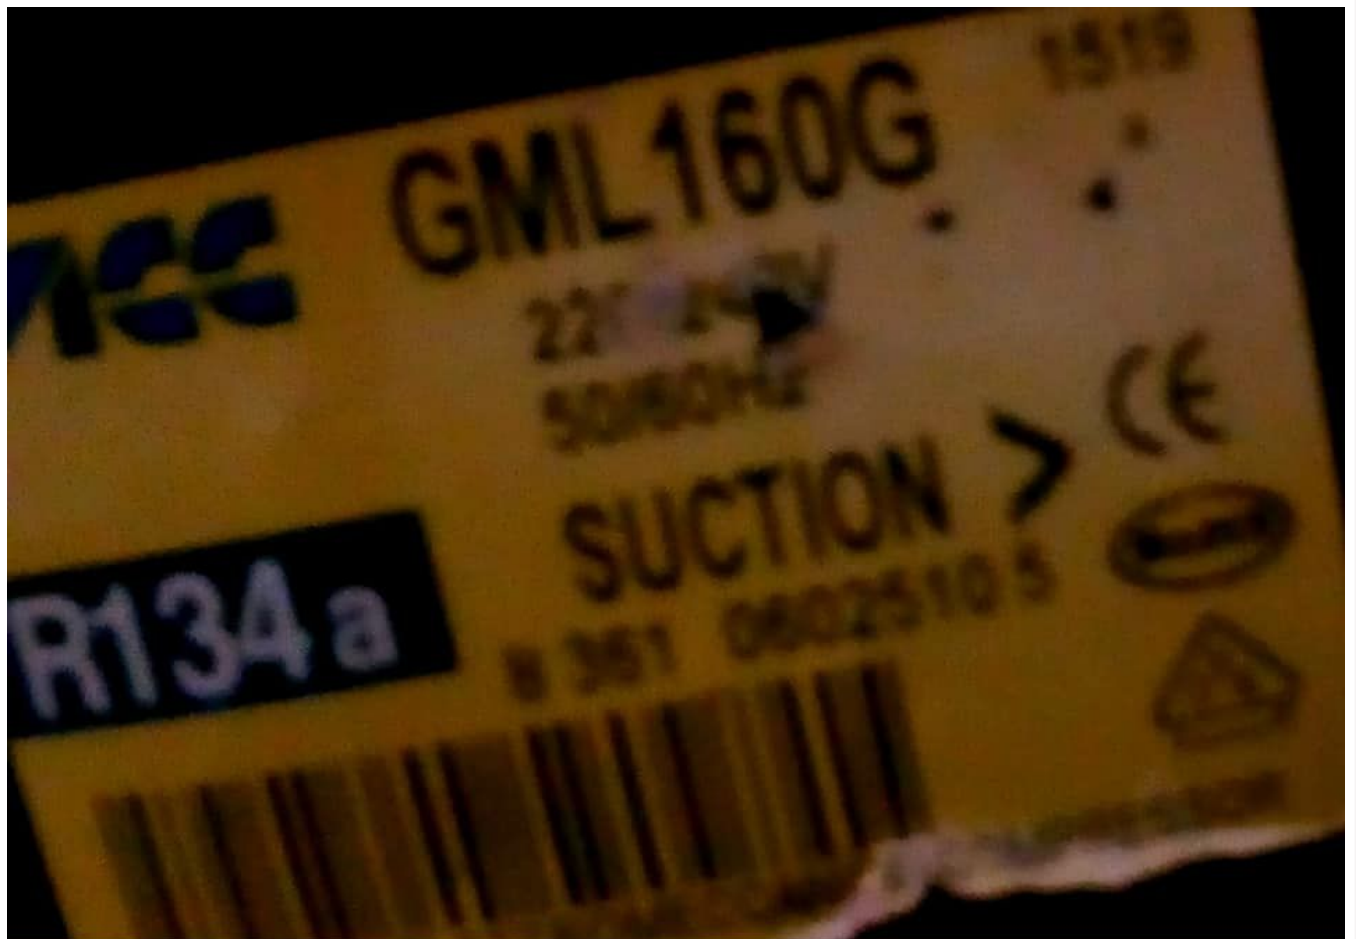

PictureS Mbsm Dot Pro : www.mbsm.pro


Mbsm.pro, GTH93AA , compressor
coolant R134a , 220-240V 50Hz MBP
9,8kg, 1/4HP++, 1/3 hp- cylinder
capacity 9,3cm³, 260 W,

Category: Solutions, Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg 1/4HP
cylinder capacity 9,3cm³

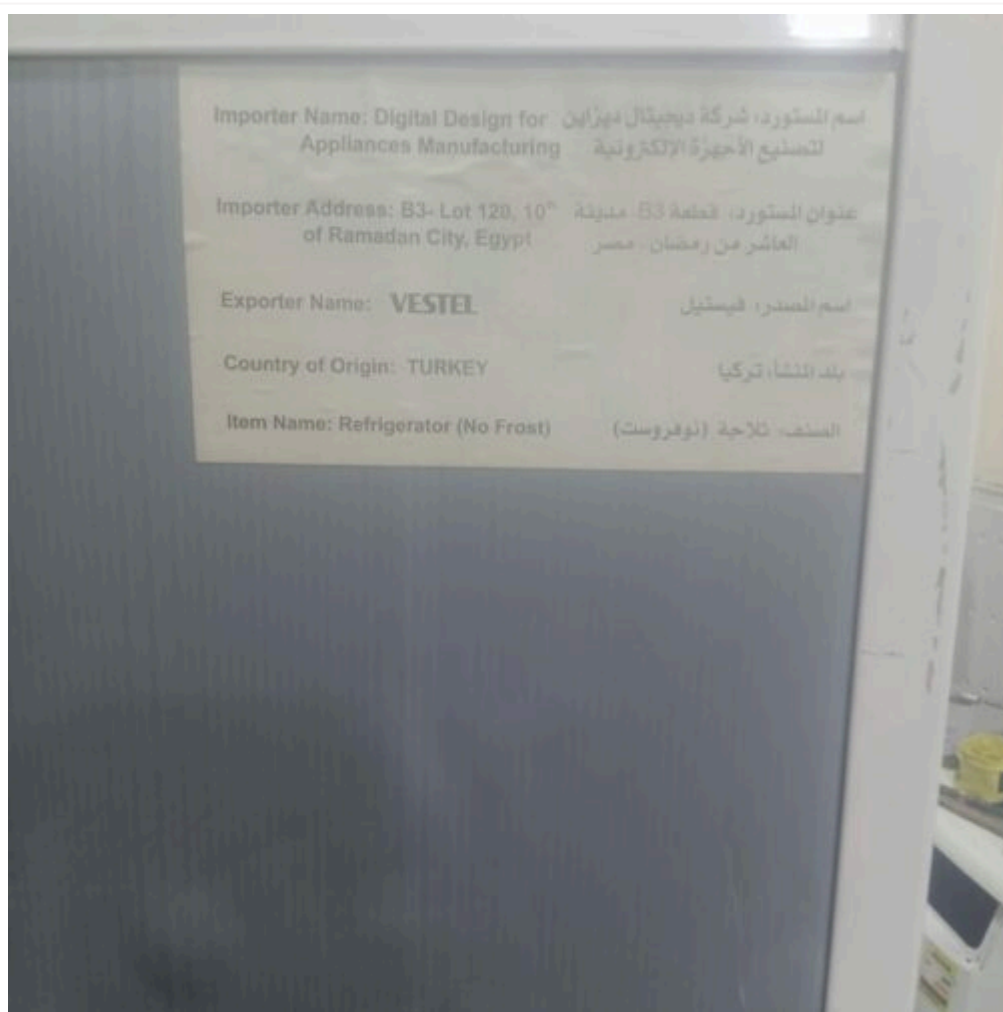



PictureS Mbsm Dot Pro : www.mbsm.pro

| | |
|-------------|-----------|
| refrigerant | R134a |
| type | GTH93AA |
| voltage | 220-240 V |

frequency 50 Hz
application MBP
weight 9,8 kg
power 1/4 HP
cylinder capacity 9,3 cm³
motor system RSIR/RSCR
height 184 mm
power at -20°C – W
power at -15°C – W
power at -10°C – W
power at -5°C – W
power at 0°C – W
power at +5°C – W

Mbsm_dot_pro_private_PDF_GTH93AA-compresseur-acc-cubigell-gl99aaTélécharger
Mbsm_dot_pro_private_PDF_catalog_zelTélécharger

Mbsm.pro, ATA72XL, Lbp compressor, HuaGuang coolant, R134a, 220-240V 50/60Hz, 1/4HP, 1PH, 205 w, Lbp

Category: Solutions, Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a , 220-240V 50/60Hz ,
1/4HP , 1PH
Détails rapides

Lieu d'origine:
Guangdong, Chine

Marque:
Wanbao

Type:
Compresseur de réfrigération

Application:
Pièces de réfrigération

Certification:
ce, CCC / CB / VDE

Réfrigérant:
R134A

Marque:
Wanbao

Tension:
220-240V 50HZ

Déplacement:
72 cm³

Refroidissement:
ST / OC

Type de moteur:
RSIR

Capacité de refroidissement:
185 W

Capacité:
631 BTU

Max. Hauteur "A":
188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des

équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l'étranger-Italie ACC, puis a fondé l'italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l'internationalisation du marché à l'internationalisation de la fabrication et jette des bases solides à l'internationalisation de la marque pour la prochaine étape.

La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d'unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d'appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d'appareils électroménagers haut de gamme.

| Modèle | Réfrigérant | Tension | Capacité de refroidissement (w) | Application | COP (w / w) |
|----------|-------------|-------------|---------------------------------|-------------|-------------|
| AS43 | R134a | 220V / 50Hz | 84 | LBP | 0,94 |
| AS51 | R134a | 220V / 50Hz | 107 | LBP | 1,01 |
| ASD43K | R134a | 220V / 50Hz | 117 | LBP | 1.13 |
| ASD53K | R134a | 220V / 50Hz | 144 | LBP | 1.2 |
| ASD65 | R134a | 220V / 50Hz | 173 | LBP | 1,23 |
| ATA72X | R134a | 220V / 50Hz | 205 | LBP | 1,35 |
| ATA80X | R134a | 220V / 50Hz | 230 1/4 hp++ | LBP | 1,35 |
| ANA90 | R134a | 220V / 50Hz | 255 | LBP | 1,35 |
| AQAW110R | R134a | 220V / 50Hz | 260 | LBP | 1,15 |
| ANA120 | R134a | 220V / 50Hz | 345 | LBP | 1,3 |

Autre compresseur de congélateur wanbao que nous avons:

| Pas | HP | Modèle | Réfrigérant | Qté/Une Palette |
|-----|--------------|---------|-------------|-----------------|
| 1 | 1/10HP | ASD35K | R134a | 100 |
| 2 | 1/6HP | ASD53K | R134a | 80 |
| 3 | 1/5HP | AQAW66X | R134a | 80 |
| 4 | 1/4HP | AQAW77X | R134a | 80 |
| 5 | 1/4HP Gros | AQAW91 | R134a | 80 |
| 6 | 1/3HP | AQAW110 | R134a | 80 |
| 7 | 3/8HP | AL120 | R134a | 80 |
| 8 | 1/2HP | AL150 | R134a | 80 |
| 9 | 1/2HP, grand | AL180 | R134a | 80 |

| 型号 Model | 气缸容积 Displacement | 冷却方式 Cooling | 电机类型 Motor Type | 制冷量 Cooling Capacity | | | | COP | | | 认证 Certification | 最大高度“A” Max. Height "A" |
|---------------------|----------------------|-----------------|--------------------|-------------------------|-----|---------|--------|-----|---------|---------------|---------------------|----------------------------|
| | | | | ASHRAE | | CECOMAF | ASHRAE | | CECOMAF | | | |
| | | | | -23.3℃ | | -25℃ | -23.3℃ | | -25℃ | | | |
| | | | | W | Btu | W | W/W | EER | W/W | | | |
| LBP | | | | | | | | | | | | |
| 220-240V 50HZ R134a | | | | | | | | | | | | |
| T系列 T Series | | | | | | | | | | | | |
| ATA72X | 7.2 | ST/OC | RSIR | 205 | 699 | 155.3 | 1.35 | 4.6 | 1.05 | CCC/CB/VDE | 185/188 | |
| ATA80X | 8.1 | ST/OC | RSIR | 230 | 785 | 174.2 | 1.35 | 4.6 | 1.05 | CCC/CB | 185/188 | |
| ATK72X | 7.2 | ST/OC | RSCR | 205 | 699 | 154.0 | 1.40 | 4.8 | 1.09 | CCC/CB/VDE/CE | 185/188 | |
| ATK80X | 8.1 | ST/OC | RSCR | 230 | 785 | 174.0 | 1.40 | 4.8 | 1.09 | CCC/CB | 185/188 | |
| ▲ATD50V | 5.0 | ST | RSIR | 140 | 478 | 105.2 | 1.25 | 4.3 | 0.98 | CCC/CB | 182 | |
| ATD66X | 6.6 | ST/OC | RSIR | 190 | 648 | 142.8 | 1.25 | 4.3 | 0.98 | CCC/CB | 182 | |
| △ATA50K | 5.0 | ST | RSIR | 144 | 491 | 108.9 | 1.35 | 4.6 | 1.05 | CCC/CB | 182/185 | |
| △ATA66K | 6.6 | ST | RSIR | 190 | 648 | 142.8 | 1.25 | 4.3 | 0.98 | CCC/CB | 182 | |
| ATA66K(OC) | 6.6 | OC | RSIR | 190 | 648 | 143.7 | 1.35 | 4.6 | 1.05 | CCC/CB | 188 | |
| ATA72K(OC) | 7.2 | OC | RSIR | 205 | 699 | 154.0 | 1.35 | 4.6 | 1.05 | CCC/CB | 188 | |
| ATK55 | 5.5 | ST | RSCR | 160 | 546 | 121.0 | 1.35 | 4.6 | 1.05 | CCC/CB | 185 | |
| ATK60 | 6.0 | ST | RSCR | 180 | 614 | 135.0 | 1.51 | 5.2 | 1.18 | CCC/CB/CE | 185 | |
| ATK66 | 6.6 | ST | RSCR | 192 | 655 | 144.0 | 1.55 | 5.3 | 1.21 | CCC/CB/CE | 185 | |

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ATA72X-220-240V_50HZ_R134A-1Télécharger



Picture5 Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 8T
AI QUAD CAMERA



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 8T
AI QUAD CAMERA



Mbsm.pro , GL80AF , ZEM, EGL80AF,
Compressors , Hermetic compressors,
220-230V 50/60Hz , 1/5HP , 1PH , HBP,
R134A

Category: Solutions, Tester ok
written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , GL80AF ,ZEM Compressors , Hermetic compressors, 220-230V 50/60Hz ,
1/5HP ,1PH , HBP, R134A

GD40AF 1/9 , GL45AF 1/8 , GL60AF. GL60AF, GL70AF , GL70ANa 1/5.,GL70AND.
, GL80AF 1/5.

| LBP | | | | | | | | | | | | | | | |
|------------------------------------|------|----|-------------|-----|-----|-----|------|--------|--------|------|----------------|-----|------|------|---|
| R134a 60 Hz | | | CECOMAF (W) | | | | | | ASHRAE | | R134a 60 Hz | | | | |
| | | | -35 | -30 | -25 | | -10 | -23.3 | | | | | | | |
| | | | | | W | COP | | kcal/h | COP | | | | | | |
| 200-220/220-230V 50/60Hz ~I | | | | | | | | | | | | | | | |
| GD30AG | 1/12 | S | 3.08 | 25 | 39 | 57 | 0.67 | 130 | 68 | 0.88 | C | 200 | 5.8 | RSIR | P |
| GD40AF | 1/10 | S | 4.03 | 35 | 54 | 77 | 0.70 | 171 | 91 | 0.91 | C | 200 | 6.8 | RSIR | P |
| GL99BL | 1/4 | OC | 9.93 | 102 | 148 | 204 | 0.93 | 434 | 239 | 1.21 | C | 470 | 11.3 | RSCR | P |
| GL45AF | 1/8 | S | 4.55 | 41 | 64 | 94 | 0.76 | 214 | 111 | 0.99 | C | 270 | 9.0 | RSIR | P |
| GL60AF | 1/6 | S | 5.99 | 66 | 94 | 131 | 0.81 | 286 | 154 | 1.05 | C | 270 | 9.1 | RSIR | P |
| GL70AF | 1/5 | S | 6.65 | 80 | 110 | 150 | 0.90 | 323 | 175 | 1.17 | C | 345 | 10.1 | RSIR | P |
| GL70ANa | 1/5 | S | 6.65 | 80 | 110 | 150 | 0.90 | 323 | 175 | 1.17 | C | 345 | 10.1 | RSIR | P |
| GL70ANb | 1/5 | OC | 6.65 | 80 | 110 | 150 | 0.90 | 323 | 175 | 1.17 | C | 445 | 10.4 | RSIR | P |
| GL80AF | 1/5 | S | 8.10 | 87 | 123 | 172 | 0.92 | 384 | 202 | 1.19 | C | 445 | 10.6 | RSIR | P |
| GL80ANa | 1/5 | S | 8.10 | 87 | 123 | 172 | 0.92 | 384 | 202 | 1.19 | C | 445 | 10.6 | RSIR | P |
| GL80ANb | 1/5 | OC | 8.10 | 87 | 123 | 172 | 0.92 | 384 | 202 | 1.19 | C | 445 | 10.7 | RSIR | P |
| GL90AF | 1/4 | S | 9.08 | 96 | 134 | 185 | 0.93 | 421 | 218 | 1.20 | C | 445 | 10.8 | RSIR | P |
| GL90ANa | 1/4 | S | 9.08 | 96 | 134 | 185 | 0.93 | 421 | 218 | 1.20 | C | 445 | 10.8 | RSIR | P |
| GL90ANb | 1/4 | OC | 9.08 | 96 | 134 | 185 | 0.93 | 420 | 218 | 1.20 | C | 445 | 10.9 | RSIR | P |
| 115V 60Hz ~I | | | | | | | | | | | | | | | |
| GD24AD | 1/20 | S | 2.42 | 14 | 25 | 40 | 0.52 | 99 | 48 | 0.70 | C | 200 | 5.1 | RSIR | P |
| GD36AD | 1/12 | S | 3.62 | 30 | 47 | 68 | 0.65 | 149 | 80 | 0.85 | C | 240 | 6.1 | RSIR | P |
| GL45ADa | 1/8 | S | 4.55 | 41 | 65 | 95 | 0.80 | 214 | 112 | 1.05 | C | 265 | 8.1 | RSIR | P |
| GL45ADb | 1/8 | S | 4.55 | 41 | 65 | 95 | 0.80 | 214 | 112 | 1.05 | C-V | 265 | 8.1 | CSIR | R |
| GL60ADa | 1/6 | S | 5.99 | 64 | 94 | 132 | 0.85 | 290 | 155 | 1.10 | C | 265 | 9.1 | RSIR | P |
| GL60ADb | 1/6 | S | 5.99 | 64 | 94 | 132 | 0.85 | 290 | 155 | 1.10 | C | 210 | 9.1 | CSIR | R |
| GL60BK | 1/6 | OC | 5.99 | 66 | 95 | 132 | 0.84 | 290 | 155 | 1.10 | C | 400 | 10.0 | RSCR | P |
| GL70ADa | 1/5 | S | 6.65 | 79 | 108 | 148 | 0.86 | 322 | 173 | 1.12 | C | 345 | 9.6 | RSIR | P |
| GL70ADb | 1/5 | S | 6.65 | 79 | 108 | 148 | 0.86 | 322 | 173 | 1.12 | C | 345 | 9.6 | CSIR | R |
| GL80ADa | 1/5 | S | 8.10 | 84 | 121 | 171 | 0.87 | 383 | 201 | 1.13 | C | 345 | 9.8 | RSIR | P |
| GL80ADb | 1/5 | S | 8.10 | 84 | 122 | 171 | 0.87 | 384 | 201 | 1.13 | C-V | 345 | 9.8 | CSIR | R |
| GL80BK | 1/5 | OC | 8.10 | 79 | 119 | 169 | 0.85 | 381 | 200 | 1.11 | C | 470 | 11.1 | RSCR | P |
| GL90ADa | 1/4 | S | 9.08 | 97 | 138 | 191 | 0.88 | 420 | 224 | 1.14 | C | 445 | 10.5 | RSIR | P |
| GL90ADb | 1/4 | S | 9.08 | 97 | 138 | 191 | 0.88 | 420 | 224 | 1.14 | C | 445 | 10.5 | CSIR | R |



ZMC

EGL80AF 0609

R 134 a



200-220V~50Hz

220-230V~60Hz

MADE IN EGYPT



3 445

0265983



| | | | | | kcal/h | W | W/W | W/W | W/W | W/W |
|----------------------------|------------------------|-----------|-----|----|--------|-----|-----|------|------|-----|
| ▶ <input type="checkbox"/> | GL45AA | LBP-R134a | 1/8 | 43 | A | 96 | 82 | 1.06 | 0.82 | |
| ▶ <input type="checkbox"/> | GL45AN | LBP-R134a | 1/8 | 50 | C | 96 | 81 | 1.05 | 0.8 | |
| ▶ <input type="checkbox"/> | GL60AA | LBP-R134a | 1/6 | 43 | A | 132 | 114 | 1.14 | 0.89 | |
| ▶ <input type="checkbox"/> | GL60AF | LBP-R134a | 1/6 | 43 | D | 132 | 113 | 1.07 | 0.82 | |
| ▶ <input type="checkbox"/> | GL60AH | LBP-R134a | 1/6 | 43 | A | 133 | 114 | 1.31 | 1.01 | |
| ▶ <input type="checkbox"/> | GL60AN | LBP-R134a | 1/6 | 50 | C | 132 | 114 | 1.07 | 0.83 | |
| ▶ <input type="checkbox"/> | GL70AA | LBP-R134a | 1/5 | 43 | A | 149 | 128 | 1.18 | 0.9 | |
| ▶ <input type="checkbox"/> | GL70AN | LBP-R134a | 1/5 | 50 | D | 150 | 129 | 1.08 | 0.83 | |
| ▶ <input type="checkbox"/> | GL70AT | LBP-R134a | 1/5 | 43 | E | 144 | 122 | 1.09 | 0.84 | |
| ▶ <input type="checkbox"/> | GL75AA | LBP-R134a | 1/5 | 43 | A | 155 | 133 | 1.18 | 0.92 | |
| ▶ <input type="checkbox"/> | GL80AA | LBP-R134a | 1/5 | 43 | A | 173 | 148 | 1.19 | 0.93 | |
| ▶ <input type="checkbox"/> | GL80AF | LBP-R134a | 1/5 | 43 | D | 166 | 141 | 1.14 | 0.88 | |
| ▶ <input type="checkbox"/> | GL80AH | LBP-R134a | 1/5 | 43 | A | 175 | 150 | 1.35 | 1.06 | |
| ▶ <input type="checkbox"/> | GL80AN | LBP-R134a | 1/4 | 43 | A | 196 | 168 | 1.36 | 1.06 | |
| ▶ <input type="checkbox"/> | GL90AA | LBP-R134a | 1/4 | 43 | A | 195 | 167 | 1.19 | 0.93 | |
| ▶ <input type="checkbox"/> | GL90AH | LBP-R134a | 1/4 | 43 | A | 215 | 182 | 1.39 | 1.08 | |
| ▶ <input type="checkbox"/> | GL90AN | LBP-R134a | 1/4 | 50 | D | 190 | 163 | 1.1 | 0.85 | |
| ▶ <input type="checkbox"/> | GL90AT | LBP-R134a | 1/4 | 43 | E | 190 | 163 | 1.18 | 0.87 | |



PictureS Mbsm Dot Pro : www.mbsm.pro



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Données techniques

- Modèle: **GL80AA**
- Gaz réfrigérant: **R-134a**
- Pression / température: **LBP**
- Puissance: **1/5 HP**
- Type de courant: **monophasé**
- Fréquence: **50 Hz**
- Type de compresseur: **hermétique**
- Déplacement: **8,10 cm³**
- Consommation d'énergie. Énergie -35 ° C: **117 W**
- Consommation d'énergie. Énergie -25°C: **158 W**
- Consommation d'énergie. Énergie -10 ° C: **237 W**
- T ° Condensation: **40 ° C**
- Capuchon de refroidissement. -35 ° C: **95 Kcal / h**
- Capuchon de refroidissement. -30 ° C: **132 Kcal / h**
- Capuchon de refroidissement. Énergie -25 ° C: **178 Kcal / h**
- Capuchon de refroidissement. -20 ° C: **234 Kcal / h**

- Capuchon de refroidissement. -15 ° C: **300 Kcal / h**
- Capuchon de refroidissement. Énergie -10 ° C: **375 Kcal / h**
- Type de test: **Ashare 32**

[Mbsm_dot_pro_private_PDF_GLy60aaTélécharger](#)

[Mbsm_dot_pro_private_PDF_GLy60aa-1Télécharger](#)

Mbsm.pro, GL 45 TB, GL 60 TB, GL 80 TB, GL 90 TB, GP 12 TB, GP 14 TB, GX 18 TB, GX 23 TB , Corps équerre, entrée 3/8" – sortie 1/2", longueur de tube capillaire 1.5m

Category: Solutions, Tester ok

written by Jamila | 12 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro, GL 45 TB, GL 60 TB, GL 80 TB, GL 90 TB, GP 12 TB, GP 14 TB, GX 18 TB, GX 23 TB , Corps équerre, entrée 3/8" – sortie 1/2", longueur de tube capillaire

1.5m



