

Congélateur, glacière, 180 à 280 litres, Compresseur LG MA57, 130 W, 1/6Hp, LBP, R134, 220-240V

Category: compressor, Non classé

written by www.mbsm.pro | 25 December 2020



Private Picture Copyright : WWW.MBSM.PRO

Application Réfrigérateur FF	MA57LBJG, MA57LHJG
Capacité	280 litres
Application Congélateur profond	MA57LBJG, MA57LHJG
Capacité	250 litres
Déplacement	5,7
Capacité de refroidissement	138 (kcal / h), 160 W, 548 (Btu / h), 0,215 HP
La puissance d'entrée	130 W
COP W / W	1.2
EER Btu / Wh	4,21
Type de moteur	RSIR-PTC
Dispositif de démarrage (PTC)	QP2-33MC1
Protecteur de moteur (OLP)	4TM232TFB
(Condensateur) Runnig / surtension	4uF / 400
(HUILE) Viscosité cst / Qté (cc)	22/220
Type de refroidissement	ST
Hauteur du compresseur	177 mm
Poids net	9,1 kg.

- Type de compresseur: LBP
- Consommation électrique: 130 W
- Capacité du réfrigérateur: 280 litres.
- Capacité du congélateur: 250 litres.
- Alimentation / fréquence: 220V / 50Hz

Le compresseur de réfrigérateur LG est un mini compresseur d'air courant, qui offre une solution de refroidissement complète pour les réfrigérateurs et les armoires de rangement à usage domestique et professionnel. Les compresseurs d'air LG pour réfrigérateur offrent un fonctionnement compact et silencieux, avec le couple le plus élevé (HST). Ce compresseur d'air garantit une qualité 6s et une fiabilité éprouvée dans le monde entier.

R134a

Modèle	Application	PIÈCES ÉLECTRIQUES				PÉTROLE			Type de refroidissement
		Tension V	Fréquence hz	Type de moteur	Appareil de démarriage	Condensateur ProtecteurDépart	Viscosité (cst)	Qté	
NS30LBJG				RSIR	P470MC	4TM213SFB	22	180	ST
NS36LBJG				RSIR	P470MC	4TM213SFB	22	180	ST
MA53LAJG		220	50	RSIR	P330MC	4TM222VFB	dix	220	ST
MA57LAJG				RSIR	P470MC	4TM213SFB	dix	220	ST
NS24LADG				RSIR	P220MC	4TM101RFB	22	180	ST
NS36LADG				RSIR	P220MC	4TM174TFB	22	180	ST
NS36LADG		220	60	RSCR	P220MD	4TM174TFB	4/400	22	180
MA53LADG				RSIR	P330MC	4TM232NFB	dix	220	ST
MA53LADM				RSCR	P330MD	4TM232NFB	5/400	dix	220
MA57LADM				RSCR	P330MD	4TM213SFB	5/400	dix	220
NS24LABG				RSIR	P330MC	4TM149NFB	22	180	ST
NS30LABG				RSIR	P220MC	4TM158RFB	22	180	ST
NS36LABG		220	50-60	RSIR	P220MC	4TM174TFB	22	180	ST
MA53LABM				RSCR	P330MD	4TM232NFB	5/400	dix	220
MA57LABM				RSCR	P330MD	4TM213SFB	5/400	dix	220
NS24LAEG				RSIR	P220MC	4TM117SFB	22	180	ST
NS24LBEG				RSIR	P330MC	4TM117SFB	22	180	ST
NS30LAEG				RSIR	P330MC	4TM149NFB	22	180	ST
MSA30LAEG				RSIR	P330MC	4TM149NFB	22	180	ST
NS36LAEG				RSIR	P220MC	4TM149NFB	22	180	ST
MSA43LBEGLB				RSIR	P330MC	4TM166RFB	22	180	ST
MSA43LAEM				RSCR	P330MD	4TM205RFB	4/400	22	180
MA53LAEC				RSIR	P330MC	4TM158RFB	dix	220	ST
MA53LAEM				RSCR	P330MD	4TM232TFB	5/400	dix	220
MSB53LAJG				RSIR	P330MC	4TM213SFB	dix	180	ST
MA57LAEG				RSIR	P330MC	4TM158RFB	dix	220	ST
MA57LAEM				RSCR	P330MD	4TM205RFB	5/400	dix	220
MA57LBEG				RSIR	P330MC	4TM149NFB	dix	200	ST
MC57LAEM		220-240	50	RSCR	P330MD	4TM166RFB	4/400	sept	200
MSB57LAEG				RSIR	P330MC	4TM166RFB	dix	180	ST
MSB57LAEM				RSCR	P330MC	4TM166RFB	4/400	dix	180
MA62LCEG				RSIR	P330MC	4TM232VFB	dix	220	ST
MA62LCEM				RSCR	P330MD	4TM205RFB	5/400	dix	220
MA62LDEG				RSIR	P330MC	4TM232VFB	dix	220	ST
MA69LDEG				RSIR	P330MC	4TM232VFB	dix	220	ST
MA69LCEG				RSIR	P330MC	4TM232VFB	dix	220	ST
MA69LCEM				RSCR	P330MD	4TM232NFB	4/400	dix	220
MA98LAEM				RSCR	P470MD	4TM265RFB	4/400	dix	220
MC98LAEM				RSCR	P470MD	4TM265RFB	5/400	dix	220
MQ98LAEM				RSCR	P470MB	4TM265RFB	5/400	dix	220
MA108LAEH				RSE	P470MB	4TM276VFB	30/300	5/400	dix



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_LG_Refrigerator_Compressor_CatalogueTélécharger

Compressor, Daewoo, Hf127Ye-5-k,
134a, RSIR, LBP, 1/3HP, Ye série,
220-240V 50hz, 287 w


Category: compressor

written by www.mbsm.pro | 25 December 2020



H E L 23 YG - 3 B
 ① ② ③ ④ ⑤ ⑥ ⑦

NO	CONTENTS	
①	Refrigerant	H : R134a I : R600a No marking : R12
②	Motor type	PTC
		C-relay
	100V Series	F : RSIR E : RSCR C : CSIR B : CSR
	220V Series	S : RSIR P : RSCR K : CSIR D : CSR
100V Series	R : RSIR N : CSIR	
220V Series	T : RSIR G : CSIR	
③	Application	L : L B P H : H B P
④	Grade of Cooling Capacity	(reference : table of capacity range)
⑤	Series name	JE Y YE YH YG
⑥	Voltage & Frequency	No marking : 100V 50/60Hz
		1 : 110-115V 60Hz
		2 : 127V 60Hz
		3 : 110V 60Hz
		4 : 220V 60Hz
5 : 220-240V 50Hz		
6 : 115-127V 60Hz		
7 : 115-127V 60Hz		
8 : 220-240V 50Hz / 220V 60Hz		
9 : 110V 50Hz		
⑦	Improvedata order	

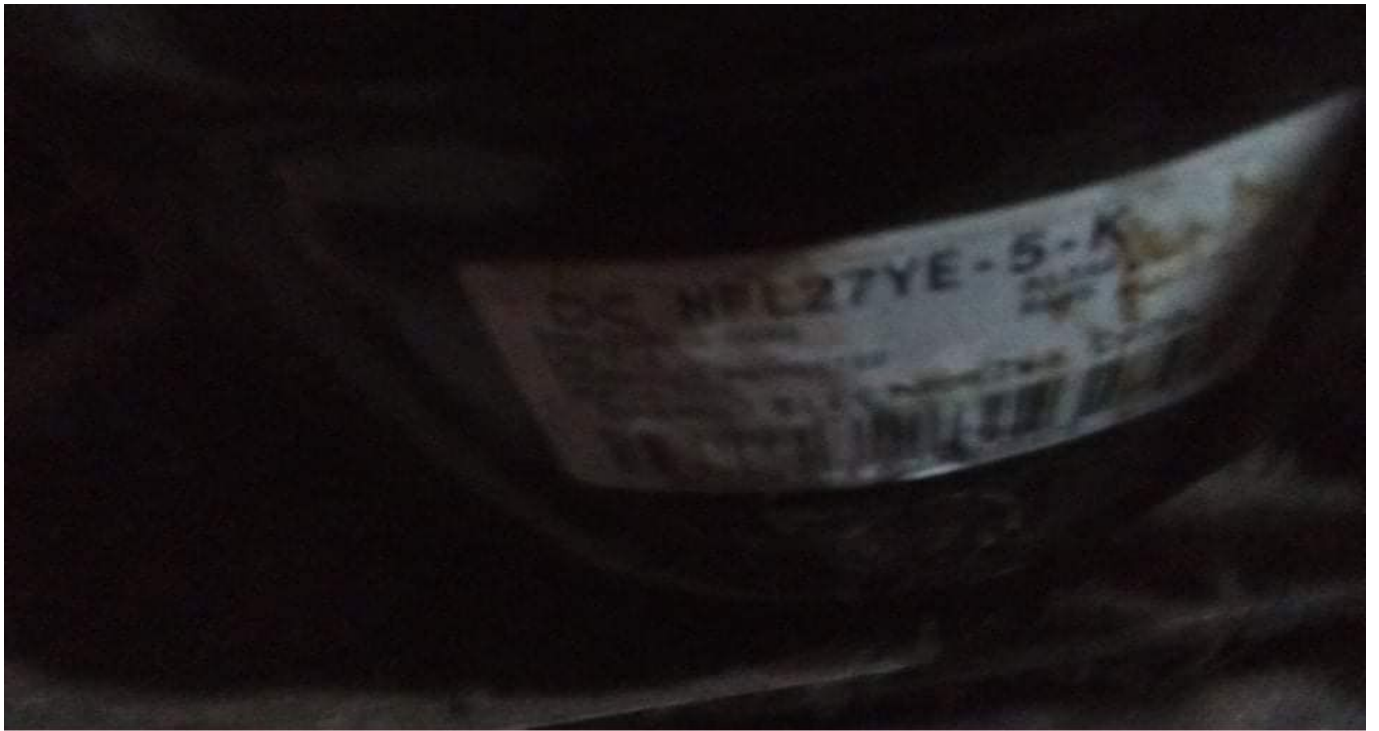

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF__Hfl27YeTélécharger

Mbsm_dot_pro_private_PDF_Hfl27YeTélécharger

Mbsm_dot_pro_private_PDF_Mbsm_dot_pro_private_PDFdocument-Hfl27YeTélécharger

Mbsm_dot_pro_private_PDF_R134a-LBP-Hfl27YeTélécharger

Mbsm_dot_pro_private_PDFMbsm_dot_pro_private_PDFdocument-Hfl27YeTélécharger

ASPERA, COMPRESSEUR, 1 / 3HP++ (Big), NE6181E, CSIR, HMBP, R22, 220-240V

Category: compressor

written by www.mbsm.pro | 25 December 2020



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

NE6181E 1 / 3HP / R22

- *Détails techniques*

puissance 1/3 CV, cylindrée 7,28 cm³
220 / 240V 50Hz

- LIGNE LIQUIDE (DIAMÈTRE) : 1/4
- LIGNE D'ASPIRATION (DIAMÈTRE) : 5/16
- BRÈVE DESCRIPTION



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NE6181ETélécharger

1/5HP, Refrigerator, Samsung,
Compressor, R134A, 220-240V, SD162Q-
L1UA, PTC-RSCR, 6.16CC

Category: compressor

written by www.mbsm.pro | 25 December 2020



Picture Copyright: WWW.MBSM.PRO



Picture Copyright: WWW.MBSM.PRO

Model No.: SD162Q-L1UA

Test condition: ASHARE

Evaporating Temperature: -23.3° C

Condensing Temperature: 54.4° C

Displacement: 6.16CC/ Rev

Oil: 180CC

Motor type: PTC-RSCR

Nominal voltage range: 187V~276V at 50Hz

Characteristics:

1. Strong load capacity
2. High efficiency & reliability
3. Reliable starting performance
4. Low noise

v id="StyleTableProd">

[Mbsm_dot_pro_private_PDF_qdoc.tips_catalogo-compresores-samsungpdfTélécharger](#)



RATED VOLTAGE	MODEL	VOLTAGE VOLT-HZ	MOTOR TYPE	DISPL. (cc)	HEIGHT (mm)	ASHRAE			EFFICIENCY (-23.3 °C)			COOLING TYPE	
						COOLING CAPACITY -23.3 °C			POWER INPUT W	EFF	COP		EER
						Kcal/Hr	Watt	BTU/Hr					
AC 110V/50-60Hz	CD124E-L1Z2	100-50	RSIR	2.40	157	43	50	171	68	0.63	0.74	2.51	ST
		100-60				52	60	206	68	0.76	0.89	3.04	
	CD130E-L1Z2	100-50	RSIR	2.93	157	58	67	230	76	0.76	0.89	3.03	ST
		100-60				70	81	278	79	0.89	1.03	3.52	
	SD137E-L1U2	100-50	RSCR	3.71	166	72	84	286	91	0.79	0.92	3.14	ST
	SD152E-L1W2	100-50	CSR	5.21	171	87	101	345	99	0.88	1.02	3.49	ST
		100-60				117	136	454	111	1.05	1.23	4.18	
	SD162E-L1W2	100-50	CSR	6.16	175	135	157	536	121	1.12	1.30	4.43	ST
		100-60				144	168	572	141	1.02	1.19	4.06	
	DD137-L1U2	100-50	RSCR	3.71	166	80	93	317	85	0.94	1.09	3.73	ST
		100-60				96	111	380	99	0.97	1.12	3.84	
	MD152E-L1U2	100-50	RSCR	5.21	171	118	137	468	103	1.15	1.33	4.55	ST
		100-60				143	166	568	118	1.21	1.41	4.81	
	MD162E-L1U2	100-50	RSCR	6.16	175	143	166	568	116	1.23	1.43	4.89	ST
		100-60				182	212	723	141	1.29	1.50	5.12	
	SK170E-L2W	100-50	CSR	6.99	189	168	195	667	149	1.13	1.21	4.48	FC
		100-60				206	240	818	170	1.21	1.41	4.81	
	SK182E-L2W	100-50	CSR	8.19	189	203	236	806	188	1.08	1.26	4.29	FC
		100-60				239	278	950	196	1.22	1.42	4.85	
	DK182E-L2U	100-50	RSCR	8.19	189	203	236	806	161	1.26	1.47	5.01	FC
		100-60				256	298	1016	191	1.34	1.56	5.32	
	DK190E-L2U	100-50	RSCR	9.07	189	239	267	913	190	1.28	1.49	5.07	FC
		100-60				280	326	1112	209	1.34	1.56	5.32	
	MK172E-L2U	100-50	RSCR	7.21	189	181	210	719	140	1.29	1.50	5.13	ST
100-60		226				263	897	162	1.40	1.62	5.54		

Samsung compressors are imported in Europe by: Procold S.r.l. - Italy
www.samsung-compressors.com www.procold.it

Private Picture Copyright: WWW.MBSM.PRO

1/5HP Refrigerator Compressor R134A 220-240V



Price : **US \$ 28/ Piece**
Payment Terms : **L/C, T/T, Western Union**
Trade Terms : **FOB**
Production Capacity : **6, 000, 000PCS/ Year**
Packing Details : **by Pallet**
Refrigerant Gas : **R134A**
Main Markets : **Global**
Place of Origin : **china**
Category : **Refrigerators**



Private Picture Copyright: WWW.MBSM.PRO

Model No.: SD162Q-L1UA
 Test condition: ASHARE
 Evaporating Temperature: -23.3° C
 Condensing Temperature: 54.4° C
 Displacement: 6.16CC/ Rev
 Oil: 180CC
 Motor type: PTC-RSCR
 Nominal voltage range: 187V~276V at 50Hz

Characteristics:

1. Strong load capacity
2. High efficiency & reliability
3. Reliable starting performance
4. Low noise

v id="StyleTableProd">



Private Picture Copyright : WWW.MBSM.PRO

Rated voltage	Item No.	Description	ASHARE					Cooling Type	Motor Type
			Capacity at 50Hz		COP (W/W) at 50Hz	Current (A) at 50Hz	Power Input (W)		
			W	Btu					
AC 220-240V/ 50Hz	MSA141Q-S1A	Refrigerator Compressor R134a LBP	122	416	1.27	0.67	96	Static	PTC-RSIR
	MSA143Q-S1Z		112	381	1.34	0.69	83	Static	PTC-RSIR
	SD151Q-L1UB		140	478	1.27	0.52	110	Static	RSCR
	SD162Q-L1UA		170	580	1.36	0.59	125	Static	PTC-RSCR
	MSA170Q-L1B		201	686	1.56	0.63	129	Static	RSCR
AC 200- 220V/ 50Hz or 220V/ 60Hz	SD152H-S1UB	Refrigerator Compressor R134a LBP	134	457	1.17	0.66	114	Static	RSCR
	SD162H-L1UB		170	580	1.22	0.82	139	Static	PTC-RSCR
	MSA170H-L1B		201	686	1.43	0.87	141	Static	RSCR



Private Picture Copyright : WWW.MBSM.PRO



1) Compressor model identification

NUMBER	MEANING
① Series	CD, SD, MD, SK, MK, HK, MSS, MSA, MSE, ENV, MKV, MSV
② Refrigerant	1 : R 134a (LBP) 4 : R 600a (LBP) 6 : R 134a (HBP)
③ Displacement (cc/Rev.) x 10	24 : 2.40cc, 30 : 2.93cc, 37 : 3.71cc, 43 : 4.38cc, 50 : 5.21cc, 51 : 5.12cc, 52 : 5.21cc, 60 : 6.16cc, 62 : 6.16cc, 70 : 6.99cc, 72 : 7.21cc, 80 : 8.19cc, 82 : 8.19cc, 83 : 8.19cc, 88 : 8.80cc, 90 : 9.07cc, A1 : 10.68cc, A2 : 12.13cc, A3 : 12.52cc, A5 : 15.32cc
④ Rated voltage and frequency	B : 220V ~ 60Hz C : 115V ~ 60Hz D : 115-127V ~ 60Hz E : 100V ~ 50/60Hz G : 220-240V ~ 50Hz, 220V ~ 60Hz H : 200-220V ~ 50Hz, 220V ~ 60Hz K : 200-220V ~ 50Hz P : 127V ~ 60Hz Q : 220-240V ~ 50Hz A : variable for BLDC
⑤ Application	L/R/S : Low Back Pressure H : High Back Pressure
⑥ Cooling type	0 : Oil cooling 1 : Static 2 : Fan cooling
⑦ Motor type	B/C/X : BLDC S : PTC or Current-CSIR U : PTC-RSCR (Optional RSIR) W : PTC-CSR Y : Current-RSIR Z : PTC-RSIR
⑧ Option	

Private Picture Copyright : WWW.MBSM.PRO

AC 220-240V-50Hz, 220V-60Hz	MSS151G-L1U	RSCR	220-50	129	145	496	90	1.39	1.61	5.51	ST
			220-60	152	177	603	107	1.42	1.65	5.64	
	MSA151G-L1B	RSCR	220-50	125	145	496	96	1.30	1.51	5.17	ST
			220-60	152	177	603	114	1.33	1.55	5.29	
	MSA162G-L1B	RSCR	220-50	151	176	599	119	1.27	1.48	5.04	ST
			220-60	187	217	742	140	1.34	1.55	5.30	
	MSS170G-L1U	RSCR	220-50	178	207	707	124	1.44	1.67	5.70	ST
220-60			222	258	881	151	1.47	1.71	5.84		
MK183G-L2U	RSCR	220-50	203	236	806	149	1.36	1.58	5.41	FC	
		220-60	258	300	1024	179	1.44	1.68	5.72		
MK190G-L2U	RSCR	220-50	225	262	893	168	1.34	1.56	5.32	FC	
		220-60	285	331	1131	200	1.43	1.66	5.66		
AC 220-240V-50Hz	CD124Q-L1Z2	RSIR	220-50	43	50	171	57	0.75	0.88	2.99	ST
	CD130Q-L1Z2	RSIR	220-50	58	67	230	65	0.89	1.04	3.54	ST
	CD130Q-S1Z	RSIR	220-50	58	67	230	74	0.78	0.91	3.11	ST
	CD137Q-S1U2	RSCR	220-50	72	84	286	80	0.90	1.05	3.57	ST
	SD137Q-L1ZB	RSIR	220-50	75	87	298	86	0.87	1.01	3.46	ST
	SD137Q-L1UB	RSCR	220-50	75	87	298	80	0.94	1.09	3.72	ST
	SD143Q-L1U2	RSCR	220-50	95	110	377	99	0.96	1.12	3.81	ST
	MSA143Q-S1Z	RSIR	220-50	96	112	381	83	1.16	1.34	4.59	ST
	SD152Q-L1UB	RSCR	220-50	120	140	476	104	1.15	1.34	4.58	ST
	MD152Q-L1U2	RSCR	220-50	118	137	468	98	1.20	1.40	4.78	ST
	SD162Q-L1UB	RSCR	220-50	146	170	580	125	1.17	1.36	4.64	ST

8

Private Picture Copyright : WWW.MBSM.PRO

R134a, Hitachi, Compressor, (R012-Series), FL06s34-tab, FL0739-SQ, FL0847-SD, FL1152-SB, FL1257-SR, FL14S62-TAD, FL1568-SQ, FL20S88-TAC, FL1888-SE, CL0545-SZ, CL1297-SA, CL1310-SA, CL1588-DZ, CL1610-DL

Category: compressor

written by www.mbsm.pro | 25 December 2020

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO

R134a, Hitachi, Compressor, (R012-Series), FL06s34-tab, FL0739-SQ, FL0847-SD, FL1152-SB, FL1257-SR, FL14S62-TAD, FL1568-SQ, FL20S88-TAC, FL1888-SE, CL0545-SZ, CL1297-SA, CL1310-SA, CL1588-DZ, CL1610-DL

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO



FLO6S34

85 Watts

R134a

220V

FREEZING

HITACHI
Compressor

LBP

RECIPROCATING COMPRESSOR

COOLING

1/12HP 220V

SATISFACTION 100% GUARANTEE

CE UIC CB RoHS

Private Picture Copyright : WWW.MBSM.PRO

The advertisement features a central image of a black Hitachi reciprocating compressor. The background is split into a light blue 'FREEZING' section on the left and a white 'COOLING' section on the right. The 'FREEZING' section includes icons of a refrigerator and a freezer. The 'COOLING' section includes icons of a refrigerator, a milk carton, and various fruits. A 'Satisfaction 100% Guarantee' seal is located in the bottom right corner of the compressor image. The product name 'FLO6S34' is in a red box, while other specifications are in blue boxes. The Hitachi logo and 'Compressor' text are in the top right. The 'RECIPROCATING COMPRESSOR' text is in a red box at the bottom left. The '1/12HP 220V' text is in a red box at the bottom right. The 'Satisfaction 100% Guarantee' seal is a gold and black circular seal. The 'Private Picture Copyright' text is at the very bottom.

Relais, démarrage, klixon, compresseur, réfrigérateur, ZEM A2P9 A6D8 8100 , Branchement, Compressor CSR avec Condensateur 5Mic

Category: compressor

written by www.mbsm.pro | 25 December 2020




Private Picture Copyright : WWW.MBSM.PRO

Relais, démarrage, klaxon, compresseur, réfrigérateur, ZEM A6D8 8100 ,
Branchement, Compressor CSR avec Condensateur 5Mic

PRISE INDUSTRIELLE, Prise Triphasé, IP44, 3Pôles+Neutre+Terre, 5 Pôles

Category: electricity

written by www.mbsm.pro | 25 December 2020

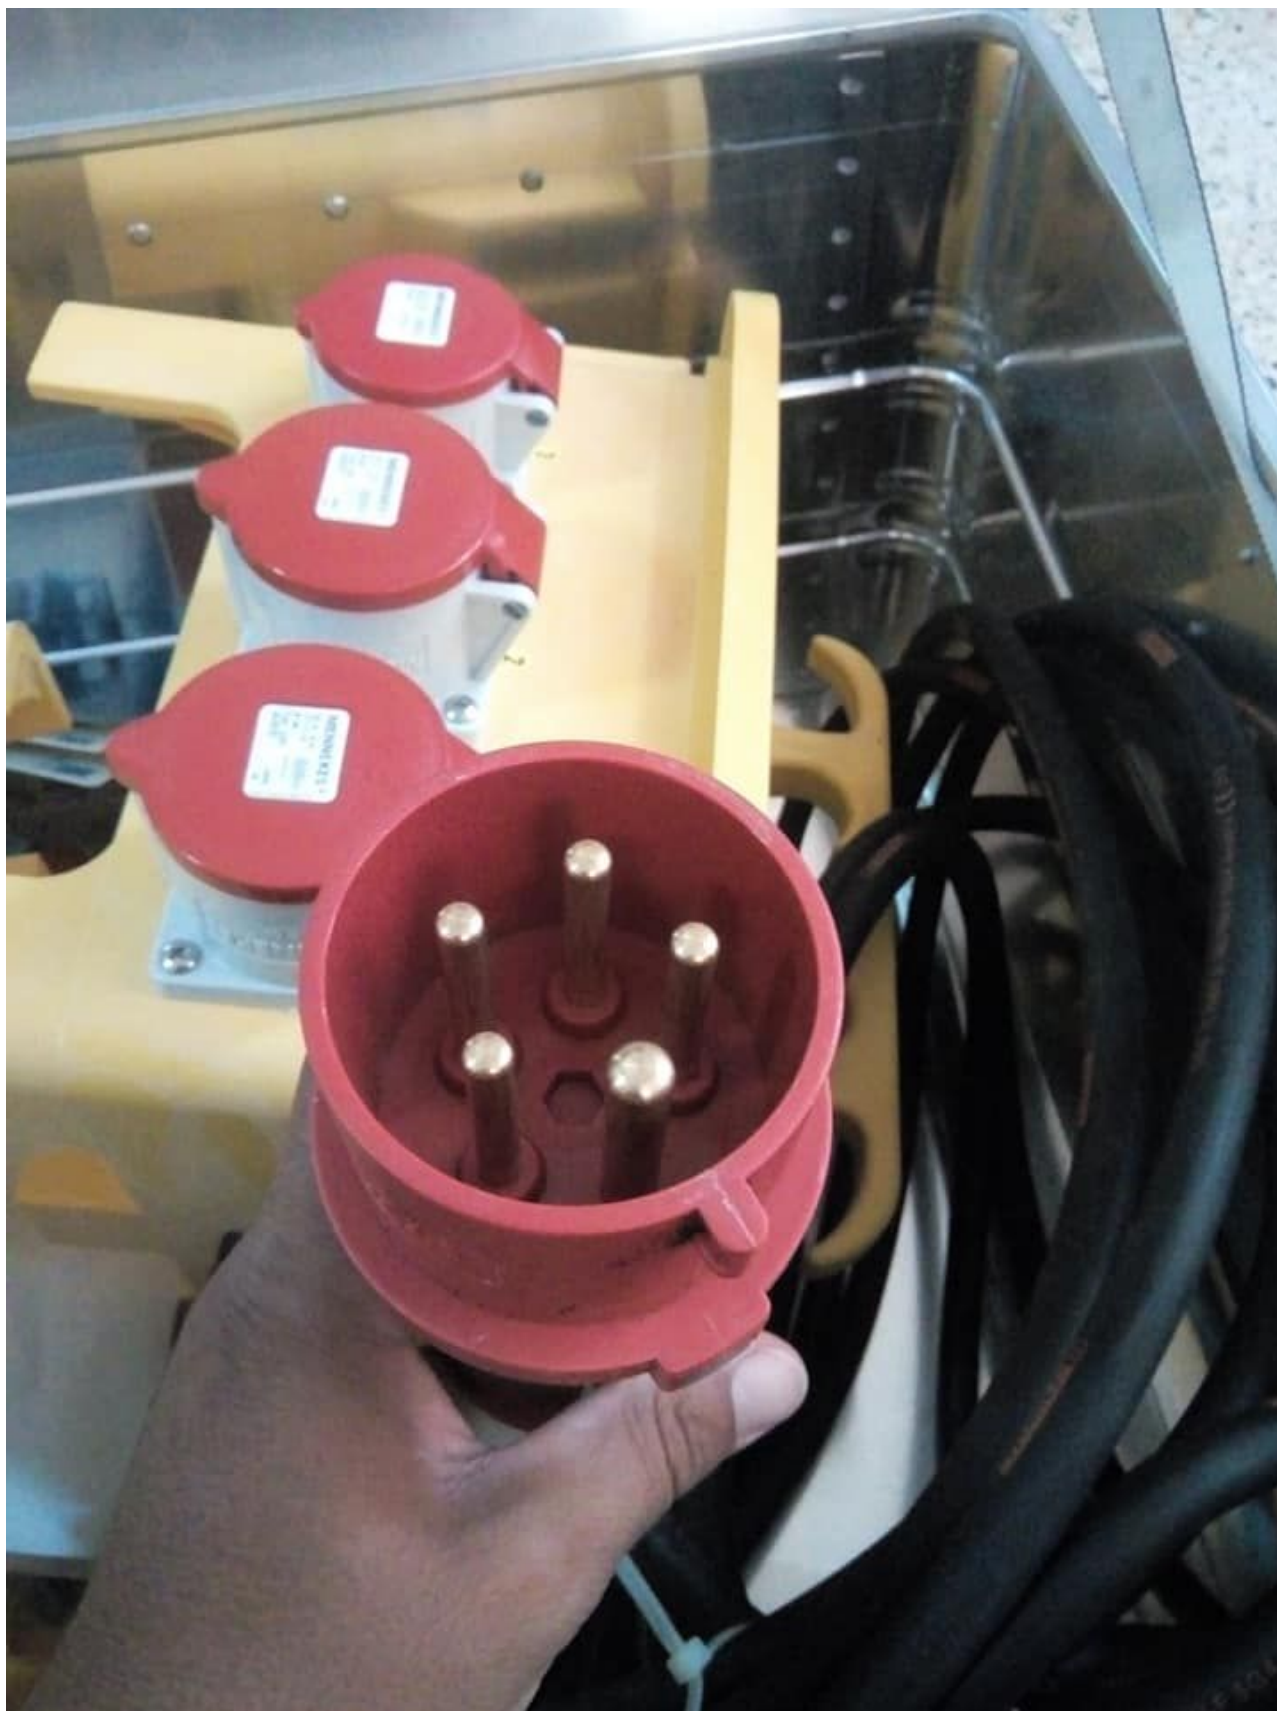

Private Picture Copyright : WWW.MBSM.PRO

PRISE INDUSTRIELLE, Prise Triphasé, IP44, 3Pôles+Neutre+Terre, 5 Pôles

QB77C16GPX5 ,RSIR, Reciprocating Compressors , R134a, LBP ,202 w ,1/4 Hp ,Q Series ,Reciprocating Fixed Speed ,Panasonic

Category: Technologie,Tester ok
written by www.mbsm.pro | 25 December 2020




Private Picture Copyright : WWW.MBSM.PRO

QB77C16GPX5 ,RSIR, Reciprocating Compressors , R134a, LBP ,202 w ,1/4 Hp ,R134a ,Q Series ,Reciprocating Fixed Speed

Minisplit Climatiseur , Mirage, Galanz , Carte Mère CE-KFR48G

Category: Solutions,Technologie
written by www.mbsm.pro | 25 December 2020

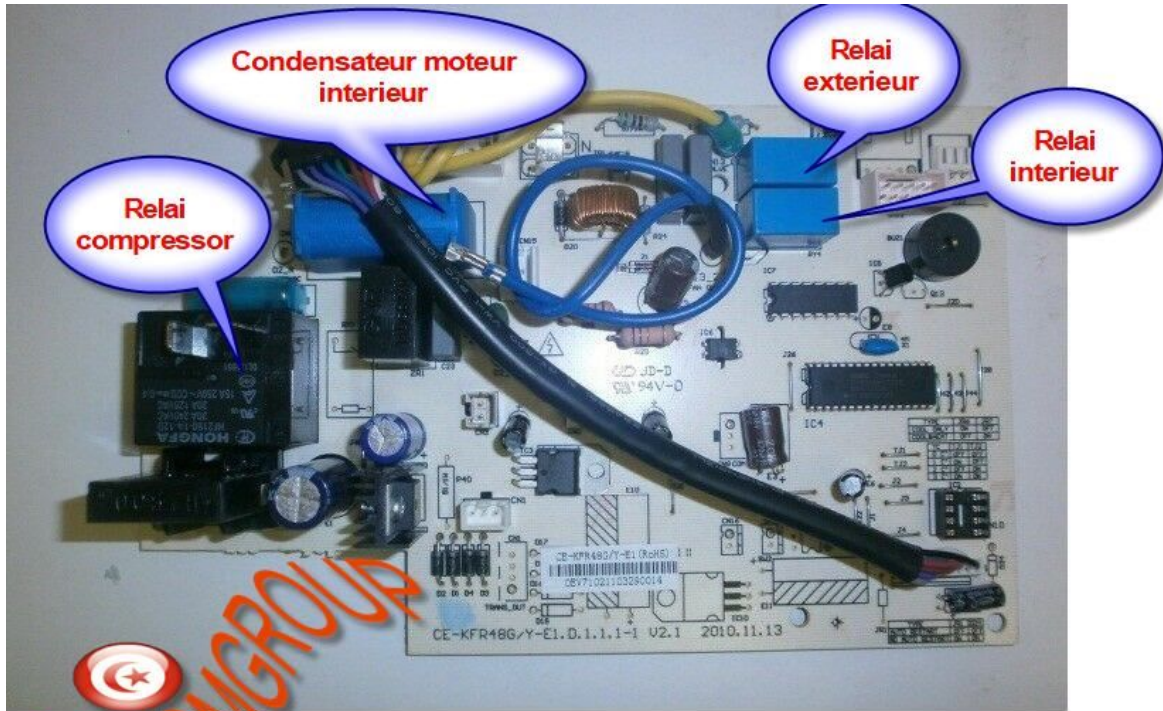

Private Picture Copyright: WWW.MBSM.PRO

Minisplit Climatiseur , Mirage, Galanz , Carte Mère CE-KFR48G

HuaJun , QD30 , Compressor, 90W , R12 ,
0.82 LRA , 220V 50Hz , 1/8HP

Category: Technologie, Tester ok
written by www.mbsm.pro | 25 December 2020



H QD30  
~220V 50Hz 0.82A 90W
R12 NO: 2004081879
温州华威电器公司压缩机厂

HuaJun ,QD30 ,Compressor, 90W , R12 , 0.82 LRA , 220V 50H , 1/8HP