

Compresseur, Hermétique, AE4456Y,
Tecumseh, R-134a, 3/8HP, 230V,
ae8069br, ae4456y-fz1c

Category: compressor

written by www.mbsm.pro | 26 December 2020



Private Picture Copyright : WWW.MBSM.PRO

Compresseur, Hermétique, AE4456Y, Tecumseh, R-134a, 3/8HP, 230V, ae8069br, ae4456y-fz1c

ELECTROLUX, CUBIGEL, Compresseur, GL90TB, R-134a, 1 / 4HP++ (big), 230V, RSCR, HMBP

Category: compressor

written by www.mbsm.pro | 26 December 2020



Private Picture Copyright : WWW.MBSM.PRO

 **Electrolux**
COMPRESSORS

GL90BH 03011
220 - 240 V ~ 50 Hz

R134a



 7625
0008146

Compressor ELECTROLUX \ CUBIGEL GL90TB

Substitutes for this compressor are: [Aspera NEK6170Z](#) , Danfoss/Secop FR10G , L'Unite Hermetique/Tecumseh AE4430Y

Refrigerant	R134A
Working range [C]	-25 to +10
Power supply	220V 50Hz
Engine type	CSIR
Power [HP]	1/4
Cylinder capacity [cm³]	8,9
Weight [kg]	10,8

Refrigerant: R134A



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Type: Compresseurs à pistons hermétiques

Producteur: ACC

Série: HMBP

Modèle: GL90BH

Données GENERALES

Réfrigérant: R134a
Élément de décharge: C
Refroidissement: 0C
Température ambiante maximale [°C]: 43

Données du compresseur

Cylindrée [cm³]: 9,1
Déplacement [m³ / h]: 1,6
Poids [kg]: 11,1
Charge d'huile [cm³]: 470
Type d'huile: ISO VG 19 ESTER

Données du moteur

Type de moteur: RSCR
Puissance [KM]: 1/4
Élément de départ: LST
Source de courant: 220V 50Hz
Gamme de tension: 187-264
Courant rotor bloqué [A]: 13,8
Résistance d'enroulement en marche (25 ° C) [Ω]: 8,97
Résistance d'enroulement de démarrage (25 ° C) [Ω]: 18,05

Données électriques

Relais: 3003
Élément de blindage:
Volume du condensateur de démarrage [µF]: 6/400

Connexions

	millimètres	pouces
Le tube d'aspiration:	6,5	
Tube de service:	6,5	
Tube de décharge:	4,9	
Tube de refroidisseur d'huile:		4,9

[Mbsm_dot_pro_private_PDF_Cubigel_Brochure_-320102MTélécharger](#)

[Mbsm_dot_pro_private_PDF_compresseur-acc-cubigell-gl90tbTélécharger](#)

Capacité de refroidissement [W]

t _c \ t _e	-35	-30	-25	-20	-15	-dix
40	114	162	218	282	355	435
45	104	148	200	261	330	407
50	93	134	183	240	305	379
55	82	119	165	219	281	351

60 72 105 147 198 256 323

Puissance absorbée [W]

$t_c \setminus t_e$	-35	-30	-25	-20	-15	-dix
40	123	145	167	189	212	235
45	122	145	168	192	216	240
50	121	145	170	195	220	245
55	120	145	171	197	223	250
60	119	146	173	200	227	255

Actuel [A]

$t_c \setminus t_e$	-35	-30	-25	-20	-15	-dix
40	0,64	0,75	0,85	0,95	1,05	1,14
45	0,63	0,74	0,86	0,96	1,06	1,16
50	0,62	0,74	0,86	0,97	1,08	1,18
55	0,61	0,74	0,86	0,98	1,09	1,20
60	0,60	0,73	0,86	0,99	1,10	1,22

Débit massique [kg / s]

$t_c \setminus t_e$	-35	-30	-25	-20	-15	-dix
40	0,55	0,85	1,23	1,68	2,20	2,80
45	0,48	0,77	1,14	1,58	2,09	2,67
50	0,41	0,69	1,04	1,47	1,97	2,54
55	0,34	0,61	0,95	1,36	1,85	2,41
60	0,27	0,52	0,86	1,26	1,73	2,28

COP [W / W]

$t_c \setminus t_e$	-35	-30	-25	-20	-15	-dix
40	0,93	1,12	1,31	1,49	1,67	1,85
45	0,85	1,02	1,19	1,36	1,53	1,70
50	0,77	0,92	1,08	1,23	1,39	1,55
55	0,69	0,82	0,96	1,11	1,26	1,40
60	0,60	0,72	0,85	0,99	1,13	1,26

Conditions de fonctionnement: ASHRAE

t_c – Température de condensation [°C]

t_e – Température d'évaporation [°C]

[Mbsm_dot_pro_private_PDFGL90BHTélécharger](#)

[Mbsm_dot_pro_private_PDF__GL90BHTélécharger](#)

[Mbsm_dot_pro_private_PDF_danfoss_GL90TG_R134a_230_60](#)

Compressors ZMC, EGL70AT, 1/5Hp, 1Ph,

GL70AT, R-134a, standard Efficiency,
220-240V 50Hz, Cubigel Compressor,
Cubigel, RSIR, LBP – LST – S, no
Starting capacitor

Category: compressor

written by www.mbsm.pro | 26 December 2020



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

G L Y 60 R A a

Indicates refrigerant.

G = R134a **N** = R290
M = R404A/R507 **H** = R600a

Indicates compressor range (overall design).

L = 4.5 - 10.7cm³ **X** = 16.0 - 23.0cm³
U = 4.5 - 8.9cm³ **P** = 12.0 - 18.0cm³ **S** = 18.0 - 38.0cm³

Indicates energy efficiency level. Not appearing in case of Standard efficiency.

Blank = Standard Efficiency **T** = Top Efficiency - Run Capacitor
C = Enhance Efficiency **RSCR** or **CSR**
M = Medium **S** = Super Efficiency - Run Capacitor
Y = High Efficiency - Run Capacitor Optional **RSIR/RSCR** or **CSIR/CSR**
Optional **RSIR/RSCR** or **CSIR/CSR**

Indicates approximate compressor displacement under the following rule:

U / L ranges 10 times the approx. displacement in cm³/rev (GL90TB -> approx 9 cm³/rev)
P / X / S ranges The approx. displacement in cm³/rev (MX21TG -> approx 21 cm³/rev)

Indicates the starting torque, application type and compressor cooling:

A = LBP - LST - S **L** = LBP - HST - Fan (Current Relay) **R** = HMBP - HST - FAN
C = LBP - LST - FAN **M** = HMBP - LST/HST - S/FAN (CSR versions with Current Relay)
D = LBP - HST - S **N** = LMBP - LST/HST - S/FAN **T** = HMBP - HST - FAN
F = LBP - HST - FAN **P** = HMBP - LST - FAN (CSR versions with Potential Relay)

Indicates the rated voltage:

A = **220-240V 50Hz** **G** = 200-220V 50Hz / 220-230V 60Hz
B = 220-240V 50Hz (standard efficiency) **J** = 100V 50/60Hz
C = 220-240V 50Hz (standard efficiency) **N** = 200-220V 50Hz or 200-240V 50Hz /



Private Picture Copyright : WWW.MBSM.PRO

GD40AA	4.06	1/10	LBP	S	220-240V 50Hz ~1	RSIR	P	C	34	50	70	0.77	155	82	1.00	6.1	Dd
GD40AF	4.06	1/10	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	31	47	66	0.67	147	78	0.88	6.8	Dd
GLY45AAa	4.56	1/8	LBP	S	220-240V 50Hz ~1	RSIR	P	C	47	65	89	1.01	192	104	1.30	8.7	Lb
GLY45AAb	4.56	1/8	LBP	S	220-240V 50Hz ~1	RSCR	P	C	48	66	90	1.05	193	105	1.36	8.7	Lb
GL45AAa	4.56	1/8	LBP	S	220-240V 50Hz ~1	RSIR	P	C	37	57	81	0.81	184	96	1.06	7.9	Lb
GL45AAb	4.56	1/8	LBP	S	220-240V 50Hz ~1	CSIR	R	C-V	37	57	81	0.81	184	96	1.06	7.9	Lb
GL45AF	4.56	1/8	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	36	56	80	0.74	184	95	0.97	8.4	Lb
GL45AAa	4.56	1/8	LBP	S	200-240/220-230V 50/60Hz ~1	RSIR	P	C	36	56	80	0.78	184	95	1.03	8.4	Lb
GLY55AAa	5.46	1/7	LBP	S	220-240V 50Hz ~1	RSIR	P	C	53	78	108	1.03	238	127	1.33	8.7	Lb
GLY55AAb	5.46	1/7	LBP	S	220-240V 50Hz ~1	RSCR	P	C	54	78	109	1.09	239	128	1.40	8.7	Lb
GLY60AAa	5.98	1/6	LBP	S	220-240V 50Hz ~1	RSIR	P	C	58	85	119	1.03	255	139	1.34	8.7	Lb
GLY60AAb	5.98	1/6	LBP	S	220-240V 50Hz ~1	RSCR	P	C	58	86	120	1.10	256	140	1.42	8.7	Lb
GL60AAa	5.98	1/6	LBP	S	220-240V 50Hz ~1	RSIR	P	C	50	75	107	0.85	239	126	1.10	8.4	Lb
GL60AAb	5.98	1/6	LBP	S	220-240V 50Hz ~1	CSIR	R	C-V	50	75	107	0.85	239	126	1.10	8.4	Lb
GL60AF	5.98	1/6	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	57	81	113	0.82	245	132	1.07	9.1	Lb
GL60AAa	5.98	1/6	LBP	S	200-240/220-230V 50/60Hz ~1	RSIR	P	C	57	82	114	0.83	244	133	1.09	9.1	Lc
GL60AAb	5.98	1/6	LBP	F	200-240/220-230V 50/60Hz ~1	CSIR	R	C-V	57	82	114	0.83	244	133	1.09	9.1	Lc
GL60AAc	5.98	1/6	LBP	S	200-240/220-230V 50/60Hz ~1	CSIR	R	C-V	57	82	114	0.83	244	133	1.09	9.1	Lc
GL60AAd	5.98	1/6	LBP	OC	200-240/220-230V 50/60Hz ~1	RSIR	P	C	57	82	114	0.83	244	133	1.09	9.2	Lc
GLY70AAa	6.65	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	70	96	132	1.05	288	154	1.36	9.7	Lb
GLY70AAb	6.65	1/5	LBP	S	220-240V 50Hz ~1	RSCR	P	C	71	97	133	1.12	289	155	1.44	9.7	Lb
GL70AA	6.65	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	58	86	121	0.87	268	142	1.12	8.8	Lc
GL70AAa	6.65	1/5	LBP	S	200-220/220-230V 50/60Hz ~1	RSIR	P	C	70	95	129	0.83	278	151	1.08	9.4	Lc
GL70AAb	6.65	1/5	LBP	F	200-220/220-230V 50/60Hz ~1	CSIR	R	C-V	70	95	129	0.83	278	151	1.08	9.4	Lc
GL70AAc	6.65	1/5	LBP	S	200-220/220-230V 50/60Hz ~1	CSIR	R	C-V	70	95	129	0.83	278	151	1.08	9.4	Lc
GL70AAd	6.65	1/5	LBP	OC	200-220/220-230V 50/60Hz ~1	RSIR	P	C	70	96	129	0.83	278	151	1.08	9.5	Ld
GLY75AAa	7.38	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	74	107	147	1.06	311	172	1.36	9.9	Lc
GLY75AAb	7.38	1/5	LBP	S	220-240V 50Hz ~1	RSCR	P	C	76	108	147	1.12	312	172	1.44	9.9	Lc
GL75AA	7.38	1/5	LBP	S	220-240V 50Hz ~1	RSIR	P	C	68	95	132	0.91	296	155	1.18	9.0	Lc
GLY80AAa	8.10	1/5	LBP	S	220-240V 50Hz ~1	RSCR	P	C	89	123	184	1.07	340	191	1.37	10.6	Lc

Private Picture Copyright: WWW.MBSM.PRO

Model: GL70AA

General data

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	43

Compressor's data

Cylinder capacity [cm ³]:	6,7
Displacement [m ³ /h]:	1,1
Weight [kg]:	9,6
Oil charge [cm ³]:	345
Oil type:	ISO VG 19 ESTER

Engine's data


Engine type:	RSIR
Power [KM]:	1/5
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	10,9
Running winding resistance (25°C) [Ω]:	12,59
Starting winding resistance (25°C) [Ω]:	22,02

Electrical data

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [μF]:	

Private Picture Copyright: WWW.MBSM.PRO

RSIR

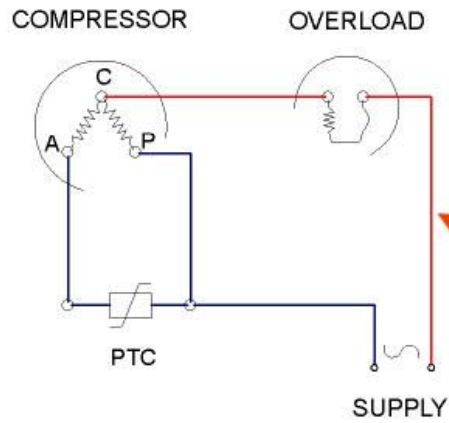

Private Picture Copyright : WWW.MBSM.PRO

■ R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE -23.3°C kcal/h	CECOMAF -25°C W	ASHRAE -23.3°C W/W	CECOMAF -25°C W/W	ASHRAE -23.3°C W/W	CECOMAF -25°C W/W
GL45AA	LBP-R134a	1.0	43	A	96	82	1.06	0.82		
GL45AH	LBP-R134a	1.0	50	C	96	81	1.05	0.8		
GL60AA	LBP-R134a	1.6	43	A	132	114	1.14	0.89		
GL60AF	LBP-R134a	1.6	43	D	132	113	1.07	0.82		
GL60AH	LBP-R134a	1.6	43	A	133	114	1.31	1.01		
GL60AN	LBP-R134a	1.6	50	C	132	114	1.07	0.83		
GL70AA	LBP-R134a	1.5	43	A	140	128	1.18	0.92		
GL70AH	LBP-R134a	1.5	50	D	150	129	1.08	0.83		
GL70AT	LBP-R134a	1.5	43	E	144	122	1.09	0.84		
GL75AA	LBP-R134a	1.5	43	A	155	133	1.18	0.92		
GL80AA	LBP-R134a	1.5	43	A	173	148	1.10	0.83		
GL80AF	LBP-R134a	1.5	43	D	166	141	1.14	0.88		
GL80AH	LBP-R134a	1.5	43	A	175	150	1.35	1.06		
GL80AN	LBP-R134a	1.4	43	A	196	168	1.36	1.06		
GL90AA	LBP-R134a	1.4	43	A	195	167	1.10	0.93		
GL90AH	LBP-R134a	1.4	43	A	217	182	1.30	1.06		
GL90AN	LBP-R134a	1.4	50	D	190	169	1.1	0.85		
GL90AT	LBP-R134a	1.4	43	E	190	161	1.19	0.92		
GL99AA	LBP-R134a	1.4	43	A	214	182	1.24	0.96		
GL99AH	LBP-R134a	1.4	43	A	215	182	1.30	1.06		
GL80AD	LBP-R134a	1.5	43	W	0	0	0	0		
GL90AD	LBP-R134a	1.4	43	W	0	0	0	0		



Private Picture Copyright : WWW.MBSM.PRO

ZMC

EGL70AT 0707

200-220V-50HZ

R 134 a

MADE IN EGYPT



3 412

1387458

Compresseur, THB1350YS, R-134a, 1/5HP, 230V, Tecumseh

Category: compressor

written by www.mbsm.pro | 26 December 2020



Private Picture Copyright : WWW.MBSM.PRO

- Modèle: **THB1350YS**
- Gaz: **R-134a**
- Température/Pression: **Basse Pression**
- Puissance: **1/5 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **5.2 cm³**
- Cons.Énergie -35°C: **76 W**
- Cons.Énergie -25°C: **100 W**
- Cons.Énergie -10°C: **142 W**
- T° De Condensation: **40 °C**
- Capacité Frigorífica -35°C: **52 Kcal/h**
- Capacité Frigorífica -30°C: **74 Kcal/h**
- Capacité Frigorífica -25°C: **102 Kcal/h**
- Capacité Frigorífica -20°C: **137 Kcal/h**
- Capacité Frigorífica -15°C: **176 Kcal/h**
- Capacité Frigorífica -10°C: **223 Kcal/h**
- Tipo Test: **EN.12900**



Private Picture Copyright : WWW.MBSM.PRO

Daewoo, HSL11Y-5 , Compresseur hermétique, R-134a, 93W, RSIR , 1/8Hp

Category: compressor

written by www.mbsm.pro | 26 December 2020

Series	Model	Displacement [cc/rev]	Consumption Power [W]	Cooling Capacity			Efficiency			Motor Type	Cooling Type	Net Weight [kg]	Oil Qty. [cc]
				kcal/h	Watt	Btu/h	EFF kcal/Wh	COP W/W	EER Btu/Wh				
DS	DS22LHS8	2.18	57	37	43	147	1.54	0.75	2.58	RSIR	ST	6.0	180
	DS25LHS8	2.54	63	50	58	198	1.26	0.92	3.15	RSIR	ST	6.0	180
	DS30LHS8	3.06	78	69	80	274	1.13	1.03	3.51	RSIR	ST	6.0	180
WX	WX20LHS5T	2.01	58	29	34	115	2.00	0.58	1.98	RSIR	ST	5.9	180
	WX24LHS5	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX24LHS5T	2.54	64	40	47	159	1.60	0.73	2.48	RSIR	ST	5.9	180
	WX24LHS8	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX30LHS5	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHS5T	3.06	88	59	69	234	1.49	0.78	2.66	RSIR	ST	5.9	180
	WX30LHS8	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHT5W	3.06	75	52	60	206	1.44	0.81	2.75	RSIR	ST	5.9	180
	WX35LHS5T	3.51	98	64	74	254	1.53	0.76	2.59	RSIR	ST	5.9	180
	WX35LHT5W	3.51	99	64	74	254	1.55	0.75	2.57	RSIR	ST	5.9	180
Y	HPL7Y-5	2.65	62	50	58	198	1.24	0.94	3.20	RSCR	ST	6.7	230
	HPL9Y-5	3.43	76	58	67	230	1.31	0.89	3.03	RSCR	ST	6.7	230
	HPL11Y-5	4.51	89	80	93	317	1.11	1.05	3.57	RSCR	ST	7.0	230
	HSL5Y-5	2.29	65	35	41	139	1.86	0.63	2.14	RSIR	ST	6.3	230
	HSL5Y-5P	2.29	64	35	41	139	1.83	0.64	2.17	RSIR	ST	6.7	230
	HSL7Y-5	2.65	74	48	56	190	1.54	0.75	2.57	RSIR	ST	6.7	230
	HSL9Y-5	3.43	74	46	53	183	1.61	0.72	2.47	RSIR	ST	6.7	230
JE	HSL11Y-5	4.51	109	80	93	317	1.36	0.85	2.91	RSIR	ST	7.0	230
	HSL11Y-5A	4.51	102	85	99	337	1.20	0.97	3.31	RSIR	ST	7.0	230
	HSL11Y-5T	4.51	108	78	91	310	1.38	0.84	2.87	RSIR	ST	7.0	230
	HPL13JE-5	4.62	97	93	108	369	1.04	1.12	3.80	RSCR	ST/FC	7.4	230
	HPL15JE-5	5.12	107	107	124	425	1.00	1.16	3.97	RSCR	ST/FC	7.7	230
	HPL17JE-5	5.55	124	123	143	488	1.01	1.15	3.94	RSCR	ST/FC	7.7	230
	HPL19JE-5	5.84	124	134	156	532	0.93	1.26	4.29	RSCR	ST/FC	8.2	230
	HSL15JE-5	5.12	114	108	126	429	1.06	1.10	3.76	RSIR	ST/FC	7.7	230
	HSL15JE-5A	5.12	117	109	127	433	1.07	1.08	3.70	RSIR	ST/FC	7.7	230
	HSL15JE-5C	5.12	115	108	126	429	1.06	1.09	3.73	RSIR	ST/FC	7.8	230

Private Picture Copyright : WWW.MBSM.PRO

Daewoo, HSL11Y-5 , Compresseur hermétique, R-134a, 109W, RSIR , 1/8Hp

**TPH1413YKS, R-134a, 220-240V à 50Hz,
Tecumseh/Taikang , 271 w , 3/8Hp**

Category: Technologie, Tester ok

written by www.mbsm.pro | 26 December 2020



(P)



Tecumseh

14944038

R-134a


TPH1413YKS

220-240V ~ 50 Hz

LRA: 13

626-10017

(T)

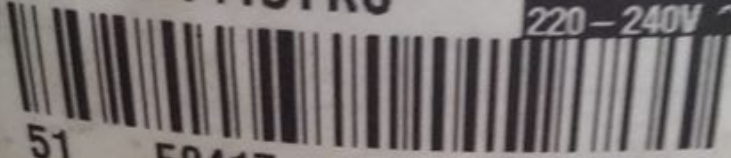


51

E0417

12

154807



THERMALLY PROTECTED
COUNTRY OF ORIGIN: BRAZIL



Private Picture Copyright : WWW.MBSM.PRO

TPH1413YKS, R-134a, 220-240V à 50Hz, Tecumseh/Taikang , 271 w , 3/8Hp

Ideal Zanussi Comfort refrigerator ,
340 L , 17 Feet , Compresseur Cubigel
,Compresseur ,GL90AA ,R-134a ,1/4HP
,230V,non frost

Category: Non classé,Technologie,Tester ok
written by www.mbsm.pro | 26 December 2020



Private Picture Copyright : WWW.MBSM.PRO

Ideal Zanussi Comfort refrigerator , 340 L , 17 Feet , Compresseur Cubigel
,Compresseur ,GL90AA ,R-134a ,1/4HP ,230V,non frost

KCE444HAG , 3/8 Hp , 230V, 50Hz, 1Phase ,High / Medium temperature (HBP / CBP), R-134a

Category: Technologie, Tester ok
 written by www.mbsm.pro | 26 December 2020

High Back Pressure			Performance Nominals						Commercial Back Pressure		
Model	HP	Displacement cc per Rev	Capacity						Cooling Type (CFM)	Oil Charge Qty (cc)	Net Wt. (Kg.)
			7.2°C			-6.7°C					
			Btu/Hr.	kCal/Hr.	Watt	Btu/Hr.	kCal/Hr.	Watt			
R134a, 50 Hz, 1 Phase											
KCE419HAG	1/6	5.79	1585	399	465	860	217	252	Fan 350	310	10.2
KCN413CAG	1/6	6.15	-	-	-	1080	272	316	Fan 350	340	9.7
KCE425HAG	1/5	7.58	2145	540	629	1075	271	315	Fan 350	310	10.8
KCN416CAG	1/5	7.31	-	-	-	1380	338	392	Fan 350	340	9.7
KCE432HAG	1/4	9.42	2690	678	788	1330	332	390	Fan 350	310	11.8
KCE444HAG	3/8	12.05	3675	926	1077	1880	474	551	Fan 350	310	11.8
KCJ444HAG	3/8	12.58	3700	932	1064	1720	433	504	Fan 350	890	20.2
KCN463HAG	1/2	15.33	5250	1323	1538	3130	789	917	Fan 350	380	11.5
KCJ467HAG	1/2	18.27	5600	1411	1640	2830	713	829	Fan 350	890	21.0
KCJ498HAG	3/4+	25.91	8200	2066	2402	4100	1033	1201	Fan 350	890	21.5
R134a, 60 Hz, 1 Phase 230 V											
KCE432HAG	1/4	9.42	3225	813	944	1595	402	467	Fan 350	310	11.8
KCE444HAG	3/8	12.05	4275	1077	1252	2187	551	640	Fan 350	310	11.8
KCN463HAG	1/2	15.33	6300	1588	1845	3443	868	1008	Fan 350	380	11.5
KCJ467HAG	1/2	18.27	6700	1688	1964	3120	786	914	Fan 350	890	21.0
KCJ498HAG	3/4+	25.91	9250	2330	2710	4633	1167	1358	Fan 350	890	21.5
R134a, 60Hz, 115V											
KCE444HAG	1/3	12.05	4200	1058	1231	2175	548	637	Fan 350 FM	310	11.8

Private Picture Copyright : WWW.MBSM.PRO

KCE444HAG , 3/8 Hp , 230V, 50Hz, 1Phase ,High / Medium temperature (HBP / CBP), R-134a

www.mbsm.pro , Compresseur Cubigel , Compresseur GL90AA R-134a 1/4HP 230V ,

Category: Non classé
 written by mahdi miled | 26 December 2020



cubigel
compressors


GL90AA

220-240V~50Hz

R134a

PH1

THERMALLY PROTECTED



MADE IN SPAIN



2

7045338569100901

08261



paramètres techniques

numéro de pièce

605185

fréon

R134a

type

GL90AA

voltage

220-240 V

fréquence

50 Hz

domaine d'utilisation

LBP

poids

9.4 kg

puissance

1/4 HP

puissance absorbée

184 W

cylindrée

8.1 cm³

système de moteur

RSIR

hauteur

185.6 mm

puissance à -30°C

148 W

puissance à -25°C

200 W

puissance à -20°C

261 W

puissance à -15°C

330 W

puissance à -10°C

407 W

puissance à -5°C

– W

puissance à 0°C

– W

puissance à +5°C

– W

puissance à +10°C

– W

température ambiante max.

43 °C

www.mbsm.pro-Cubigel-14H-GL90AA.jpg (52 KB)



smart 2 Pro
INFINITY DUAL CAMERA

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

www.mbsm.pro-Cubigel-14H-GL90AA.jpg (54 KB)



pyright : WWW.MBSM.PRO



pyright : WWW.MBSM.PRO

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

Category: Solutions, Tester ok

written by www.mbsm.pro | 26 December 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

BRAND

◦ – ZMC

TECHNICAL SPECIFICATIONS :

- MODEL: **EGL 90 AA**
- POWER: **1/4 Hp**
- VOLTAGE: **220 – 240 V**
- WATT: **227.00 W**
- REFRIGERANT GAS: **R 134**
- K.CAL: **195.00 Cal.**

Features : The compressors form the basis of the refrigerant system and function to compress the gas from the evaporation to the condensation pressure.

USAGE PLACES :

It is used in Refrigerator devices belonging to all brands and models.

INSTRUCTIONS FOR USE:

Zmc EGL90AA;It is recommended to be used by a specialist authorized or authorized service.



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger
Mbsm_dot_pro_private_PDF_cubigel-katalogTélécharger