

Compressor, NL7.3FT, SECOP, 105G6726,
DANFOSS, 6726, 105G, 105 G 6726, 105G
6726, 1/5 HP, 180W, LBP, Zanussi,
Kiriazi Electric Company, TGV 335L,
NO FROST, TSV 320L, FC 83L , R134A,
125G, 220-240V 50Hz, CSIR

Category: compressor

written by www.mbsm.pro | 16 February 2021

KIRIAZI



CE



ELECTRIC
COMPANY

®

Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



● ○ REDMI NOTE 8
○ ∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

Type de gaz	App	HP	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	


R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4 /	213	NLY7F	
		(1)			
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / 1/3 HBP	264	SC12G	
R134A	LBP / MBP / 1/2 HBP	392	SC18G	
R134A	LBP / MBP / 3/4 HBP	456	SC21G	SC
R134A	MBP 3/4	1073	SC21MFX	
R134A	LBP 3/4	567	SC21FTX	
R404A	LBP 1	1033	ST21CL	
R404A	LBP 1	986	SC18CLX.2	
R404A	MBP 1/2	359/650	SC15MLX	
R404A	MBP 7/8	762/1584	SC18MLX	

KIRIAZI



CE



ELECTRIC
COMPANY

®


Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



REDMI NOTE 8
AI QUAD CAMERA



REDMI NOTE 8
AI QUAD CAMERA

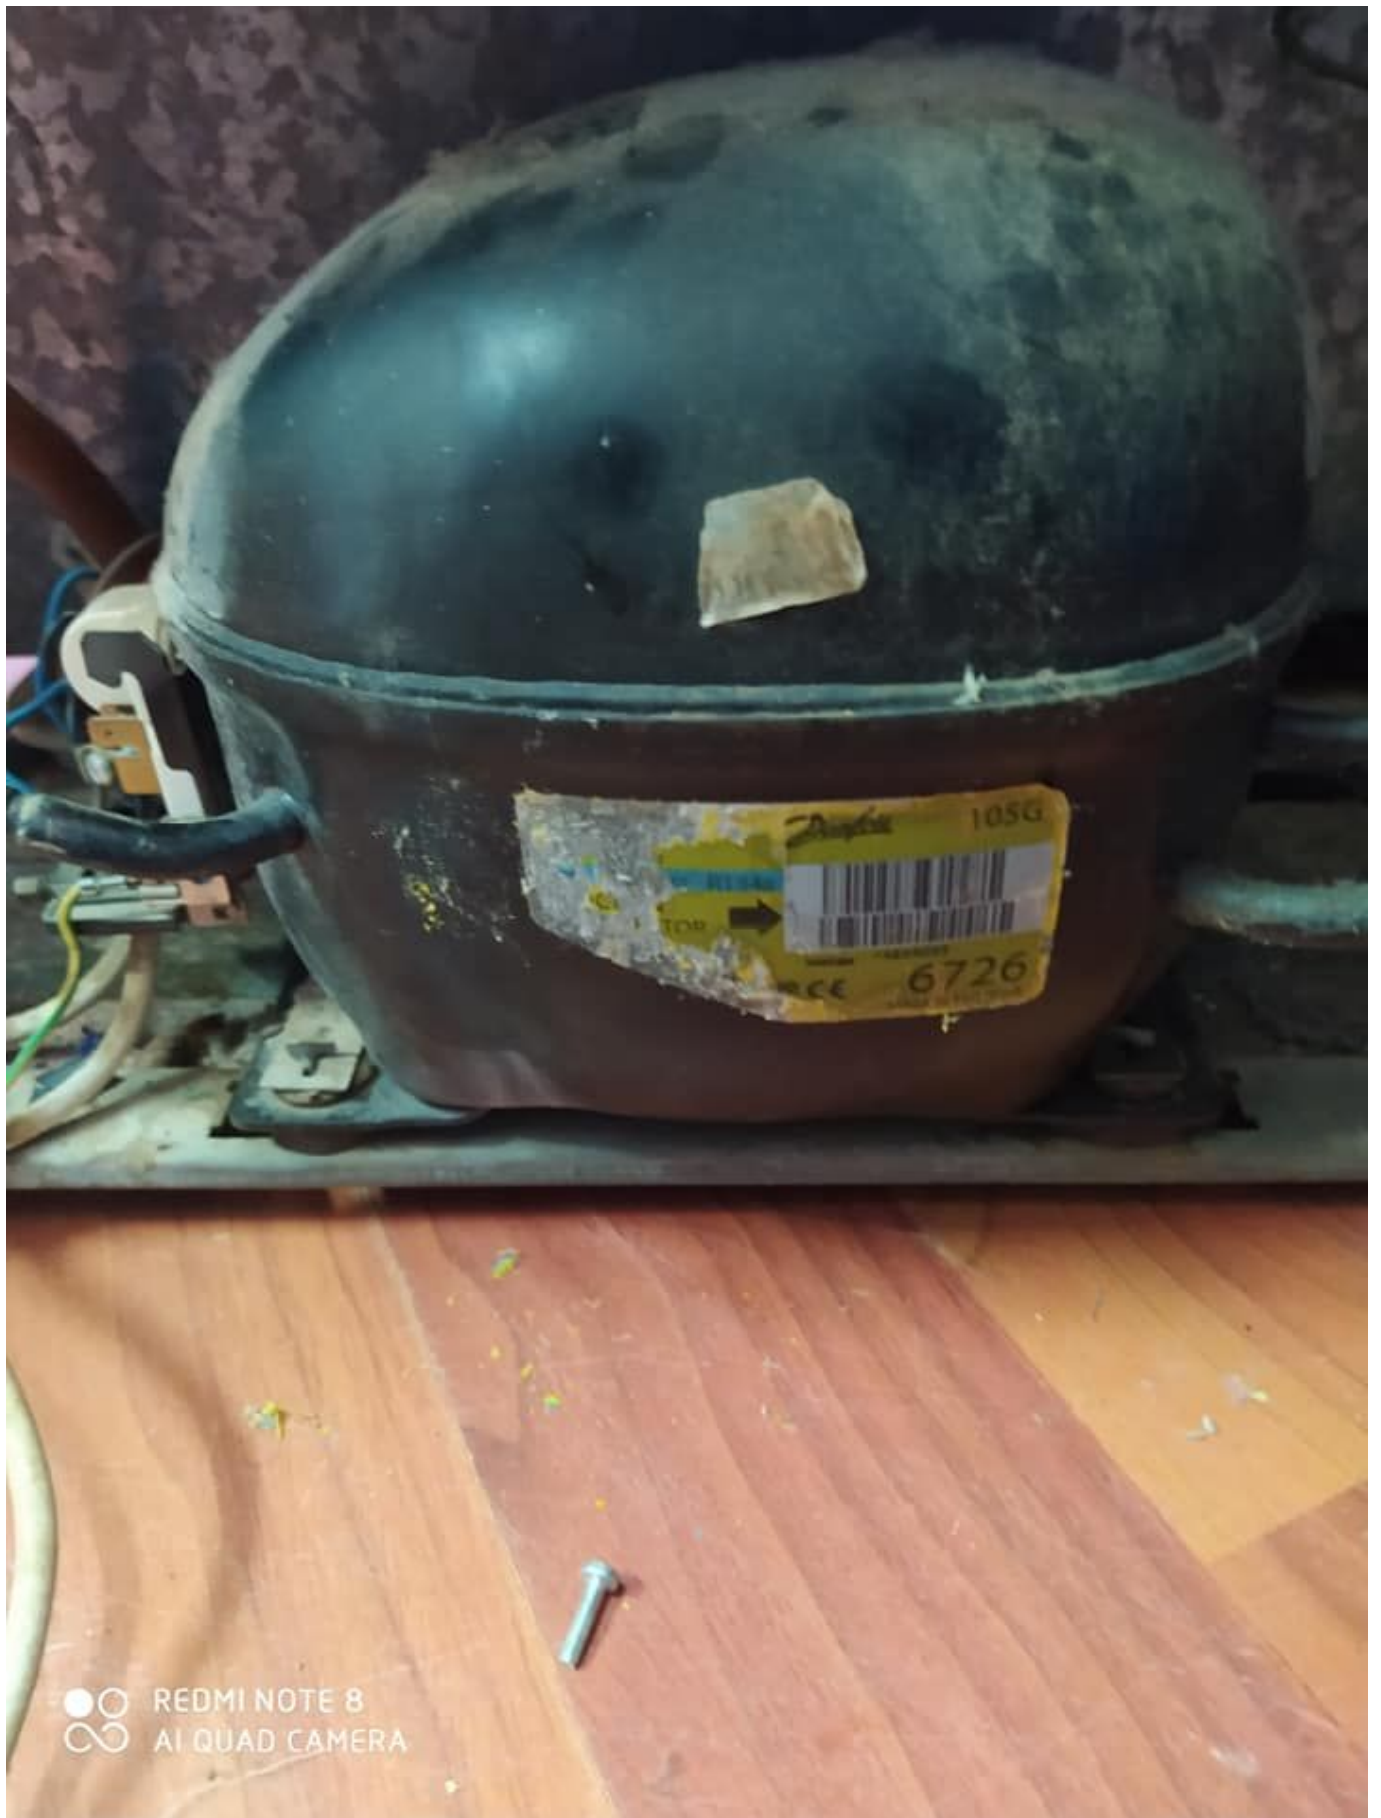

REDMI NOTE 8
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NL7.3FTTélécharger
Mbsm_dot_pro_private_PDF_nl73ft_105g6731_r134a_220v_50hz_11-2011_desd406c102Télé
charger

Refrig	Applic	oil cooling	Evaporating temperature [°C]											Evaporating tem					
			-35	-30	-25	-20	-15	-10	-5	0	5	10	15	-25	-10				
R134a	LBP		1/20	14	26	40	56	74	95								60	86	
		PL50F	101G0220	1/20	14	26	40	56	74	95								60	86
		TL53FT	102G4324	1/16	21	34	50	69	92	120								62	93
		TL54FT	102G4424	1/10	27	43	63	88	117	152								88	123
		TL55FT	102G4524	1/8+	48	71	98	131	170	216								114	165
		TL55.7FT.3	102G4615	1/6	66	90	120	156	200	253								120	170
		TL56.5FT.3	102G4703	1/5			136												139
		NL6FT	105G6628	1/6	60	84	115	152	198	253								123	184
		NL6.1FT	105G6620	1/6	60	84	115	152	198	253								123	184
		NL7FT	105G6728	105G6738	1/5	71	100	136	181	235	299							145	220
		NL7.3FT	105G6726		1/5	71	100	136	181	235	299							145	220
		NL8.4FT	105G6865		1/4	87	120	162	213	275	350							169	252
		NL9FT	105G6828	105G6838	1/4	87	120	162	213	275	350							169	252
		NL10FT	105G6829	105G6839	1/3	113	158	213	281	361	455							215	316
		NLE7.3FT	105G6710		1/4	92	118	154	201	258	325							148	221
		SC12FT	104G8205	104G8215	1/3	103	163	233	314	408	517	645						265	380
		SC15FT	104G8505		1/2	126	197	280	376	489	620	772						311	451
		SC18FTX	104G8805		5/8	144	229	325	437	567	719	896						365	517
		SC21FTX 50Hz	104G8105		3/4	192	296	415	553	713	901	1119						428	613
		SC21FTX 60Hz	104G8106		3/4	240	345	470	620	800	1012	1262						475	707
	TL2.5G	102G4251		1/12	11	23	36	51	69	90	116	145	179	219	264		60	84	
	TL3G	102G4350		1/12	25	41	59	81	106	136	170	211	258	312		66	96		
	TL4G	102G4452		1/8	41	58	80	107	140	180	226	280	342	413		83	118		
	TL5G	102G4550		1/6	56	79	107	139	178	224	278	341	414	497		100	149		
	FR6G	103G6660		1/5	48	83	124	171	226	290	365	452	552			109	172		
	FR7.5G	103G6680	103G6690	1/5	62	99	142	193	254	325	408	505	618			126	194		
	FR8.5G	103G6780	103G6790	1/4	85	123	171	228	298	381	478	592	722			151	231		
	FR10G	103G6880	103G6890	1/4	92	136	188	250	324	412	516	638	779			179	265		
	FR11G	103G6980		1/3	115	170	233	307	395	501	628	780				202	317		
	TL6.5MF	102G4781		1/4			174	219	279	349	425	520						202	
	NL6.1MF	105G6660		1/5			141	189	245	312	390	482	588	709				187	
	NL7.3MF	105G6772		1/4			179	236	304	385	480	591	719	867				227	
	NL8.4MF	105G6879		1/4+			213	277	353	445	553	679	825	994				261	
	NL10MF	105G6885		1/3			266	346	441	554	687	843	1023	1231				323	
	NLE10MF	105G6888		1/3	88	137	194	262	343	440	554	688	845				198	308	
	NL11MF	105G6151		3/8			292	380	485	609	756	927	1125	1354				360	
	SC10G	104G8000		5/16	23	60	113	183	268	369	486	618	764	925	1100		181	290	
	SC12G	104G8240	104G8250	3/8	65	113	175	252	348	464	603	768	960	1182	1437		227	355	
	SC15G	104G8520	104G8530	1/2			164	290	424	568	728	908	1110	1340	1600		233	440	
SC18G	104G8820	104G8830	1/2+			283	394	526	684	870	1087	1337	1624	1950		331	507		

model	watt	HP	LBP/MBP	نوع گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	هیجریک SC21G
SC21FTX	567	3/4	LBP	134	هیجریک SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سلفن NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	هیجریک SC12G (پارنه و سلفن)
NL11MF	621	1/3	MBP	134	هیجریک SC12G (پارنه و سلفن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سلفن NL7 - High efficiency (7% در رانندگی)
NLY7F	213		LBP	134	سلفن NL9 - High efficiency (7% در رانندگی)
NLY9FK	237		LBP	134	High efficiency (7% در رانندگی)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -33.3°C ASHRAE) زیر صفر
(MBP @ -6.7°C ASHRAE) بالای صفر

Refrigeration, Compressor, K270CZ1, 1/3++, DONPER, Dongbei , K325CZ1, K375CZ1 , freezer, R134a, White HIK-BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

Category: compressor

written by www.mbsm.pro | 16 February 2021

PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO

Quick Details

Temperature:

-25° ~ +15°

Cooling Capacity:

1ton

Panel Thickness:

50mm

Applicable Industries:

Retail

After Warranty Service:

Online support

Local Service Location:

None

Showroom Location:

None

Condition:

New

Place of Origin:

Hubei, China

Voltage:

220V, 220V/50HZ

Dimension(L*W*H):

10-10*10

Weight:

15KGS

Certification:

CE ROHS

Warranty:

1 Year

After-sales Service Provided:

Online support, No overseas service provided

Key Selling Points:

Sustainable

Machinery Test Report:

Not Availabl

Video outgoing-inspection:

Provided

Marketing Type:

New Product 2020

Warranty of core components:

1 Year

Core Components:

Motor

Color:

Balck

Product name:

Refrigerator Compressor

Refrigerant:

R134a

model:

K270CZ1

Cooling capacity:

230W

Product Description

Refrigerant	R134a	Cooling capacity	270W
Input power	220W	Hose Power	220W
Temperature application	L/MBP	Displacement	9.5cm ³
Working Current	1.5A	Voltage	220V~240V/50Hz
COP	1.3W/W	Motor type	RSIR
Cylinder capacity	9.5cm ³	Weight	9.8±0.4kg

Structure



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO

Notice : process channel and air suction pipe can not interchangeable

Product Name : Donper Compressor	Model: K270CZ1
Application : Refrigerator	Power supply :220v~240v/50Hz
Refrigeration capacity:270W	Power :220W
cylinder volume:9.5cm ³	refrigerant: R134a
Motor :RSIR	COP:1.3W/W
Weight :9.8±0.4kg	working current :1.5A



Private Picture Copyright : WWW.MBSM.PRO

Compressor Details

Production Name	Refrigerator compressor	Model	K270CZ1
Application	Refrigerator/ Freezer(300L~400L)	Power	220V~240V/50HZ
Cooling capacity	270W	Input power	220W
Cylinder volume	9.5Cm ³	Refrigerant	R134a
Motor type	RSIR	COP	1.3W/W
Weight	9.8±0.4kg	Current	1.5A

Private Picture Copyright : WWW.MBSM.PRO

Product Specification

Capacity	500 L
Type	Top Open
Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500

Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control,Digital Display,75mm Insulation Wall Thickness,Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm
Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Control, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness
- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

Additional Information

Packaging Details Box Dimensions: 1695 x 760 x 880mm Included:1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

Réfrigérant: R134a

Tension: 220 V ~ 240 V / 50 HZ

Puissance en chevaux: 1/2 ph

Puissance d'entrée: 235 W

Capacité de refroidissement: 325 W

Cylindre de capacité: 11,4 centimètres cubes

Courant de travail: 1.6A

Type de moteur: CSIR

Poids: 9,9 ± 0 4 kg

875000033

 **K375CZ**
220-240V~50Hz 1PH
THERMALLY PROTECTED

     1

<http://www.donper.com>

160111104220202452

R134a



Private Picture Copyright : WWW.MBSM.PRO

Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

Category: compressor

written by www.mbsm.pro | 16 February 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

MODEL QA66C14GAX5
220V ~ 50Hz 1PH R134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
MADE IN MALAYSIA



Electrostar
الالكتروستار

Model **ES170 T**

طراز

W **136** وات

A **1.12** أمبير

HZ **50**

ذبذبة

Ser No.



018018

ممتثل

V

220

فولت

R134a

100 gm

وزن وسيط
التبريد

Total Capacity 170 Lit.

Class T

صنع في مصر

FR6B, Compressor, 103U2654, FR6B
103U2654, DANFOSS TL, FR and SC
Hermetic Compressors, DANFOSS,
Kiriazi, 343L, 1/5 Hp, MBP, R12,
280g, équivalence, 1/4Hp, R134A, 190g

Category: compressor

written by www.mbsm.pro | 16 February 2021



Private Picture Copyright: WWW.MBSM.PRO

Compresseurs hermétiques DANFOSS TL, FR et SC

BOC partie No.	Code Danfoss	Puissance nominale et applic	Refrig.	Capacité nominale (watts)	Réf . BOC	Code Danfoss	Puissance nominale et applic	Réfrigérer	Capacité nominale (watts)
FR6B	103U2654	1/5 MBP	R12	354	TL3F	102G4300	1/10 LBP	R134a	58
FR8.5B	103U2854	1/4 MBP	R12	450	TL4F	102G4400	1/8 LBP	R134a	84
SC10B *	104L2510	1/3 MBP	R12	588	TL55F	102G4520	1/6 LBP	R134a	127
FR11B	103U2154	1/3 MBP	R12	624	TL57F	102G4720	1/5 LBP	R134a	162
SC12B *	104L2670	4/9 MBP	R12	756	NL7F	105G6706	1/4 LBP	R134a	183
SC15B *	104L2830	1/2 MBP (LBP)	R12 (R502)	912 (768)	NL9F **	105G6802	1/4 LBP	R134a	214

SC18B *	1042110	2/3 MBP (LBP)	R12 (R502)	1044 (900)	NL11F **	105G6910	1/4 LBP	R134a	274
SC21B	104L2310	3/4 MBP	R12	1212	SC15F **	104G8500	1/3 LBP	R134a	319
SC10B	104L2510	1/3 LBP	R502	468	SC18F **	104G8800	4/9 LBP	R134a	395
SC12B	104L2670	4/9 LBP	R502	612	TL3G	104G4350	1/8 MBP	R134a	175
SC15C	104L2832	2/3 LBP	R502	768	TL4G	102G4452	1/6 MBP	R134a	215
SC18C	104L2111	3/4 LBP	R502	900	FR6G	103G6660	1/5 MBP	R134a	351
SC10G	104G8000	1/3 MBP	R134a	591	FR8.5G	103G6780	1/4 MBP	R134a	468
SC12G	104G8240	4/9 MBP	R134a	751	FR11G	103G6980	1/3 MBP	R134a	609
SC18G	104G8820	2/3 MBP	R134a	1059	SC15G	104G8520	1/2 MBP	R134a	892
SC21G	104G8140	3/4 MBP	R134a	1256	SC10CL	104L2523	1/3 MBP	R507	450
SC12CL	104L2623	4/9 LBP	R507	624	SC15CL	104L2853	2/3 LBP	R507	758
SC18CL	104L2123	3/4 LBP	R507	893					

Remarque:

1. Les compresseurs marqués ** sont équipés de raccords de refroidisseur d'huile.
2. Les compresseurs marqués * peuvent être utilisés sur les systèmes R502 avec fonctionnement à tube capillaire dans la gamme LBP.
3. (Systèmes sans dégivrage automatique uniquement).

Capacités nominales basées sur:

LBP = -23,3 ° C température d'évaporation

MBP = -5 ° C température d'évaporation

Relais de remplacement (appareil de démarrage)	
Réf . B0C	Convient au modèle de compresseur
103N0011	TL3A à TL5A, FR7.5A à FR11A
103N0002	SC12A, SC15A

KIRIAZI

REFRIGERATORS MANUFACTURING Co

Made in Egypt



شركة إنتاج التلاجات المنزلية
كيريازي
صنع في مصر

Energy Consumption	220 V	50 HZ	180 W	1.15 A
Capacity Refrigerator	343 L	Freezer 97 L	Total	440 L
Freezing Capacity	7 Kg 24 h	Cooling System		20 BAR
Refrigerating Gas	280 gr	Consumption (k.w-h/24h)		2.4
Model NO FROST	K-440	Motor Tropical		
Serial Number	موتور تروبيكال			



Private Picture Copyright : WWW.MBSM.PRO

FR6B	103 U26 54	1/ 5 M BP	R 1 2	3 5 4	T L 3 F	1 0 2 G 4 3 0 0	1 /	R 1 3 4 a	5 8
------	------------------	--------------------	-------------	-------------	------------------	--------------------------------------	--------	-----------------------	--------




Private Picture Copyright : WWW.MBSM.PRO

Embraco, NBT1118Z, Refrigerator, Freezer, Compressor, 1/4 HP, R134a, LBP, RSCR

Category: compressor

written by www.mbsm.pro | 16 February 2021

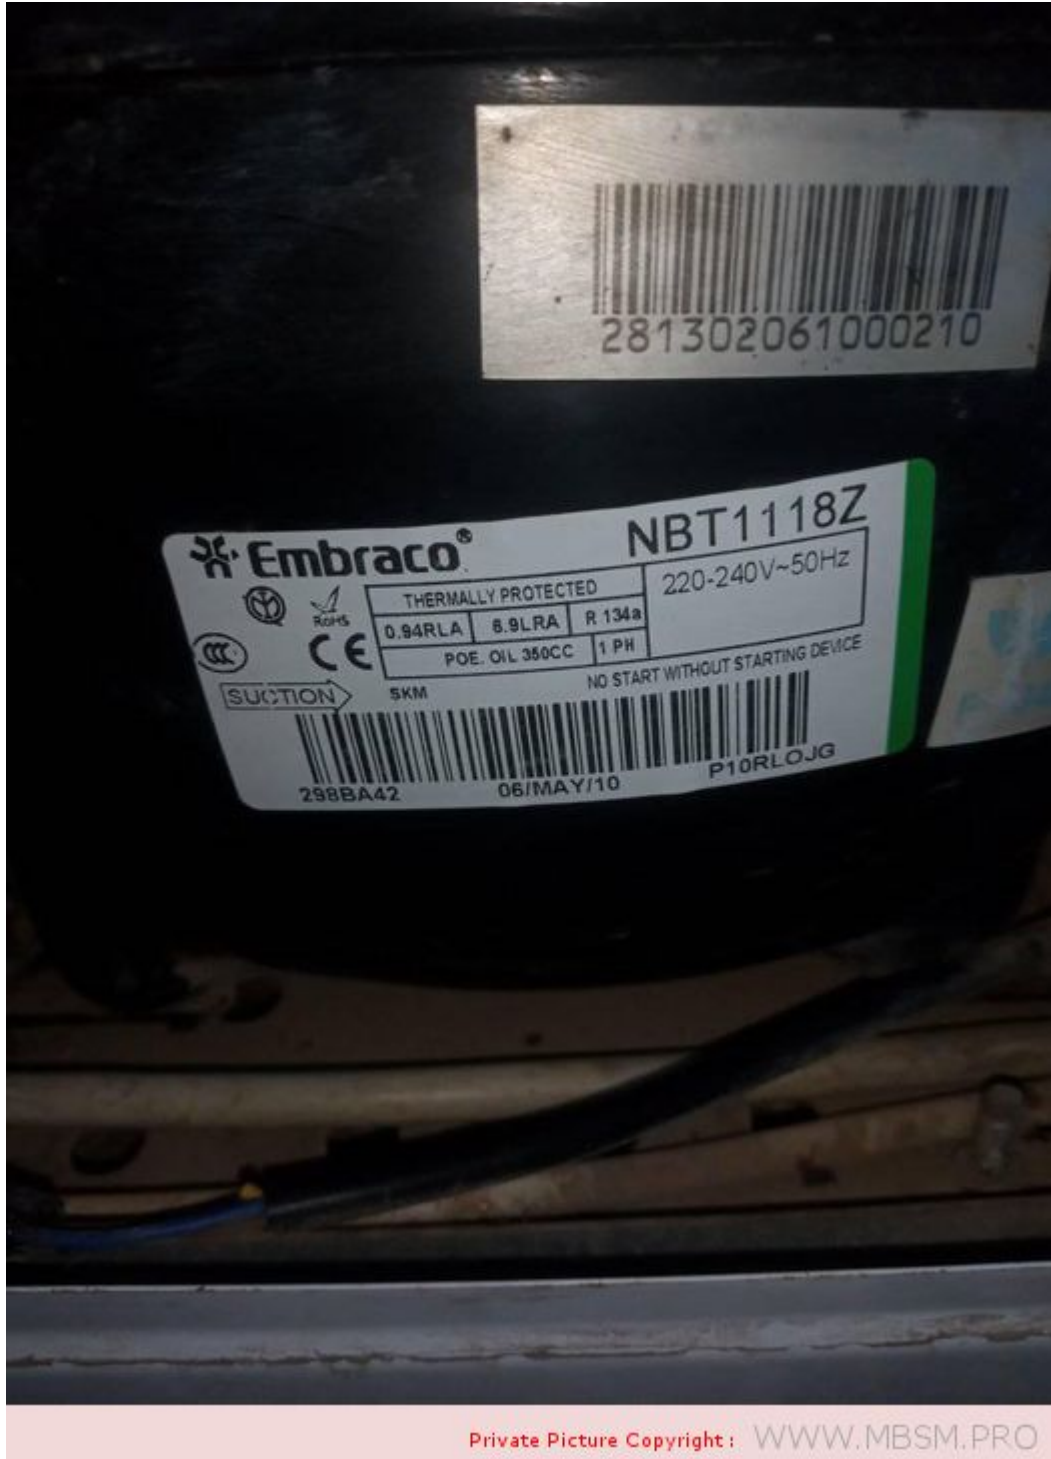

Réfrigérant: R-134a

Application: LBP

Fréquence: 50Hz

Déplacement: 8.40cm³ / 0.51in³

B.OM : 298BA

Tension / Fréquence: 220-240V 50Hz 1 ~

Type de moteur: Démarrage résistif Inductif Run-Resistive Start Capacitive Run
LRA (A): 6.9

Dispositif d'expansion:

Lubrifiant capillaire : Charge: 350cm³, 6.2oz³;

Type: polyolester 10

Poids: 10,8 kg, 23,8

lb Hauteur maximale: 200,0 mm, 7,9 pouces

Type de refroidissement: (Refroidissement statique) – le compresseur n'a pas besoin de refroidissement forcé, mais il doit être installé afin de garantir la circulation naturelle de l'air en convection, pour éviter la surchauffe.

Capacité nominale / température d'évaporation, W / ° C (avec une température de température de 54,4 ° C): 150 / -30,204 / -25,271 / -20,352 / -15? 446 / -10,554 / -5

Capacité nominale / température d'évaporation, W / ° C (avec température ambiante de 45 ° C): 165 / -30, 220 / -25,289 / -20,371 / -15? 468 / -10,579 / -5

Point nominal -23,3 ° C : Refroidissement: 225 W, 194 kcal / h;

W. entrée: 151W;

Courant: 0,60A;

EER: 1,49 W / W, 1,28 kcal / hW

Détails techniques

220/240V 50Hz

puissance 1/4L – cylindrée 8,40 cc

gaz R134a LBP

ASPERA

MONDIAL FRAMEC

Mondial Framec Armoire réfrigérée BRIO ICE 4 SK, KIC N40 R134A EBA210815, KIC NX40 R134A EBA210813

...et d'autres dispositifs

NBT1118Z-RSCR – ASPERA

NBT1118Z-RSCR – EMBRACO

LF3070231 – GEV – MONDIAL FRAMEC

...numéros de fabricant supplémentaires possibles



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NBT1118Z_Embraco_VerdichterTélécharger

Tecumseh, Compressor, TPA1410YXC, TPA
1410 YXC, LBP, R134a, 220-240V ~
50Hz, 1/4 + HP, 115V

Category: compressor

written by www.mbsm.pro | 16 February 2021



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, refrigerator, TPA1410YXC, KIRIAZI, no frost, 635 L, r134a, 180 g, Compressor, TPA1410YXC, 1/4 hp++

Fabricant: Tecumseh

R134a Compressor

Low Temperature

Compresseurs haute température R134a chargés d'huile ester et ont une plage d'évaporateur de 20 ° F à 55

° F R134a compresseurs de température commerciale chargés d'huile ester et ont une plage d'évaporateur de 0 ° F à 50 ° F

Compresseurs basse température R134a chargés d'huile ester et ayant une plage d'évaporateur de -40 ° F à + 10

° F Tous les composants de départ sont inclus si nécessaire

Tout le matériel de montage inclus

Capacité nominale en BtuH basée sur une température de condensation de 130 ° F

Spécifications

Aspiration Conn: 5/16 "IDS

Discharge Conn: 1/4" IDS

HP: 1/4 +

Volts: 115

Phases: 1

BtuH Capacité à 20 ° F Evap: 1100

Remplace la référence: TPA1410YXA, B81-983

Spécifications du produit

Performance

État	Tension d'essai	(R) Btu / h	(R) kcal / h	(R) W	(I) W	(E) Btu / Wh	(E) kcal / Wh	W / W	TEMP ÉVAP ° C	COND TEMP ° C	TEMPÉRATURE AMBIANTE ° C	RETOUR GAZ ° C	TEMP. LIQUIDE ° C
ASHRAE (R-513A)	220V ~ 50HZ	977	246	286	186	5,24	1,32	1,54	-23 ° C (-10 ° F)	54 ° C (130 ° F)	32 ° C (90 ° F)	32 ° C (90 ° F)	32 ° C (90 ° F)
ASHRAE (R-134a)	220V ~ 50HZ	920	232	270	176	5,23	1,32	1,53	-23 ° C (-10 ° F)	54 ° C (130 ° F)	32 ° C (90 ° F)	32 ° C (90 ° F)	32 ° C (90 ° F)

Général

Température d'évaporation. Gamme : -34,4 ° C à -12,2 ° C (-30 ° F à 10 ° F)

Couple moteur : Couple de démarrage faible (LST)

Refroidissement du compresseur : Ventilateur

Mécanique

Poids : 30
Unité de mesure de poids : KG
Déplacement (cc) : 8,374
Type d'huile : Polyolester
Viscosité (cSt) : 32
Charge d'huile (cc) : 185

Électrique

Gamme de tension (50 Hz) : 198-264
Gamme de tension (60 Hz) : N / A
Ampères à rotor bloqué (LRA) : 17
Intensité de charge nominale (RLA 50 Hz) : 0,82
Intensité de charge nominale (RLA 60 Hz) : 0
Max. Courant continu (MCC en ampères) : 0
Résistance du moteur (Ohm) – Principal : 10,19
Résistance du moteur (Ohm) – Démarrage : 6,07
Type de moteur : PTCS_CR
Type de surcharge : N / A
Type de relais : N / A

Répertorié IRAM, reconnu cURus



Private Picture Copyright : WWW.MBSM.PRO



Copyright: WWW.MBSM.PRO



Picture Copyright: WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_TPA1410YXCTélécharger](#)

[Mbsm_dot_pro_private_PDF_TPA1410YXC-Tecumseh-do-Braziltélécharger](#)

Fiche Technique, Samsung RT30GBTS,
Algérie, Caractéristiques,
Réfrigérateurs, 300Lt, no-frost,
600×621×1560, R134a, 160G, 135W,
Compressor 1/6HP

Category: Technologie

written by www.mbsm.pro | 16 February 2021



Private Picture Copyright : WWW.MBSM.PRO

Fiche Technique Réfrigérateur Samsung RT30GBTS

Marque	Samsung
Réfrigérateur	RT30GBTS
Catégorie	2 Portes
Capacité Totale	370 Litres
Capacité Réfrigérateur	Litres
Capacité Congélateur	Litres
Capacité de congélation	
Autonomie du congélateur	
Largeur	60 Cm
Hauteur	157 Cm
Profondeur	64 Cm
Poids	61
Nombre de tiroirs Réfrigérateur	1
Nombre d'étagères Réfrigérateur	2

Nombre de tiroirs Congélateur	0
Nombre d'étagères Congélateur	1
Accessoires inclus	Aucun
Réfrigérant	R134a
Caractéristiques particulières	Aucune
Nombre de portes	2
Position du congélateur	En haut
Couleur	Blanc
Dégivrage Automatique	18
Congélation rapide	19



Specification						
Model	RT30		RT34		RT37	
	RT30MA	RT30MB	RT34MA	RT34MB	RT37MA	RT37MB
Dimension(WxDxH) mm.	600x640x1560	600x610x1560	600x640x1630	600x610x1630	600x690x1630	600x660x1630
Gross Capacity	264 liter		281 liter		314 liter	
Net Capacity	259 liter		275 liter		306 liter	
Rated Voltage	230-240 V~					
Rated Frequency	50 Hz					
Rated Input	135W					
Rated Current	0.6A					
Defrosting Input(W/A)	150W/0.63A					
Climatic Class of The Appliance	N					
Rated Maximum Input of Lamp	15W					
Refrigerant	HFC-134a(160g)					
Mass	58.5 Kg		60 Kg		63 Kg	
Power Consumption	1.16kwh/24hr		1.25kwh/24hr		1.33kwh/24hr	
Freezing Capacity	4.8kwh/24hr					



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Samsung-1Télécharger

Mbsm_dot_pro_private_PDF_SamsungTélécharger

Hitachi Compressor, LBP, R134a, FL1152-RG, 1/6 Hp, 155W, série R012

Category: compressor

written by www.mbsm.pro | 16 February 2021

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO

HITACHI FL1152-RG

220V 50/60Hz OIL 2010.04.27



SERIAL NO. 00542 HFC-134a

⚠ WARNING | HIGH TEMPERATURE
ELECTRIC SHOCK
DO NOT TOUCH H24

60Hz	FL1462-P*	6.2	180	154	615	350	St	RSR	10.5	200	
	FL1462-P*	6.2	210	180	717	310	St	RSCR	11.8	216	
	FL1568-P*	6.8	210	180	717	310	St	RSCR	11.5	217	
	FL1675-P*	7.5	233	200	795	300		OC	RSR	10.8	216
	FL1875-P*	7.5	225	193	768	300		OC	RSR	11.9	211
	FL1875-P*	7.5	255	219	871	300		OC	RSCR	11.9	216
	FL0634-U*	3.4	98	84	335	270	St	RSR	8.3	179	
	FL0739-U*	3.9	114	98	389	270	St	RSR	8.3	179	
	FL1052-U*	5.2	147	126	502	270	St	RSR	8.1	179	
127V	FL1152-U*	5.2	155	133	529	240	St	RSR	9.0	180	
60Hz	FL1262-U*	6.2	173	148	591	320	St	RSR	9.8	195	
	FL1462-U*	6.2	180	154	615	350	St	RSR	10.5	200	
	FL1568-U*	6.8	208	178	710	310	St	RSCR	11.5	216	
	FL1568-U*	6.8	228	196	778	310	St	RSR	10.5	200	
	FL1875-U*	7.5	225	193	768	300		OC	RSR	11.1	216
200V	FL1875-T*	7.5	200	232	172	683	300	OC	IR	11.1	211
50/60Hz	FL2088-T*	8.8	263	290	226	898	300	OC	IR	11.1	211
	FL0634-R*	3.4	98	84	335	270	St	RSR	8.0	179	
	FL0739-R*	3.9	115	99	393	270	St	RSR	8.0	179	
	FL0845-R*	4.5	122	105	417	240	St	RSR	8.7	180	
220V	FL1052-R*	5.2	150	129	512	240	St	RSR	8.9	180	
60Hz	FL1152-R*	5.2	155	133	529	270	St	RSR	8.1	179	
	FL1262-R*	6.2	162	139	553	320	St	RSR	9.8	195	
	FL1462-R*	6.2	207	178	707	300	St	RSR	10.6	196	
	FL1568-R*	6.8	228	196	778	310	St	RSR	10.5	200	
	FL1568-R*	6.8	181	155	618	300	St	RSCR	11.5	216	
	FL1875-R*	7.5	238	204	813	300		OC	RSR	11.1	216
	FL0634-S*	3.4	95	82	324	240	St	RSCR	9.0	180	
	FL0634-S*	3.4	82	70	280	270	St	RSR	7.8	179	
	FL0734-S*	3.4	95	82	326	240	St	RSCR	9.0	180	



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_FL1152-RGTélécharger

Mbsm.pro, PDF, DAEWOO COMPRESSOR, HPL23YH-5, 199W, 1/4 Hp, R134A , 90G

Category: Files

written by www.mbsm.pro | 16 February 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_HPL23YH-5Télécharger](#)

[Mbsm_dot_pro_private_PDF_HPL23YH-5-2Télécharger](#)





Private Picture Copyright: WWW.MBSM.PRO

DAEWOO COMPRESSOR, HPL23YH-5, 199W,
1/4 Hp, R134A , 90G, CONGELATEUR, No-
Frost, ENIM, ALGERIE, REFREGERATEUR,
FR 4506, FR 4506 K, FR-4506K, Classe
N, Volume Brut 447L , Volume utile
273L, Volume congélat 101L , 220-240v
50Hz

Category: compressor

written by www.mbsm.pro | 16 February 2021

1. OUTLINE

DIVISION		CONTENTS
MODEL NAME		FR4506K/N
USABLE CAPACITY(l)	FREEZER	101
	REFRIGERATOR	273
	TOTAL	374
EXTERNAL DIMENSION	WIDTH	708mm
	DEPTH	706mm
	HEIGHT	1715/1759mm
REFRIGERANT	R134a	90g
COOLING & CONTROL SYSTEM	COOLING SYSTEM	Fan Cooling System
	DEFROST SYSTEM	Fin Evaporator Forced
	DEFROST CONTROL	Automatic Start & Stop
NET WEIGHT(Kg)		69kg

Private Picture Copyright: WWW.MBSM.PRO

Capacité totale 374 L

Compartiment denrées fraîches 273L

Compartiment denrées congelées 101L

Dimensions (mm) – Sans emballage : 1759X706X708mm

– Avec emballage : 1801X726X754mm Poids

net (kg) : 78Kg

Brut (kg) : 69Kg

Contrôle des températures Thermostat

Type de refroidissement : No Frost (Dynamique)

Éclairage intérieur

Alimentation : 220-230/50/HZ

Consommation d'énergie (kwh / an) 520

Classe énergétique B

Classe climatique : Tempérée T

CFC 0 %

Réfrigérant R134 A




 Fabriqué en Algérie	
Réfrigérateur-Congélateur	****
Modèle FR-4506K	Classe N
Volume brut	447L
Volume utile compt denrées fraîches	273L
Volume utile compt basse température	101L
Voltage / Fréquence	220-240V - 50Hz
Puissance	
Puissance de dégivrage	160W
Puissance de lampe	15W*1
Consommation d'énergie(kwh/24h)	1.42
Réfrigérant R134a	90 grs
N° de série	
Code : Q376-29-1	


 FR-4506K




Picture Copyright : WWW.MBSM.PRO

ENIEM		Fabriqué en Algérie
Réfrigérateur-Congélateur	****	
Modèle FR-4506K		Classe N
Volume brut	447L	
Volume utile compt denrées fraîche	273L	
Volume utile compt basse température	101L	
Voltage / Fréquence	220~240V -- 50Hz	
Puissance		
Puissance de dégivrage	160W	
Puissance de lampe	15W*1	
Consommation d'énergie(kwh/24h)	1.42	
Réfrigérant R134a	90 grs	
N° de série		
Code : Q376-29.1		



Private Picture Copyright : WWW.MBSM.PRO

1. OUTLINE

DIVISION		CONTENTS
MODEL NAME		FR4506K/N
USABLE CAPACITY(l)	FREEZER	101
	REFRIGERATOR	273
	TOTAL	374
EXTERNAL DIMENSION	WIDTH	708mm
	DEPTH	706mm
	HEIGHT	1715/1759mm
REFRIGERANT	R134a	90g
COOLING & CONTROL SYSTEM	COOLING SYSTEM	Fan Cooling System
	DEFROST SYSTEM	Fin Evaporator Forced
	DEFROST CONTROL	Automatic Start & Stop
NET WEIGHT(Kg)		69kg

Private Picture Copyright : WWW.MBSM.PRO



HEL23YG-3B
② ② ② ② ① ② ②

NO	CONTENTS	
① Refrigerant	H : R134a I : R600a No marking : R12	
② Motor type	PTC	100V Series F : RSIR E : RSCR C : CSIR B : CSR 220V Series S : RSIR P : RSCR K : CSIR D : CSR
	C-relay	100V Series R : RSIR N : CSIR 220V Series T : RSIR G : CSIR
③ Application	L : L B P H : H B P	
④ Grade of Cooling Capacity	(reference : table of capacity range)	
⑤ Series name	JE Y YE YH YG	
⑥ Voltage & Frequency	No marking : 100V 50/60Hz	
	1 : 110-115V 60Hz	5 : 220-240V 50Hz
2 : 127V 60Hz	7 : 115-127V 60Hz	
3 : 110V 60Hz	8 : 220-240V 50Hz / 220V 60Hz	
4 : 220V 60Hz	9 : 110V 50Hz	
⑦ Improvedata order		

Private Picture Copyright : WWW.MBSM.PRO

Model	Cooling Capacity			Efficiency			Motor Type	Cooling Type	NetWeight [kg]	OilQty. [cc]
	Kcal/h	Watt	Btu/h	EFF Kcal/Wh	COP W/W	EER Btu/Wh				
HPL21YE-5-K	155	180	615	1.00	1.16	3.97	RSCR	ST/OC/FC	9	290
HPL21YE-5-L	155	180	615	1.04	1.2	4.11	RSCR	ST/OC/FC	8.9	290
HSL21YE-5	155	180	615	1.04	1.21	4.13	RSIR	ST/OC/FC	9	290
HPL23YE-5	171	199	635	1.1	1.27	4.35	RSCR	ST/OC/FC	9.5	290
HPL23YE-5-K	171	199	679	1.14	1.19	4.52	RSCR	ST/OC/FC	9	290
HSL23YE-5	171	199	679	1.06	1.16	4.21	RSIR	ST/OC/FC	9.3	290
HGH23YE-5	581	676	2306	1.94	2.25	7.69	CSIR	OC/FC	9.3	290
HKL25YE-5	180	209	714	0.97	1.19	3.84	CSIR	ST/OC/FC	9.5	290
HPL25YE-5-K	180	209	714	1.22	1.29	4.86	RSCR	ST/OC/FC	9	290
HPL25YE-5-L	180	209	714	1.07	1.31	4.23	RSCR	ST/OC/FC	9	290
HGH25YE-5	631	734	2504	1.88	2.19	7.47	CSIR	OC/FC	9.5	290
HKL27YE-5	210	244	833	1.01	1.17	4.27	CSIR	ST/OC/FC	9.5	290
HPL27YE-5	210	244	833	1.01	1.31	4.63	RSCR	ST/OC/FC	9.5	290
HPL27YE-5-K	210	244	833	1.01	1.2	4.90	RSCR	ST/OC/FC	9	290
HSL27YE-5	210	244	833	1.01	1.2	4.32	RSIR	ST/OC/FC	9.5	290
HSL27YE-5A	210	244	833	1.01	1.22	4.32	RSIR	ST/OC/FC	9.5	290
HKH27YE-5	732	851	2817	1.92	2.23	7.61	CSIR	OC/FC	9.5	290
HSH27YE-5	732	851	2817	1.88	2.19	7.47	RSIR	OC/FC	9.5	290
HKL30YE-5	230	267	913	1.01	1.1	3.61	CSIR	ST/OC/FC	9.5	290
HPL30YE-5-K	230	267	913	1.01	1.28	4.75	RSCR	ST/OC/FC	9	290
HSL30YE-5	230	267	913	1.01	1.05	3.61	RSIR	ST/OC/FC	9.5	290
HSH30YE-5	780	907	3095	1.01	2.13	6.57	RSIR	OC/FC	9.5	290
HKL30YE-5	230	267	913	1.01	1.1	3.61	CSIR	ST/OC/FC	9.5	290
HPL30YE-5-K	230	267	913	1.01	1.28	4.41	RSCR	ST/OC/FC	9	290
HSL30YE-5	230	267	913	1.01	1.05	3.61	RSIR	ST/OC/FC	9.5	290

Private Picture Copyright : WWW.MBSM.PRO

2. ELECTRIC PARTS

1) COMPRESSOR

REFRIGERANT	R-12						
VOLTAGE(V/Hz)	110/60	115,120/60	127/60	220/60	220/50	230/50	240/50
COMP MODEL	X	X	CL23YE-2	PL21YE-4	SL27YE-5		
PART CODE	X	X	3957123A20	3956121A40	3954127A50		
STARTING TYPE	X	X	CSIR	RSCR	RSIR		

REFRIGERANT	R-134a						
VOLTAGE(V/Hz)	110/60	115,120/60	127/60	220/60	220/50	230/50	240/50
COMP MODEL	HEL18YH-1	<	HEL21YH-1	X	HPL23YH-5	<	<
PART CODE	3953118S10	<	3953121S10	X	3956123S50	<	<
STARTING TYPE	RSCR	<	RSCR	X	RSCR	<	<

2) RELAY

REFRIGERANT		R-12						
VOLTAGE(V/Hz)		110/60	115,120/60	127/60	220/60	220/50	230/50	240/50
ASSY	TYPE NAME	X	X	414THBYY-52	197SHBYY-52	232THBYY-52	<	<
	PART CODE	X	X	3018120700	3018118130	3018119970	<	<
PTC	RESISTANCE	X	X	S068	S330	S220	<	<
OVER LOAD	PART NAME	X	X	414THB	197SHB	232THB	<	<

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_HPL23YH-5Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-2Télécharger
Mbsm_dot_pro_private_PDF_HPL23YH-5-3Télécharger