Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions,Tester ok
written by www.mbsm.pro | 12 October 2018



Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V
Compresseur hermetique de Aspera – Embraco NT6220Z – R134a
3/4 HP
220V 50Hz 1~
Cylindrée = 22.37 CM3
APPLICATIONS = HBP
Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP

• ASPERA
SKU: 3070180
Suitable For/Compatible With
• NT6220Z ASPERA
• NT6220Z-CSIR ASPERA
• NT6220Z EMBRACO
• NT6220Z-CSIR EMBRACO




embraco NT



R134a HBP

PictureS Mbsm Dot Pro : www.mbsm.pro

EM/NE/NT/NJ

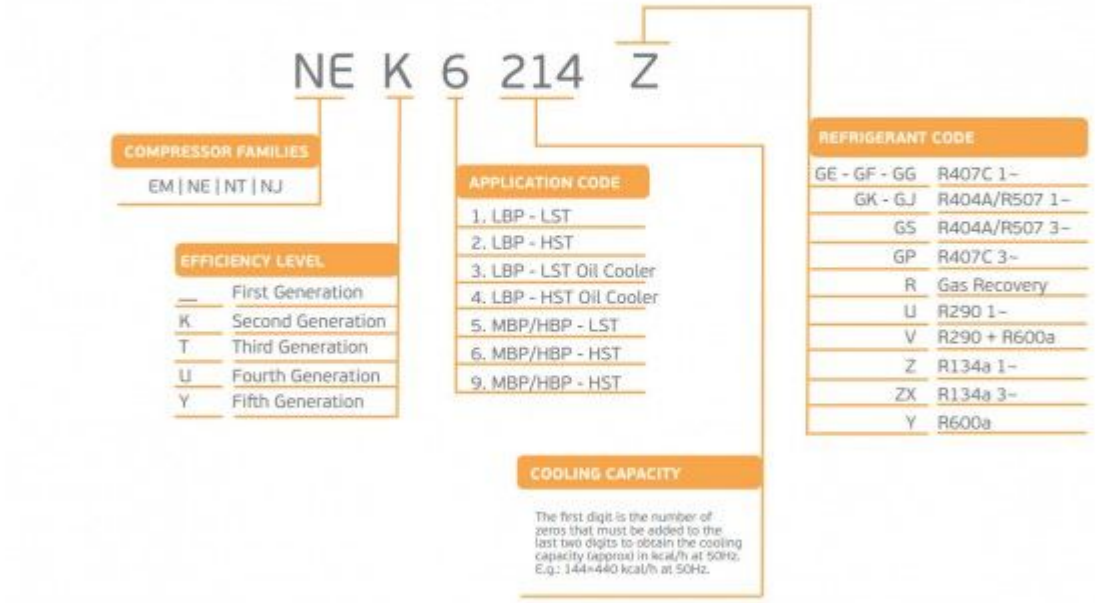


PictureS Mbsm Dot Pro : www.mbsm.pro

50Hz 50-60Hz	R134a							
	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W

Category: Solutions,Tester ok
written by Jamila | 12 October 2018

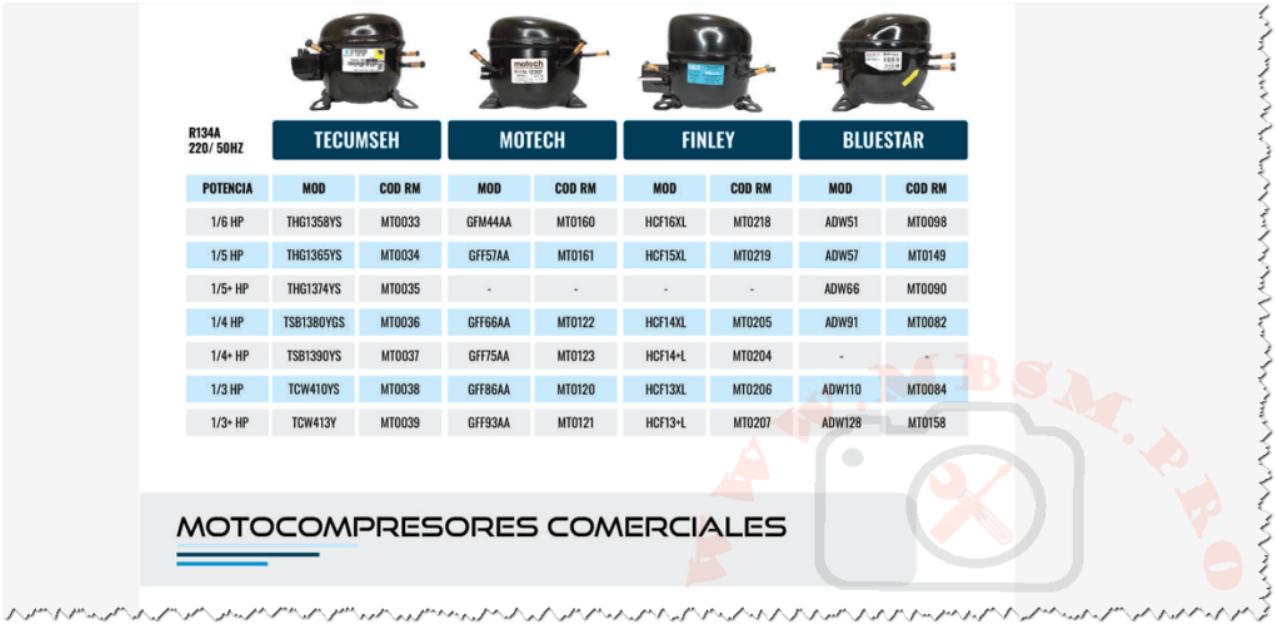

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Zel gml200a gml180a gml160g gml140a

gml110a r134a Compressors

- **gml200a 152W**
- **GML180A 144W**
- **gml160g 129W**
- **gml140a 108W**
- **GML110A 90W**

Place of purchase:
Mainland China

Brand:
West of Monza

Color classification:
gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W


Refrigeration Agent:
R134a

Voltage:
220-240V 50HZ

Working conditions:
Low back pressure



PictureS Mbsm Dot Pro : www.mbsm.pro

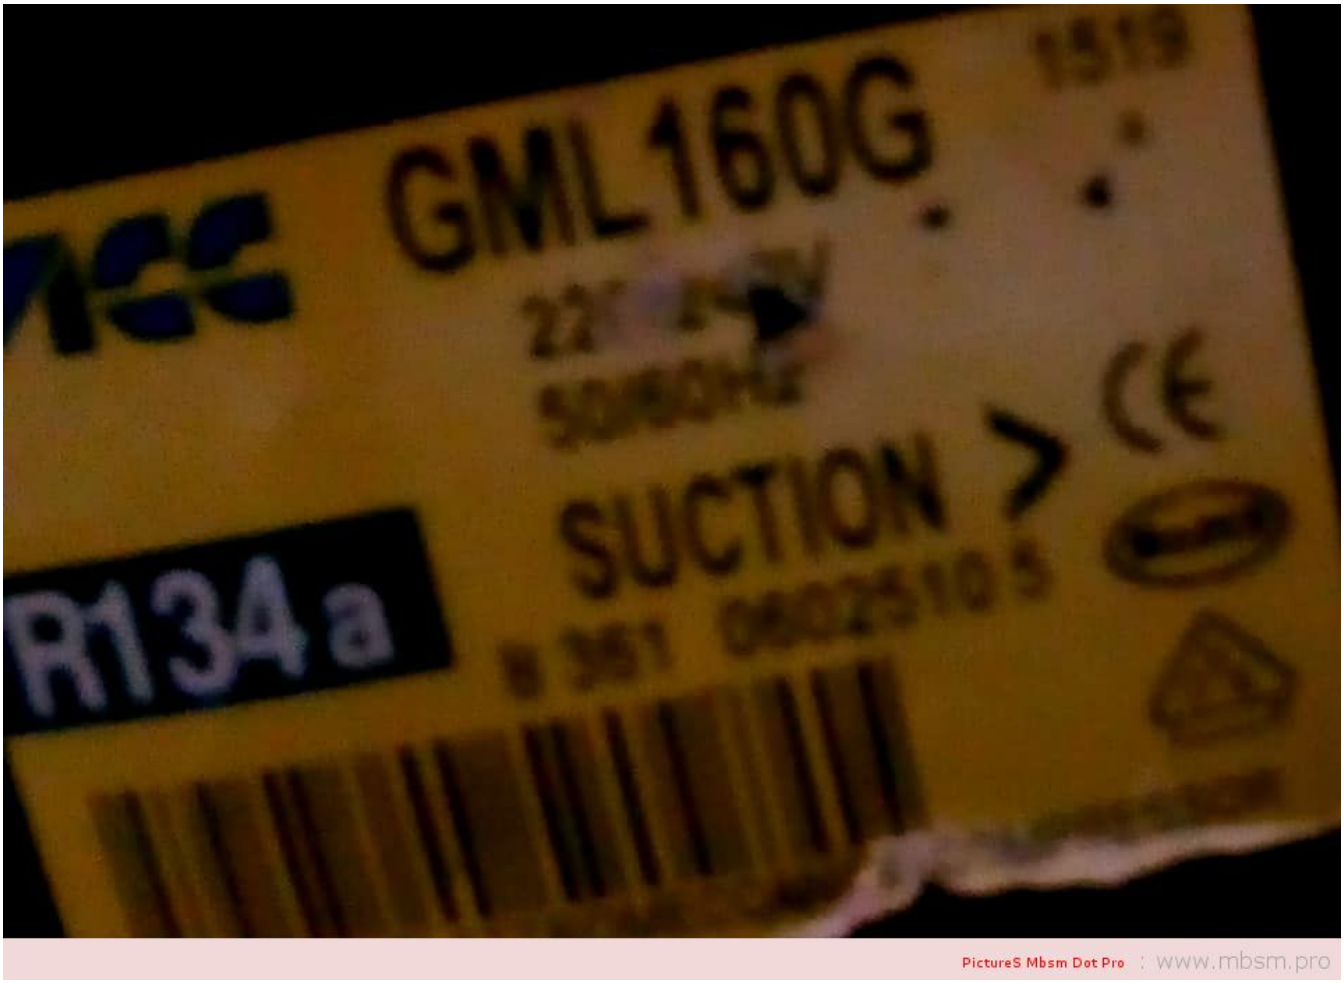


Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg, 1/4HP++, 1/3 hp– cylinder capacity 9,3cm³, 260 W,

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg 1/4HP cylinder capacity 9,3cm³

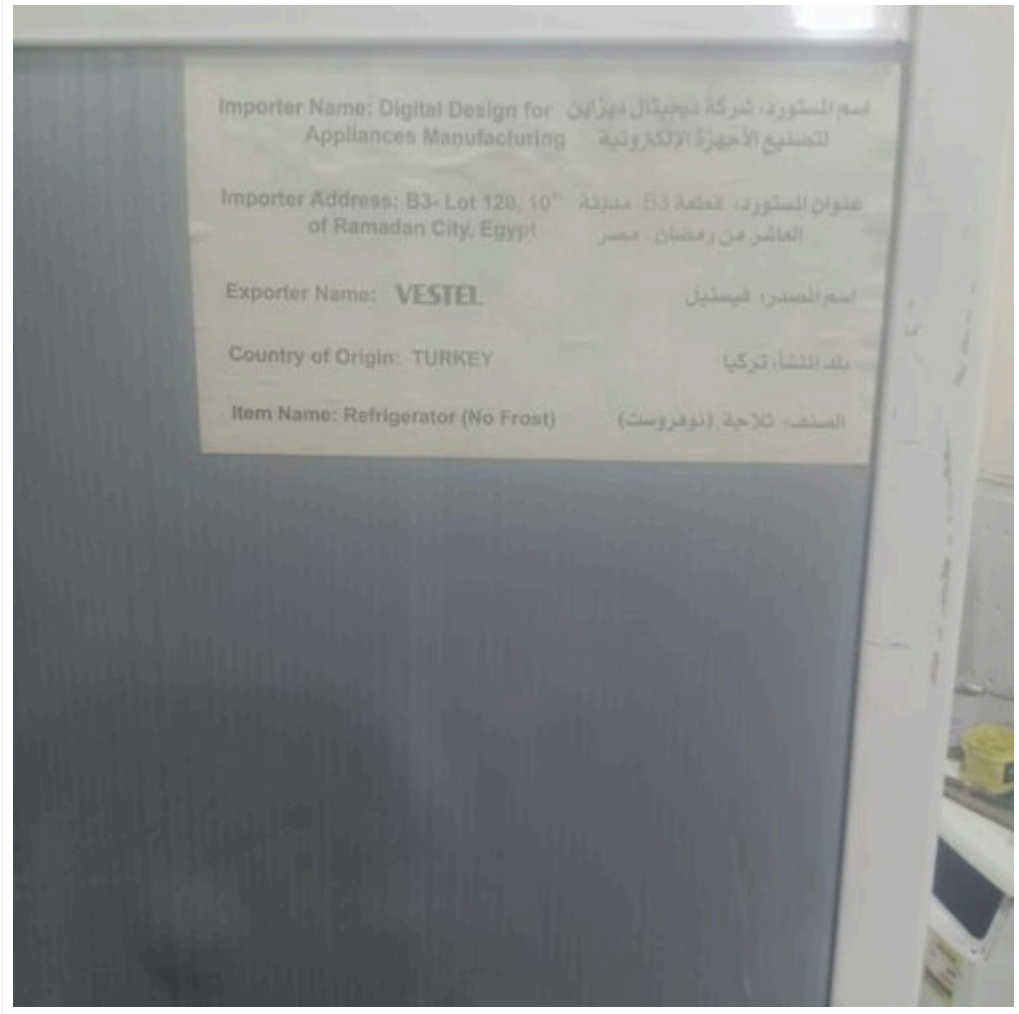





refrigerant	R134a
type	GTH93AA
voltage	220-240 V

frequency	50 Hz
application	MBP
weight	9,8 kg
power	1/4 HP
cylinder capacity	9,3 cm³
motor system	RSIR/RSCR
height	184 mm
power at -20°C	– W
power at -15°C	– W
power at -10°C	– W
power at -5°C	– W
power at 0°C	– W
power at +5°C	– W

Mbsm_dot_pro_private_PDF_GTH93AA-compresseur-acc-cubigell-gl99aaTélécharger
Mbsm_dot_pro_private_PDF_catalog_zelTélécharger

Mbsm.pro, ATA72XL,Lbp compressor, HuaGuang coolant, R134a, 220-240V 50/60Hz, 1/4HP, 1PH, 205 w, Lbp

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a , 220-240V 50/60Hz , 1/4HP , 1PH
Détails rapides

Lieu d’origine:
Guangdong, Chine

Marque:
Wanbao

Type:
Compresseur de réfrigération

Application:
Pièces de réfrigération

Certification:
ce, CCC / CB / VDE

Réfrigérant:
R134A

Marque:
Wanbao

Tension:
220-240V 50HZ

Déplacement:
72 cm3

Refroidissement:
ST / OC

Type de moteur:
RSIR

Capacité de refroidissement:
185 W

Capacité:
631 BTU

Max. Hauteur “A”:
188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des

équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l'étranger-Italie ACC, puis a fondé l'italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l'internationalisation du marché à l'internationalisation de la fabrication et jette des bases solides à l'internationalisation de la marque pour la prochaine étape.
La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d'unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d'appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d'appareils électroménagers haut de gamme.

Modèle	Réfrigérant	Tension	Capacité de refroidissement (w)	Application	COP (w / w)
AS43	R134a	220V / 50Hz	84	LBP	0,94
AS51	R134a	220V / 50Hz	107	LBP	1,01
ASD43K	R134a	220V / 50Hz	117	LBP	1.13
ASD53K	R134a	220V / 50Hz	144	LBP	1.2
ASD65	R134a	220V / 50Hz	173	LBP	1,23
ATA72X	R134a	220V / 50Hz	205	LBP	1,35
ATA80X	R134a	220V / 50Hz	230 1/4 hp++	LBP	1,35
ANA90	R134a	220V / 50Hz	255	LBP	1,35
AQAW110	R134a	220V / 50Hz	260	LBP	1,15
ANA120	R134a	220V / 50Hz	345	LBP	1,3

Autre compresseur de congélateur wanbao que nous avons:

Pas	HP	Modèle	Réfrigérant	Qté/Une Palette
1	1/10HP	ASD35K	R134a	100
2	1/6HP	ASD53K	R134a	80
3	1/5HP	AQAW66X	R134a	80
4	1/4HP	AQAW77X	R134a	80
5	1/4HP Gros	AQAW91	R134a	80
6	1/3HP	AQAW110	R134a	80
7	3/8HP	AL120	R134a	80
8	1/2HP	AL150	R134a	80
9	1/2HP, grand	AL180	R134a	80

型号 Model	气缸容积 Displacement	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity			COP			认证 Certification	最大高度"A" Max. Height "A"
				ASHRAE		CECOMAF	ASHRAE		CECOMAF		
				-23.3℃		-25℃	-23.3℃		-25℃		
	cm³			W	Btu	W	W/W	EER	W/W		
LBP											
220-240V 50HZ R134a											
T系列 T Series											
ATA72X	7.2	ST/OC	RSIR	205	699	155.3	1.35	4.6	1.05	CCC/CB/VDE	185/188
ATA80X	8.1	ST/OC	RSIR	230	785	174.2	1.35	4.6	1.05	CCC/CB	185/188
ATK72X	7.2	ST/OC	RSCR	205	699	154.0	1.40	4.8	1.09	CCC/CB/VDE/CE	185/188
ATK80X	8.1	ST/OC	RSCR	230	785	174.0	1.40	4.8	1.09	CCC/CB	185/188
▲ATD50V	5.0	ST	RSIR	140	478	105.2	1.25	4.3	0.98	CCC/CB	182
ATD66X	6.6	ST/OC	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
△ATA50K	5.0	ST	RSIR	144	491	108.9	1.35	4.6	1.05	CCC/CB	182/185
△ATA66K	6.6	ST	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
ATA66K(OC)	6.6	OC	RSIR	190	648	143.7	1.35	4.6	1.05	CCC/CB	188
ATA72K(OC)	7.2	OC	RSIR	205	699	154.0	1.35	4.6	1.05	CCC/CB	188
ATK55	5.5	ST	RSCR	160	546	121.0	1.35	4.6	1.05	CCC/CB	185
ATK60	6.0	ST	RSCR	180	614	135.0	1.51	5.2	1.18	CCC/CB/CE	185
ATK66	6.6	ST	RSCR	192	655	144.0	1.55	5.3	1.21	CCC/CB/CE	185

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ATA72X-220-240V_50HZ_R134A-1Télécharger



PictureS Mbsm Dot Pro : www.mbsm.pro
Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Mbsm.pro, GL90TB , COMPRESSEUR ACC CUBIGEL ELECTROLUX, R134A ,1/4HP 230V

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Mbsm.pro, GL90TB , COMPRESSEUR ACC CUBIGEL ELECTROLUX, R134A ,1/4HP 230V

- Puissance en cheval 1/4 CV
- Alimentation 220-240 V 50 Hz
- Gaz R134a HMBP
- Cylindrée du compresseur 8,8 cm³
- Température d’utilisation max. 32°C
- Complet avec starter, condensateur, boitier et système de fixation

La photo montre l’aspect du compresseur, pas son étiquette réelle



Codes fabricants

- ACC-GL90TB
- ALPENINOX-83718
- ANGELO PO-34D6510
- CEM-340
- CUBIGEL-GL90TB
- DEXION-022260-00
- ELECTROLUX-83718
- FRIULINOX-995783
- ICEMATIC-19165548
- MARENO-25016599
- MONDIAL ELITE-4106073
- MONDIAL ELITE-4106073+1147212
- NECTA VENDING-986934
- ZANUSSI-83718

Documentation technique du compresseur frigorifique Cubigel ***regarder en dessous***



Mbsm.pro, DAEWOO Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Mbsm.pro, DAEWOO Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h

---

Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz



MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

Test conditions	According to ASHRAE
Evaporating temperature	-23.3□
Condensing temperature	54.4□
Subcooling temperature	32.2□
Suction temperature	32.2□
Ambient temperature	32.2□
Working condition limit:R134a	
Max ambient temperature	43[□]
Evaporation temperature range	-35~-15[□]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[□]
Max discharge temperature	125[□]
Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.4/0.4Mpa(gauge pressure)187V/98V

Product model:HYE69YL
Cooling capacity:195W
COP□W/W□:1.15
Voltage□V□:220-240~
Frequency(Hz):50



PictureS Mbsm Dot Pro : www.mbsm.pro

- Products
- R134a Compressor (LBP)
  - HYE Serie
  - HY Serie
  - HYB Serie
  - HYS Serie
- R600a Compressor (LBP)
  - HYE Serie
  - HY Serie
  - HYB Serie
  - HYS Serie
- R134a Compressor (MBP,HBP)
  - HY Serie
  - HYE Serie
- Newest Catalog Download

www.mbsm.pro



Product model:HYE69YL
Cooling capacity:195W
COP（W/W）:1.15
Voltage（V）:220-240~
Frequency(Hz):50

Test conditions	According to ASHRAE
Evaporating temperature	-23.3℃
Condensing temperature	54.4℃
Subcooling temperature	32.2℃
Suction temperature	32.2℃
Ambient temperature	32.2℃
Working condition limit:R134a	
Max ambient temperature	43[℃]
Evaporation temperature range	-35~-15[℃]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[℃]
Max discharge temperature	125[℃]
Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.4\0.4Mpa(gauge pressure)187V/98V

PictureS Mbsm Dot Pro : www.mbsm.pro



AE 1330 Y

1 / 12 HP



AE 1340 Y

1 / 6 HP



AE 1350 Y

1 / 6 HP

www.mbsm.pro



AE 1360 Y

1 / 5 HP



AE 1370 Y

1 / 4 HP



AE 1390 Y

1 / 4 HP

PictureS Mbsm Dot Pro : www.mbsm.pro



HY 81 Y

1 / 4 HP



HYE 55 YL 63

1 / 6 HP



HYE 60 YL 63

1 / 5 HP



HYE 69 YL

1 / 4 HP



HYE 125 MSU

1 / 4 HP

www.mbsm.pro

PictureS Mbsm Dot Pro : www.mbsm.pro

Huayi HYE 69 YL 1/4 Hp 168Kcal R134a 220V

Huayi - Huayi

Huayi HYE 55 YL 63 1/6 Hp 129Kcal R134a 220V

Huayi - Huayi

Huayi HYE 60 YL 63 1/5 Hp 146Kcal R134a 220V

Huayi - Huayi

Huavi HY 81 Y 1/4+ Hp 202Kcal R134a 220V

PictureS Mbsm Dot Pro : www.mbsm.pro

HYE 125 MSU

HYE 69 YL

HYE 60 YL 63

HYE 55 YL 63

HY 81 Y

AE 1390 Y

AE 1370 Y

AE 1360 Y

AE 1350 Y

AE 1340 Y

AE 1330 Y

PictureS Mbsm Dot Pro : www.mbsm.pro



Private Picture Copyright : WWW.MBSM.PRO



Mbsm.pro , COMPRESSOR TECUMSEH, CAJ4511Y, R134a, HMBP(HBP – High Back Pressure),1 HP, 1PH, 220-240 VOLTS , High Start Torque (HST) ,

Category: Solutions,Tester ok
written by Jamila | 12 October 2018



Mbsm.pro , COMPRESSOR TECUMSEH,

L’unite hermetique Compressor

CAJ4511Y, R134a, HMBP(HBP – High Back Pressure),1 HP, 1PH, 220-240 VOLTS , High Start Torque (HST)
Condensateur Perm./ Run capacitor : 15 µF / 400 V

Données techniques

- Modèle: **CAJ4511Y**
- Gaz: **R-134a**
- Température/Pression: **Haute Pression**
- Puissance: **1 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **32.7 cm³**
- Cons.Énergie -5ºC: **920 W**
- Cons.Énergie 0ºC: **1030 W**
- Cons.Énergie +5ºC: **1140 W**
- Cons.Énergie +10ºC: **1250 W**
- T° De Condensation: **55 °C**
- Capacidad Frigorífica -5°C: **1376 Kcal/h**
- Capacidad Frigorífica 0°C: **1737 Kcal/h**
- Capacidad Frigorífica 5°C: **2150 Kcal/h**
- Capacidad Frigorífica 7.2°C: **2347 Kcal/h**
- Capacidad Frigorífica 10°C: **2614 Kcal/h**
- Tipo Test: **EN.12900**



PictureS Mbsm Dot Pro : www.mbsm.pro


PictureS Mbsm Dot Pro : www.mbsm.pro