

# Mbsm.pro, Compressor, Copeland, ZR90K3-TWD-551, ZR90K3TWD551, 7.5 Hp, R22, 380-420/3/50Hz

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, Copeland, ZR90K3-TWD-551, ZR90K3TWD551, 7.5 Hp, R22, 380-420/3/50Hz

# Mbsm.pro, Compressor, Bristol, Compressor, H20J283ABC, 28000 BTU/HR, H29B18UABCC, 20000 BTU/HR, H29B18UABH, 18000 BTU/HR, H29B35UABCA, 35000 BTU/HR, R22, 1 PH, 208/230 V

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsmpro, Compressor, Bristol, Compressor, H20J283ABC, 28000 BTU/HR, H29B18UABCC, 20000 BTU/HR, H29B18UABH, 18000 BTU/HR, H29B35UABCA, 35000 BTU/HR, R22, 1 PH, 208/230 V

Mbsm.pro, Compressor, CRJQ-0300-PFV-593, CRJQ 0300, Copeland, 3-1/4 HP, 208-230V, 1 PH, R22, R407C, Hermetic Compressor, 3300BTU, 9170W

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022

**Copeland**  MODEL MADE IN U.S.A. MARCA REGISTRADA

**CRJQ-0300-PFV-593**



SERIAL **96D45450H**      07535-030

 **F3D**

THERMALLY PROTECTED

OIL	MO	PRO	VOLTS		PH	HZ	LRA
55	E	U	208	230	1	60	93.0
MIN			200			50	

Mbsm.pro, Compressor, CRJQ-0300-PFV-593, CRJQ 0300, Copeland, 3-1/4 HP,  
208-230V, 1 PH, R22, R407C, Hermetic Compressor, 3300BTU, 9170W


---

**Mbsm.pro, Siam, Rotary, Compressor,  
R22, RH277-VHAT, RH277VHAT, 1.74 HP,  
220v, 2040w**

Category: Non classé

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022

05  
RH277VHAT

 **REFRIGERANT COMPRESSOR**  
**MODEL RH277VHAT**

DATE 05052001	PHASE 1
VOLT AC 220-240	
FREQ. 50 Hz	L.R.A. 33/35
REFRIGERANT R-22	OIL MS-56
AP 28 $\text{kg/cm}^2$	SP 84

RH277VHAT A0021720JA  
LICENSED BY MITSUBISHI ELECTRIC  
SIAM COMPRESSOR INDUSTRIES CO., LTD.

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Siam, Rotary, Compressor, R22, RH277-VHAT, RH277VHAT, r22, 1.74 HP, 220v, 2040w

# Mbsm.pro, TECUMSEH, Compressor, Condensing, Units, AHC4540EFZ, FH4540F, FH4524F, FH4528F, FH4531F, FH4540F, R22, 3-1/2 HP, hbp, CSR, 220V ~ 50HZ

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022



Mbsm.pro, TECUMSEH, Compressor, Condensing, Units, AHC4540EFZ, FH4540F, FH4524F, FH4528F, FH4531F, FH4540F, R22, 3-1/2 HP

---

# Mbsm.pro, Danfoss, Compressor, MT100HS4D, 8.3HP, R22, 380V, 3PH

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)


Mbsm.pro, Danfoss, Compressor, MT100HS4D, 8.3HP, R22, 380V, 3PH

---

Mbsm.pro, Scroll, Danfoss,  
HRP051T4LP6, compressors, Hermetic,  
49.15 kBtu/h, R22, R407C, 4 1/4Hp,  
3Ph, POE, Lra 60A

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022

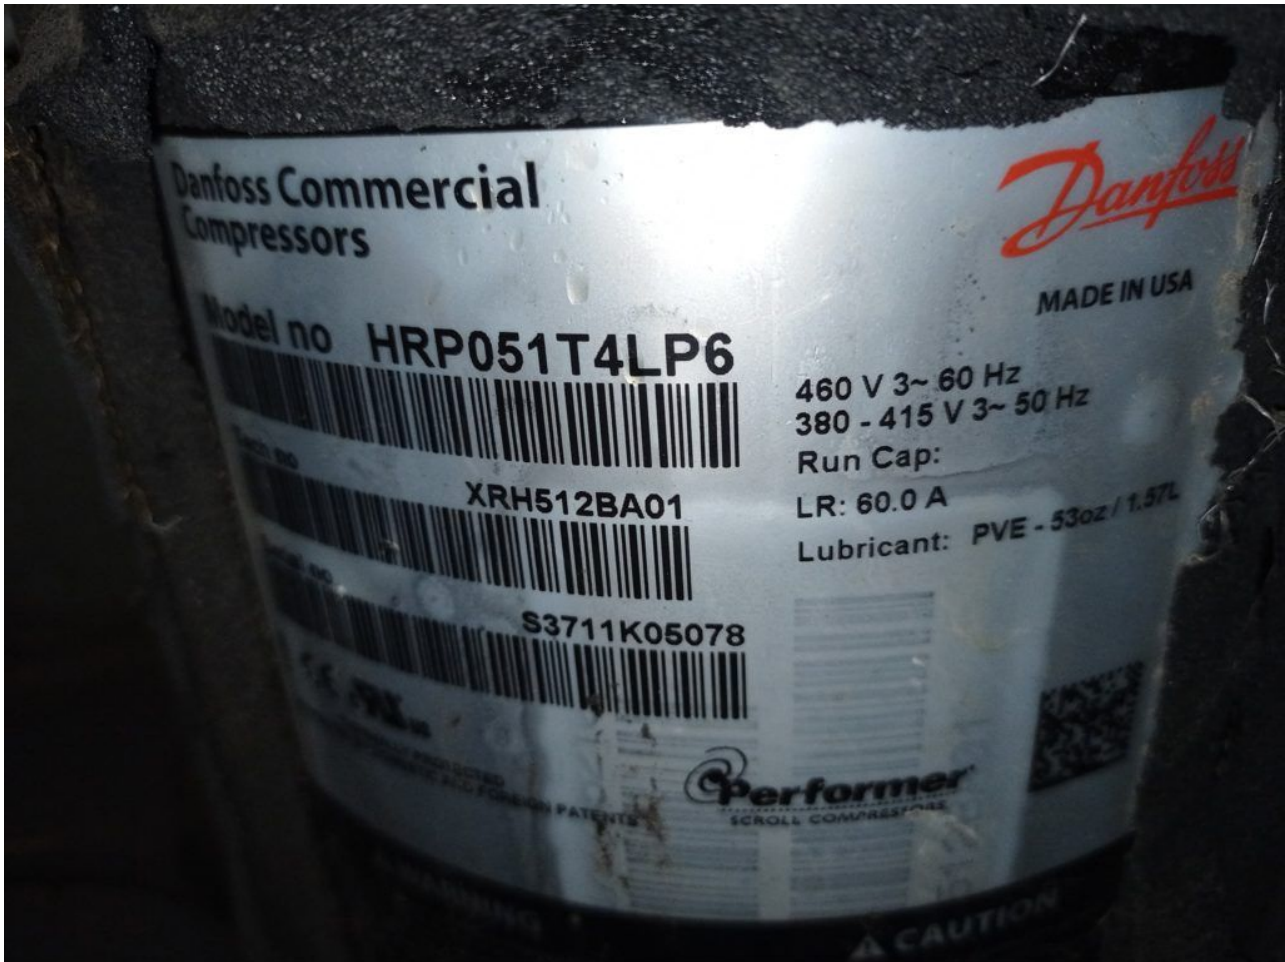

Private Picture Copyright: WWW.MBSM.PRO

bsm.pro, Scroll, Danfoss, HRP051T4LP6, compressors, Hermetic, 49.15 kBtu/h, R22, R407C, 4 1/4Hp, 3Ph, POE, Lra 60A

---

Mbsm.pro, Danfoss, Compressor,  
SM160T4RC, SM-160, 13hp, 3ph, R22,  
133500BTU

Category: compressor

written by www.mbsm.pro | 7 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

SM160T4RC

## Basic Info.

Model NO.Sm160N.W.90kgTransport PackagePackage: Wooden Case/Pallet or as Your RequirementSpecificationSM series SM090TrademarkperformerOriginFranceHS Code8414301300Production Capacity50000 Sets/Year

## Product Description

SM-160 Performer Scroll compressor for R22  
 13HP Performer Scroll Compressor SM160  
 SPECIFICATIONS FOR SM160

Products Details	Models: SM160 Type	Hermetic
Power	Phase	3
Horse Power	HP	13
Main performance parameters	Input Power	W 380-420/3/60
REFRIGRANT		R22
SIZE		54.0/35.0
Physcial parameters	Hight	MM 353
Weight	KG	90
Q'ty / Pallet	PIECE	6

### Product Description

5.Techincal sheet as below:

50Hz  
Data

Model	Nominal Cap.60HZ	Nominal cooling capacity	Power input	Cop	E.E.R.	Swept Volume	Displacement	Oil charge	N.W.
TR	W	Btu/h	KW	W/W	Btu/h/W	cm/rew	m/h	dm	kg
SM084	7	20400	69600	6.12	3.33	11.4	114.5	19.92	3.3 64
SM090	7.5	21800	74400	6.54	3.33	11.4	120.5	20.97	3.3 65
SM100	8	23100	79000	6.96	3.33	11.3	127.2	22.13	3.3 65
SM110	9	25900	88600	7.82	3.32	11.3	144.2	25.09	3.3 73
SM112	9.5	27600	94400	7.92	3.49	11.9	151.5	26.36	3.3 64
SM115	9.5	28000	95600	8.31	3.37	11.5	155	26.97	3.8 78
SM120	10	30100	102800	8.96	3.36	11.5	166.6	28.99	3.3 73
SM124	10	31200	106300	8.75	3.56	12.2	169.5	29.5	3.3 64
SM125	10	30100	102800	8.93	3.37	11.5	166.6	28.99	3.8 78
SM147	12	36000	123000	10.08	3.58	12.2	193.5	33.7	3.3 67
SM148	12	36100	123100	10.8	3.34	11.4	199	34.6	3.6 88
SM160	13	39100	133500	11.6	3.37	11.5	216.6	37.69	4 90
SM161	13	39000	133200	11.59	3.37	11.5	216.6	37.69	3.6 88
SM175	14	42000	143400	12.46	3.37	11.5	233	40.54	6.2 100

## Product details

**Gross weight** 102 kg

**Net weight** 90 kg

**EAN** 5702428980432

**Approval standard**

CE  
UL

**Brand technique**

After sale

**Capacity control**

Fixed speed

**Colour**

Blue

Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Description	SM160-4
Diameter [mm]	266 mm
Discharge connection height [mm]	596 mm
Discharge connection mounting torque [Nm]	110 Nm
Discharge connection pipe size [in]	7/8 in
Discharge connection rotolock size [in]	1 3/4 in
Discharge connection size [in]	1 3/4 in
Discharge connection sleeve pipe size [in]	7/8 in
Drawing number	8551120b
Economizer	No
Factory HP [bar]	33 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	C
Glass mounting	Threaded
Glass torque [Nm]	50 Nm
GP LP torque [Nm]	15 Nm
High side max pressure (Ps)	30.2 bar
High Side TS Max	150 °C
High Side TS Min	-35 °C
High Side Volume	1.7 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	440 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP54 (with cable gland)
Low side max pressure (Ps)	25 bar
Low Side TS Max	63 °C
Low Side TS Min	-35 °C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	342 V
Low value of voltage range at 60Hz [V]	414 V
LRA	150 A
Maximum Operating Current [MOC]	29 A
MMT	29 A
Model number	SM160T4RC

Motor protection	Internal thermostat, ext. overload protector needed
Mounting torque [Nm]	21 Nm
Nominal cooling capacity 60 kBTU/h	163.14 kBtu/h
Nominal cooling capacity at 50Hz	35.3 kW
Nominal cooling capacity at 60Hz	47.8 kW
Number of starts per hour [Max]	12
Oil charge [L]	4 L
Oil drain	1/4" flare
Oil drain torque [Nm]	35 Nm
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	48 Nm
Oil reference	160P
Oil type	Mineral
Packaging height [mm]	671 mm
Packaging length [mm]	470 mm
Packaging weight [Kg]	671 kg
Packaging width [mm]	370 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Screw 4.8 mm
Refrigerant	R22
Refrigerant charge [kg] [Max]	12.5 kg
Relief valve	None
Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets
Shipped instructions	Installation instructions
Shipped mounting	Mounting kit with grommets, bolts, nuts, sleeves and washers
Shipped oil	Initial oil charge
Suction connection height [mm]	180 mm
Suction connection mounting torque [Nm]	130 Nm
Suction connection pipe size [in]	1 3/8 in
Suction connection rotolock size [in]	2 1/4 in
Suction connection size [in]	2 1/4 in
Suction connection sleeve pipe size [in]	1 3/8 in
Swept volume [cm <sup>3</sup> ]	216.6 cm <sup>3</sup>
Technology	Scroll
Test dif [bar] [Max]	24 bar
Test HP [bar] [Max]	32 bar
Test LP [bar] [Max]	25 bar

Torque earth [Nm]	2 Nm
Torque Ebox cover [Nm]	2.3 Nm
Torque power [Nm]	3 Nm
Total height [mm]	631 mm
Type	SM
Type designation	Compressor
Viscosity [cP]	32 cP
Winding resistance for three-phase compressors with identical windings [Ohm]	0.94 Ohm



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_Sm160Tarc-  
meituo\_en\_made\_in\_china\_com\_product\_ENYJSPnUTrkR\_China\_Sm\_16Télécharger  
Mbsm\_dot\_pro\_private\_PDF\_SM-160-10993\_danfossTélécharger

# Mbsm.pro, Compressor, Hermetic, Tecumseh, AEZ9440T, R22, 1/3 hp++, MHBP

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022



## Basic Info.

Model NO.AEZ9440TLubrication StyleLubricatedCooling SystemAir CoolingCylinder ArrangementBalanced Opposed ArrangementCylinder PositionHorizontalStructure TypeClosed TypeCompress LevelSingle-StageRefrigerant TypeFreonTypeReciprocatingPerformanceLow NoiseDrive ModeElectricPower SourceAC PowerConfigurationStationaryMaterialCopperPiston TypeClosedTrademarkTecumseh HermetiqueTransport PackagePalletSpecificationCE / RoHsOriginChinaHS Code8414301900

## Product Description

Tecumseh Hermetique R134a / R404a/ R22 reciprocating compressor

Hermetique R22

HBP

For Air  
Conditioning  
Applications.

Features:

Anti Vibration  
mounts supplied

Charged with  
mineral oil and  
dry nitrogen

Crankcase  
heater on TAG  
models

Fan cooling  
required on all  
models

Specifications:

Capacity Rating

Basis: 35°C

Ambient, 11K

Return Gas

Superheat,

54.5°C

Condensing,

46.2°C Liquid

entering

Expansion

Valve.

Current FLA are

given at

nominal

voltage, rated

conditions and

7.2°C

Evaporating

Temperature.

Motor Types:

PSC = Permanent

Split

Capacitor, 1

Phase, 50 Hz.

220-240 Volt

3Ø: 3 Phase, 50

Hz, 400 Volt

Expansion

Device:

C = Capillary

Tube

C/V = Capillary

Tube or

Expansion Valve

R22 Hermetic

Model No.	Nominal HP	Displ. cm <sup>3</sup> /rev	Motor Type	Nominal Current FLA	Exp. Device	Oil Charge cm <sup>3</sup>	Connections: inches		
cm <sup>3</sup>	Discharge Proc.								
AE 5465E	1/2	12.05	PSC	3.2	C	450	3/8 Tube	1/4 Tube	3/8 Tube
AJ 5510F	3/4	18.6	PSC	5.2	C	887	3/8 Tube	1/4 Tube	1/4 Tube
AJ 5512E	1	21.75	PSC	5.9	C	887	3/8 Tube	1/4 Tube	1/4 Tube
AJ 5513E	1	24.2	PSC	6	C	887	3/8 Tube	1/4 Tube	1/4 Tube
AJ 5515E	1 1/4	25.95	PSC	7.2	C	887	1/2 Tube	5/16 Tube	1/4 Tube

AJ 5518E	1 1/2	32.7	PSC	9.3	C	887	1/2 Tube	5/16 Tube	1/4 Tube
AJ 5519E	1 1/2	34.45	PSC	9.96	C	887	1/2 Tube	5/16 Tube	1/4 Tube
FH 5522E	1 3/4	39.95	PSC	9	C	1330	5/8 Tube	3/8 Tube	5/16 Tube
TFH 5522E	1 3/4	39.95	3Ø	3.8	C/V	1330	5/8 Tube	3/8 Tube	5/16 Tube
FH 5524E	2	43.5	PSC	10	C	1330	5/8 Tube	3/8 Tube	5/16 Tube
TFH 5524E	2	43.5	3Ø	4	C/V	1330	5/8 Tube	3/8 Tube	5/16 Tube
FH 5527E	2 1/4	49.1	PSC	12	C	1330	5/8 Tube	3/8 Tube	5/16 Tube
TFH 5527E	2 1/4	49.1	3Ø	4.2	C/V	1330	5/8 Tube	3/8 Tube	5/16 Tube
FH 5531E	2 1/2	56.65	PSC	14.1	C	1330	3/4 Tube	3/8 Tube	5/16 Tube
TFH 5531E	2 1/2	56.65	3Ø	8	C/V	1330	3/4 Tube	3/8 Tube	5/16 Tube
FH5540E	3	74.25	PSC	18.6	C	1330	3/4 Tube	3/8 Tube	5/16 Tube
TFH 5540E	3	74.25	3Ø	6	C/V	1330	3/4 Tube	3/8 Tube	5/16 Tube
TFH 5540E	3	74.25	3Ø	6	C/V	1330	78	1/2 Valve	5/16 Tube
TAG 5546E	3 3/4	90.2	3Ø	6.6	C/V	1960	7/8 Tube	1/2 Tube	3/8 Tube
TAG 5553E	4	100.7	3Ø	7.4	C/V	1960	7/8 Tube	1/2 Tube	3/8 Tube
TAG 5561E	5	112.5	3Ø	9	C/V	1960	7/8 Tube	1/2 Tube	3/8 Tube
TAG 5568E	6	124.4	3Ø	9.6	C/V	1960	7/8 Tube	1/2 Tube	3/8 Tube
TAG 5573E	6 1/2	134.8	3Ø	11	C/V	1960	7/8 Tube	1/2 Tube	3/8 Tube

Hermetique R22  
M/HBP

For Medium /  
High  
Temperature  
Applications

Features:

Anti-Vibration  
mounts supplied

Charged with  
mineral oil and  
dry nitrogen

Rotalock  
suction valve  
on CAJ/TAJ  
models

Crankcase  
heater on  
FH/TFH and TAG  
models

Oil sight glass  
on FH/TFH and  
TAG models

Fan cooling  
required on all  
models

All models suit  
capillary tube  
or expansion  
valve operation

Rotalock  
suction and  
discharge  
valves on  
FH/TFH and TAG  
models

Specifications:  
Capacity Rating  
Basis: 35°C  
Ambient, 11K  
Return Gas  
Superheat,  
54.5°C  
Condensing,  
46°C Liquid  
entering  
Expansion  
Valve.

Current FLA are  
given at  
nominal  
voltage, rated  
conditions and  
7.2°C  
evaporating  
temperature.

Motor Types:  
CSIR: Capacitor  
start,  
Induction run }  
1 Phase, 50 Hz,  
220-240 Volt

CSR: Capacitor  
start and run  
3Ø: 3 Phase, 50  
Hz, 400 Volt

Conversion:  
Watts x 3.412 =  
BTU/Hr BTU/Hr x  
0.293 = Watts

R22 Hermetic

Model No.	Nominal HP	Displ. cm <sup>3</sup> /rev	Motor Type	Nominal Oil		Connections:	
				Current FLA	Charge cm <sup>3</sup>	inches	
	Suction	Discharge					
AEZ 4425E	1/5	4.5	CSIR	1.75	450	1/4 Tube	3/16 Tube
AEZ 4430E	1/4	5.7	CSIR	2.2	450	1/4 Tube	3/16 Tube
AEZ 4440E	1/3	7.55	CSIR	2.6	450	1/4 Tube	3/16 Tube
AEZ 9440T	1/3	7.55	CSR	2.03	450	3/8 Tube	1/4 Tube
CAE 4450E	3/8	9.4	CSIR	3.3	450	3/8 Tube	1/4 Tube
CAE 9450T	3/8	9.5	CSR	2.6	450	3/8 Tube	1/4 Tube
CAE 9460T	1/2	11.3	CSR	3.2	450	3/8 Tube	1/4 Tube
CAJ 9408T	5/8	15.2	CSR	3.68	887	1/2 Valve	5/16 Tube
CAJ 9510T	1	18.3	CSR	4.8	887	5/8 Valve	5/16 Tube
CAJ 9513T	1 1/8	24.2	CSR	5.9	887	5/8 Valve	5/16 Tube
CAJ 4517E	1 1/4	25.95	CSR	6.1	887	5/8 Valve	3/8 Tube
TAJ 4517T	1 1/2	25.95	3Ø	2.5	887	5/8 Valve	3/8 Tube
TAJ 4519T	1 1/2	34.45	3Ø	3.5	887	5/8 Valve	1/2 Valve
FH 4524F	2	43.5	CSR	9.55	1480	5/8 Valve	1/2 Valve
TFH 4524F	2	4.35	3Ø	3.9	1480	7/8 Valve	1/2 Valve
FH 4531F	2 1/2	56.65	CSR	12.6	1480	7/8 Valve	1/2 Valve
TFH4531F	2 1/2	56.65	3Ø	4.75	1480	7/8 Valve	1/2 Valve

TFH 4540F	3	74.25	3Ø	6.08	1480	7/8 Valve	1/2 Valve
TAG 4546T	4	90.2	3Ø	6.6	1960	7/8 Valve	5/8 Valve
TAG 4553T	4 1/2	100.7	3Ø	7.4	1960	7/8 Valve	5/8 Valve
TAG 4561T	5	112.5	3Ø	9	1960	1 7/8 Valve	5/8 Valve
TAG 4568T	6	124.4	3Ø	9.6	1960	1 7/8 Valve	5/8 Valve
TAG 4573T	6 1/2	134.8	3Ø	11	1960	1 7/8 Valve	5/8 Valve

Tecumseh  
Hermetique  
R134a

The world  
renowned  
L'Unite  
Hermetique  
compressors are  
manufactured by  
Tecumseh.

Features:

Charged with  
polyolester oil  
and dry  
nitrogen

Crankcase  
heater on  
FH/TFH and TAG  
models

Oil sight glass  
on FH/TFH and  
TAG models

Rotalock valves  
are included  
for all valve  
connection  
compressors

Anti-vibration  
mounts supplied

Single Phase –  
Medium High SST

Model No.	Nominal HP	Displacement: cm <sup>3</sup> /rev	Cooling	Oil Charge: ml
CAJ4476Y	5/8	21.75	Fan	887
CAJ4492Y	3/9	25.95	Fan	887
CAJ4511Y	1	32.7	Fan	887
FH4518Y	1 1/2	53.2	Fan	1480
FH4525Y	2	74.25	Fan	1480

Three Phase –  
Medium High SST

Model No.	Nominal HP	Displacement: cm <sup>3</sup> /rev	Cooling	Oil Charge: ml
TAJ4511Y	1	32.7	Fan	887
TFH4518Y	1 1/2	53.2	Fan	1480
TFH4525Y	2	74.25	Fan	1480
TAG4528Y	2 1/2	90.2	Fan	1960
TAG4534Y	2 3/4	100.7	Fan	1960
TAG4537Y	3	112.5	Fan	1960
TAG4543Y	3 1/2	124.4	Fan	1960

Superceded  
Models

Model No.	Nominal HP	Displacement: cm3/rev	Cooling	Oil Charge: ml
AEZ4425Y	1/5	7.55	Fan	450
AEZ4430Y	1/4	8.85	Fan	450
CAE4440Y	3/8	12.05	Fan	450
CAE4448Y	1/3	14.15	Fan	450
CAJ4452Y	1/3	15.2	Fan	887
CAE4456Y	1/2	16	Fan	450
CAJ4461Y	1/2	18.3	Fan	887

Tecumseh  
Hermetique  
R404A

The world  
renowned  
L'Unite  
Hermetique  
compressors are  
manufactured by  
Tecumseh.

Features:

Charged with  
polyolester oil  
and dry  
nitrogen

Crankcase  
heater on  
FH/TFH and TAG  
models

Oil sight glass  
on FH/TFH and  
TAG models

Rotalock valves  
are included  
for all valve  
connection  
compressors

Anti-vibration  
mounts supplied

Specifications:

Capacity Rating

Basis: 35°C  
Ambient, 11K

Return Gas  
Superheat,  
54.5°C

Condensing,  
46°C Liquid  
entering

Expansion  
Valve.

Current FLA are  
given at  
nominal  
voltage, rated  
conditions and  
7.2°C

Evaporating  
Temperature.

Motor Types:

CSIR: Capacitor  
Start,  
Induction Run 1  
Phase, 50 Hz,  
220-240 Volt

CSR: Capacitor  
 Start and Run  
 3Ø: 3 Phase, 50  
 Hz, 400 Volt  
 All models are  
 also suitable  
 for operation  
 with R507  
 Single Phase –  
 Medium High SST

Model No.	Nominal HP	Displacement: cm <sup>3</sup> /rev	Cooling	Oil Charge: ml
CAJ9480Z	5/8	15.2	Fan	887
CAJ9510Z	1	18.3	Fan	887
CAJ9513Z	1 1/8	24.2	Fan	887
CAJ4517Z	1 1/4	25.95	Fan	887
CAJ4519Z	1 1/2	34.45	Fan	887
FH4522Z	1 3/4	39.95	Fan	1480
FH4524Z	2	43.5	Fan	1480
FH4531Z	2 1/2	56.65	Fan	1480
FH4540Z	3	74.25	Fan	1480

Three Phase –  
 Medium High SST

Model No.	Nominal HP	Displacement: cm <sup>3</sup> /rev	Cooling	Oil Charge: ml
TAJ9480Z	5/8	15.2	Fan	887
TAJ9510Z	1	18.3	Fan	887
TAJ9513Z	1 1/8	24.2	Fan	887
TAJ4517Z	1 1/4	25.95	Fan	887
TAJ4519Z	1 1/2	34.45	Fan	887
TFH4522Z	1 3/4	39.95	Fan	1480
TFH4524Z	2	43.5	Fan	1480
TFH4531Z	2 1/2	56.65	Fan	1480
TFH4540Z	3	74.25	Fan	1480
TAG4546Z	4	90.2	Fan	1960
TAG4553Z	4 1/2	100.7	Fan	1960
TAG4561Z	5	112.5	Fan	1960
TAG4568Z	6	124.4	Fan	1960
TAG4573Z	6 1/2	134.8	Fan	1960

Single Phase –  
 Low SST

Model No.	Nominal HP	Displacement: cm <sup>3</sup> /rev	Cooling	Oil Charge: ml
CAE2417Z	1/3	11.3	Fan	450
CAE2420Z	1/2	12.54	Fan	450
CAE2424Z	5/8	15	Fan	450
CAJ2428Z	1/2	15.2	Fan	887
CAJ2432Z	5/8	18.3	Fan	887
CAJ2446Z	3/4	26.15	Fan	887
CAJ2464Z	1 1/2	34.45	Fan	887
FH2480Z	2	53.2	Fan	1625
FH2511Z	2 1/2	74.25	Fan	1625

Three Phase –  
 Low SST

Model No.	Nominal HP	Displacement: cm3/rev	Cooling	Oil Charge: ml
TAJ2464Z	1 1/2	34.45	Fan	887
TFH2480Z	2	53.2	Fan	1625
TFH2511Z	2 1/2	74.25	Fan	1625
TAG2516Z	4	112.5	Fan	1960
TAG2522Z	5 1/2	134.8	Fan	1960

Three Phase – Parallel Applications

Model No.	Nominal HP	Displacement: cm3/rev	Application: SST	Cooling	Oil Charge: ml
TAGP4546Z	4	90.2	Medium	Fan	1960
TAGP4553Z	4 1/2	100.7	Medium	Fan	1960
TAGP4561Z	5	112.5	Medium	Fan	1960
TAGP4568Z	6	124.4	Medium	Fan	1960
TAGP4573Z	6 1/2	134.8	Medium	Fan	1960
TAGP2516Z	4	112.5	Low	Fan	1960
TAGP2522Z	5 1/2	134.8	Low	Fan	1960



**MEDIUM/HIGH BAK PRESSURE COMPRESSORS**

Type	COMPRESSOR MODELS	Nominal Power (H.P.)				REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)						VOLTAGE
			Refrigerant	Displacement (cm <sup>3</sup> )	Oil charge (cm <sup>3</sup> )	Evaporating Temperature						
						-25°C	-15°C	-10°C	0°C	+7.2°C	+15°C	
PISTON	AEZ4425E	1/5	R22	4.50	250	138	192	256	413	553	728	220-240V/1/50Hz
	AEZ4430E	1/4	R22	5.70	250	192	255	336	538	718	945	220-240V/1/50Hz
	AEZ3440E	1/3	R22	7.55	350	308	362	464	733	980	1298	220-240V/1/50Hz
	AEZ4440E	1/3	R22	7.55	350	308	362	464	733	980	1298	220-240V/1/50Hz
	AEZ9440T	1/3	R22	7.55	350	222	362	464	733	975	1302	220-240V/1/50Hz
	CAE4450E	3/7	R22	9.40	350	355	426	554	896	1212	1623	220-240V/1/50Hz
	CAE9450T	3/7	R22	9.40	350	256	426	554	896	1212	1623	220-240V/1/50Hz
	CAE9460T	1/2	R22	11.30	350	324	553	715	1134	1514	2000	220-240V/1/50Hz
	CAJ9480T TAJ9480T	5/8	R22	15.20	887	461	786	1011	1586	2103	2761	220-240V/1/50Hz 400V/3/50Hz
	CAJ9510T TAJ9510T	1	R22	18.30	887	545	956	1229	1909	2510	3266	220-240V/1/50Hz 400V/3/50Hz
	CAJ9513T TAJ9513T	1-1/8	R22	24.20	887	526	1074	1451	2411	3272	4366	220-240V/1/50Hz 400V/3/50Hz
	CAJ4517E TAJ4517T	1-1/4	R22	25.95	887	771	1233	1673	2727	3629	4743	220-240V/1/50Hz 400V/3/50Hz





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)


Mbsm\_dot\_pro\_private\_PDF\_AEZ9440TTélécharger

---

Compressor, hermetic, medium  
temperature, 7 HP, r22, POE, MT80HP4,  
MT80 HP4, 400/3/50, 460/3/60 volt,  
1-3/4" RL – 1-1/8" x 1-1/4" RL – 3/4"

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 7 February 2022

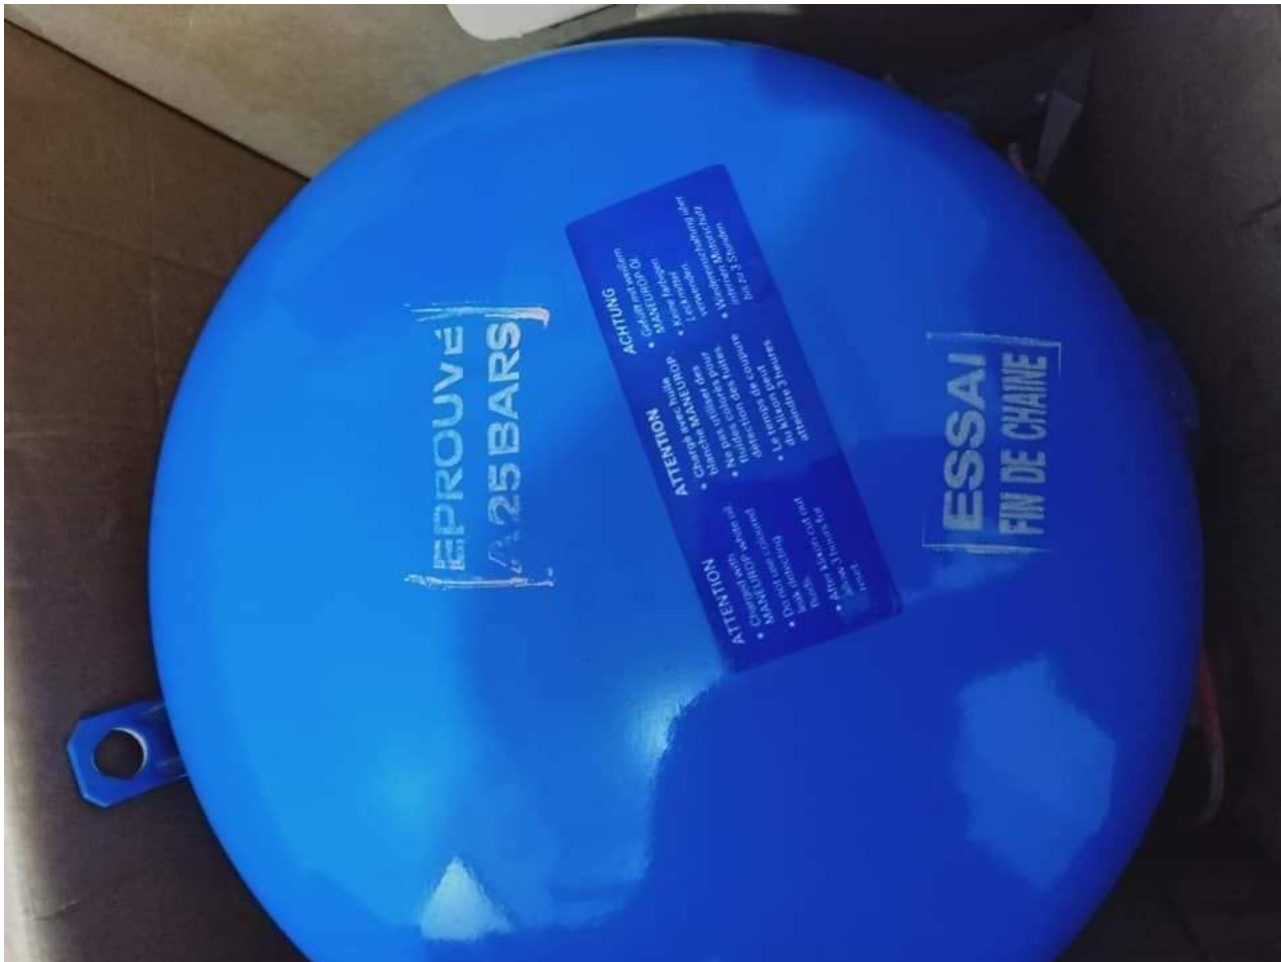

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Product details

Gross weight 41.58 kg

Net weight 39.1 kg

EAN 5702428839525

Approval standard	CE UL
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Cylinder	2
Description	MT080-4
Diameter [mm]	288 mm
Discharge connection height [mm]	74 mm
Discharge connection mounting torque [Nm]	90 Nm
Discharge connection pipe size [in]	3/4 in

Discharge connection rotolock size [in]	1 1/4 in
Discharge connection size [in]	1 1/4 in
Discharge connection sleeve pipe size [in]	3/4 in
Drawing number	8502012g
Economizer	No
Factory HP [bar]	25 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	B
Glass mounting	Threaded
Glass torque [Nm]	50 Nm
GP LP torque [Nm]	15 Nm
High side max pressure (Ps)	27.8 bar
High Side TS Max	150 °C
High Side TS Min	-35 °C
High Side Volume	0.6 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	460 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP55 (with cable gland)
Low side max pressure (Ps)	18.4 bar
Low Side TS Max	50 °C
Low Side TS Min	-35 °C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	340 V
Low value of voltage range at 60Hz [V]	414 V
LRA	80 A
MCC	18 A
Model number	MT80HP4AVE
Motor protection	Internal overload protector
Mounting torque [Nm]	15 Nm
Nominal cooling capacity 60 kBTU/h	80.2 kBTU/h
Nominal cooling capacity at 50Hz	17.8 kW
Nominal cooling capacity at 60Hz	23.5 kW
Number of starts per hour [Max]	12
Oil charge [L]	1.8 L
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	30 Nm

Oil reference	160P
Packaging height [mm]	455 mm
Packaging length [mm]	395 mm
Packaging weight [Kg]	44 kg
Packaging width [mm]	365 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Spade
Refrigerant	R22
Refrigerant charge [kg] [Max]	5 kg
Relief valve	30 bar/8 bar
Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning Refrigeration MT
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets
Shipped instructions	Installation instructions
Shipped mounting	Mounting kit with grommets, bolts, nuts, sleeves and washers
Shipped oil	Initial oil charge
Suction connection height [mm]	265 mm
Suction connection mounting torque [Nm]	110 Nm
Suction connection pipe size [in]	1 1/8 in
Suction connection rotolock size [in]	1 3/4 in
Suction connection size [in]	1 3/4 in
Suction connection sleeve pipe size [in]	1 1/8 in
Swept volume [cm <sup>3</sup> ]	135.78 cm <sup>3</sup>
Technology	Reciprocating
Test dif [bar] [Max]	30 bar
Test HP [bar] [Max]	30 bar
Test LP [bar] [Max]	25 bar
Torque earth [Nm]	3 Nm
Torque power [Nm]	3 Nm
Total height [mm]	413 mm
Type	MT
Type designation	Compressor
Viscosity [cP]	32 cP
Winding resistance for three-phase compressors with identical windings [Ohm]	1.94 Ohm
Description	

# Product details

Gross weight 44.5 kg

Net weight 42 kg

EAN 5702428839525

Gross weight 44.5 kg

Net weight 42 kg

EAN 5702428839525

Approval standard	CE UL
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Cylinder	2
Description	MT080-4
Diameter [mm]	288 mm
Discharge connection height [mm]	74 mm
Discharge connection mounting torque [Nm]	90 N-m
Discharge connection pipe size [in]	3/4 in
Discharge connection rotolock size [in]	1 1/4 in
Discharge connection size [in]	1 1/4 in
Discharge connection sleeve pipe size [in]	3/4 in
Drawing number	8502012g
Economizer	No
Factory HP [bar]	25 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	B
Glass mounting	Threaded
Glass torque [Nm]	50 N-m
GP LP torque [Nm]	15 N-m
High side max pressure (Ps)	27.8 bar
High Side TS Max	150 Â°C
High Side TS Min	-35 Â°C

High Side Volume	0.6 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	460 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP55 (with cable gland)
Low side max pressure (Ps)	18.4 bar
Low Side TS Max	50 Â°C
Low Side TS Min	-35 Â°C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	340 V
Low value of voltage range at 60Hz [V]	414 V
LRA	80 A
MCC	18.5 A
Model number	MT80HP4AVE
Motor protection	Internal overload protector
Mounting torque [Nm]	15 N-m
Nominal cooling capacity 60 kBTU/h	80.2 kBtu/h
Nominal cooling capacity at 50Hz	17.8 kW
Nominal cooling capacity at 60Hz	23.5 kW
Number of starts per hour [Max]	12
Oil charge [L]	1.8 L
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	30 N-m
Oil reference	160P
Packaging height [mm]	455 mm
Packaging length [mm]	395 mm
Packaging weight [Kg]	44 kg
Packaging width [mm]	365 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Spade
Refrigerant	R22
Refrigerant charge [kg] [Max]	5 kg
Relief valve	30 bar/8 bar
Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning Refrigeration MT
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets
Shipped instructions	Installation instructions

Shipped mounting	Mounting kit with grommets, bolts, nuts, sleeves and washers
Shipped oil	Initial oil charge
Suction connection height [mm]	265 mm
Suction connection mounting torque [Nm]	110 N-m
Suction connection pipe size [in]	1 1/8 in
Suction connection rotolock size [in]	1 3/4 in
Suction connection size [in]	1 3/4 in
Suction connection sleeve pipe size [in]	1 1/8 in
Swept volume [cm <sup>3</sup> ]	135.78 cm <sup>3</sup>
Technology	Reciprocating
Test dif [bar] [Max]	30 bar
Test HP [bar] [Max]	30 bar
Test LP [bar] [Max]	25 bar
Torque earth [Nm]	3 N-m
Torque power [Nm]	3 N-m
Total height [mm]	413 mm
Type	MT
Type designation	Compressor
Viscosity [cP]	32 cP
Winding resistance for three-phase compressors with identical windings [Ohm]	1.94 Ohm
Approval standard	CE UL
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Cylinder	2
Description	MT080-4
Diameter [mm]	288 mm
Discharge connection height [mm]	74 mm
Discharge connection mounting torque [Nm]	90 N-m
Discharge connection pipe size [in]	3/4 in
Discharge connection rotolock size [in]	1 1/4 in
Discharge connection size [in]	1 1/4 in
Discharge connection sleeve pipe size [in]	3/4 in
Drawing number	8502012g
Economizer	No
Factory HP [bar]	25 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF

Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	B
Glass mounting	Threaded
Glass torque [Nm]	50 N-m
GP LP torque [Nm]	15 N-m
High side max pressure (Ps)	27.8 bar
High Side TS Max	150 Â°C
High Side TS Min	-35 Â°C
High Side Volume	0.6 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	460 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP55 (with cable gland)
Low side max pressure (Ps)	18.4 bar
Low Side TS Max	50 Â°C
Low Side TS Min	-35 Â°C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	340 V
Low value of voltage range at 60Hz [V]	414 V
LRA	80 A
MCC	18.5 A
Model number	MT80HP4AVE
Motor protection	Internal overload protector
Mounting torque [Nm]	15 N-m
Nominal cooling capacity 60 kBTU/h	80.2 kBtu/h
Nominal cooling capacity at 50Hz	17.8 kW
Nominal cooling capacity at 60Hz	23.5 kW
Number of starts per hour [Max]	12
Oil charge [L]	1.8 L
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	30 N-m
Oil reference	160P
Packaging height [mm]	455 mm
Packaging length [mm]	395 mm
Packaging weight [Kg]	44 kg
Packaging width [mm]	365 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Spade

<b>Refrigerant</b>	R22
<b>Refrigerant charge [kg] [Max]</b>	5 kg
<b>Relief valve</b>	30 bar/8 bar
<b>Rotational speed at 50Hz [rpm]</b>	2900 rpm
<b>Rotational speed at 60Hz [rpm]</b>	3500 rpm
<b>Segment usage</b>	Air conditioning Refrigeration MT
<b>Shipped fittings</b>	Suction and discharge solder sleeves, rotolock nuts and gaskets
<b>Shipped instructions</b>	Installation instructions
<b>Shipped mounting</b>	Mounting kit with grommets, bolts, nuts, sleeves and washers
<b>Shipped oil</b>	Initial oil charge
<b>Suction connection height [mm]</b>	265 mm
<b>Suction connection mounting torque [Nm]</b>	110 N-m
<b>Suction connection pipe size [in]</b>	1 1/8 in
<b>Suction connection rotolock size [in]</b>	1 3/4 in
<b>Suction connection size [in]</b>	1 3/4 in
<b>Suction connection sleeve pipe size [in]</b>	1 1/8 in
<b>Swept volume [cm3]</b>	135.78 cm3
<b>Technology</b>	Reciprocating
<b>Test dif [bar] [Max]</b>	30 bar
<b>Test HP [bar] [Max]</b>	30 bar
<b>Test LP [bar] [Max]</b>	25 bar
<b>Torque earth [Nm]</b>	3 N-m
<b>Torque power [Nm]</b>	3 N-m
<b>Total height [mm]</b>	413 mm
<b>Type</b>	MT
<b>Type designation</b>	Compressor
<b>Viscosity [cP]</b>	32 cP
<b>Winding resistance for three-phase compressors with identical windings [Ohm]</b>	1.94 Ohm
Refrigerant: R22, Segment usage: Air conditioning;Refrigeration MT, Compressor power supply [V/Ph/Hz]: 400/3/50 460/3/60	

## Product details

**Gross weight** 44.5 kg  
**Net weight** 42 kg  
**EAN** 5702428839525  
**Gross weight** 44.5 kg  
**Net weight** 42 kg  
**EAN** 5702428839525

Approval standard	CE UL
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Cylinder	2
Description	MT080-4
Diameter [mm]	288 mm
Discharge connection height [mm]	74 mm
Discharge connection mounting torque [Nm]	90 N-m
Discharge connection pipe size [in]	3/4 in
Discharge connection rotolock size [in]	1 1/4 in
Discharge connection size [in]	1 1/4 in
Discharge connection sleeve pipe size [in]	3/4 in
Drawing number	8502012g
Economizer	No
Factory HP [bar]	25 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	B
Glass mounting	Threaded
Glass torque [Nm]	50 N-m
GP LP torque [Nm]	15 N-m
High side max pressure (Ps)	27.8 bar
High Side TS Max	150 Â°C
High Side TS Min	-35 Â°C
High Side Volume	0.6 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	460 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP55 (with cable gland)
Low side max pressure (Ps)	18.4 bar
Low Side TS Max	50 Â°C
Low Side TS Min	-35 Â°C
Low Side Volume	16.5 L

Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	340 V
Low value of voltage range at 60Hz [V]	414 V
LRA	80 A
MCC	18.5 A
Model number	MT80HP4AVE
Motor protection	Internal overload protector
Mounting torque [Nm]	15 N-m
Nominal cooling capacity 60 kBTU/h	80.2 kBtu/h
Nominal cooling capacity at 50Hz	17.8 kW
Nominal cooling capacity at 60Hz	23.5 kW
Number of starts per hour [Max]	12
Oil charge [L]	1.8 L
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	30 N-m
Oil reference	160P
Packaging height [mm]	455 mm
Packaging length [mm]	395 mm
Packaging weight [Kg]	44 kg
Packaging width [mm]	365 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Spade
Refrigerant	R22
Refrigerant charge [kg] [Max]	5 kg
Relief valve	30 bar/8 bar
Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning Refrigeration MT
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets
Shipped instructions	Installation instructions
Shipped mounting	Mounting kit with grommets, bolts, nuts, sleeves and washers
Shipped oil	Initial oil charge
Suction connection height [mm]	265 mm
Suction connection mounting torque [Nm]	110 N-m
Suction connection pipe size [in]	1 1/8 in
Suction connection rotolock size [in]	1 3/4 in
Suction connection size [in]	1 3/4 in
Suction connection sleeve pipe size [in]	1 1/8 in
Swept volume [cm3]	135.78 cm3

Technology	Reciprocating
Test dif [bar] [Max]	30 bar
Test HP [bar] [Max]	30 bar
Test LP [bar] [Max]	25 bar
Torque earth [Nm]	3 N-m
Torque power [Nm]	3 N-m
Total height [mm]	413 mm
Type	MT
Type designation	Compressor
Viscosity [cP]	32 cP
Winding resistance for three-phase compressors with identical windings [Ohm]	1.94 Ohm
Approval standard	CE UL
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Cylinder	2
Description	MT080-4
Diameter [mm]	288 mm
Discharge connection height [mm]	74 mm
Discharge connection mounting torque [Nm]	90 N-m
Discharge connection pipe size [in]	3/4 in
Discharge connection rotolock size [in]	1 1/4 in
Discharge connection size [in]	1 1/4 in
Discharge connection sleeve pipe size [in]	3/4 in
Drawing number	8502012g
Economizer	No
Factory HP [bar]	25 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	B
Glass mounting	Threaded
Glass torque [Nm]	50 N-m
GP LP torque [Nm]	15 N-m
High side max pressure (Ps)	27.8 bar
High Side TS Max	150 Â°C

High Side TS Min	-35 Â°C
High Side Volume	0.6 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	460 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP55 (with cable gland)
Low side max pressure (Ps)	18.4 bar
Low Side TS Max	50 Â°C
Low Side TS Min	-35 Â°C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	340 V
Low value of voltage range at 60Hz [V]	414 V
LRA	80 A
MCC	18.5 A
Model number	MT80HP4AVE
Motor protection	Internal overload protector
Mounting torque [Nm]	15 N-m
Nominal cooling capacity 60 kBTU/h	80.2 kBtu/h
Nominal cooling capacity at 50Hz	17.8 kW
Nominal cooling capacity at 60Hz	23.5 kW
Number of starts per hour [Max]	12
Oil charge [L]	1.8 L
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	30 N-m
Oil reference	160P
Packaging height [mm]	455 mm
Packaging length [mm]	395 mm
Packaging weight [Kg]	44 kg
Packaging width [mm]	365 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Spade
Refrigerant	R22
Refrigerant charge [kg] [Max]	5 kg
Relief valve	30 bar/8 bar
Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning Refrigeration MT
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets

<b>Shipped instructions</b>	Installation instructions
<b>Shipped mounting</b>	Mounting kit with grommets, bolts, nuts, sleeves and washers
<b>Shipped oil</b>	Initial oil charge
<b>Suction connection height [mm]</b>	265 mm
<b>Suction connection mounting torque [Nm]</b>	110 N-m
<b>Suction connection pipe size [in]</b>	1 1/8 in
<b>Suction connection rotolock size [in]</b>	1 3/4 in
<b>Suction connection size [in]</b>	1 3/4 in
<b>Suction connection sleeve pipe size [in]</b>	1 1/8 in
<b>Swept volume [cm<sup>3</sup>]</b>	135.78 cm <sup>3</sup>
<b>Technology</b>	Reciprocating
<b>Test dif [bar] [Max]</b>	30 bar
<b>Test HP [bar] [Max]</b>	30 bar
<b>Test LP [bar] [Max]</b>	25 bar
<b>Torque earth [Nm]</b>	3 N-m
<b>Torque power [Nm]</b>	3 N-m
<b>Total height [mm]</b>	413 mm
<b>Type</b>	MT
<b>Type designation</b>	Compressor
<b>Viscosity [cP]</b>	32 cP
<b>Winding resistance for three-phase compressors with identical windings [Ohm]</b>	1.94 Ohm







Private Picture Copyright : WWW.MBSM.PRO

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_MTZ80HP4-1Télécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_MTZ80HP4Télécharger](#)

Compresseur à piston Danfoss Maneurop MT22JC5PVE (2.0HP / 1PH) Compresseur à piston Danfoss Maneurop MT22JC4AVE (2.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT28JC5PVE (2.3HP / 1PH) Compresseur à piston Danfoss Maneurop MT22JC4AVE (2.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT28JC5PVE (2.3HP / 1PH) Compresseur à piston Danfoss Maneurop 3PH (2.3HP / 1PH) 2.6HP / 1PH) Compresseur à piston Danfoss Maneurop MT32JF4DVE (2.6HP / 3PH); Compresseur à piston Danfoss Maneurop MT36JG5CVE (3.0HP / 1PH) Compresseur à piston Danfoss Maneurop MT36JG4FVE (3.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT40JH4EVE (3.3HP / 3PH) Danfoss Maneurop Compresseur à piston MT36JG4FVE (3.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT40JH4EVE (3.3HP / 3PH) Danfoss Maneurop Compresseur à piston MT36JG4FVE (3.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT40JH4EVE (3.3HP / 3PH) Compresseur à piston Danfoss Maneurop 3KFHB4 (3.6HP / 3PH) 4.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT56HL4BVE (4.6HP / 3PH) Compresseur à piston Danfoss Maneurop MT64HM4DVE (5.3HP / 3PH) Compresseur à piston Danfoss Maneurop MT72HN4AVE (6.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT80HP4AVE (6.6HP / 3PH) Compresseur à piston Danfoss Maneurop MT72HN4AVE (6.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT80HP4AVE (6.6HP / 3PH) Compresseur à piston Danfoss Maneurop 4.0 Compresseur à piston MT144HV4AVE (12,0HP / 3PH) Compresseur à piston Danfoss Maneurop MT160HW4EVE (13.3HP / 3PH) Compresseur à piston Danfoss Maneurop MTZ22JC5VE (2.0HP / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ22JC4AVE

(2.0HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ28JE5AVE  
(2,3 HP / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ28JE4AVE  
(2,3 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ32JF5AVE  
(2,6 CV / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ32JF4BVE  
(2.6HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ36JG5AVE  
(3.0HP / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ36JG4BVE  
(3.0HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ40JH4AVE  
(3,3 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ50HK4CVE  
(4,0 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ56HL4BVE  
(4,6 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ64HM4CVE  
(5,3 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ72HN4AVE  
(6,0 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ80HP4AVE  
(6,6 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ100HS4VE  
(8,3 CV / 3 PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ125HU4VE  
(10.0HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ144HV4AVE  
(12,0 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop  
MTZ160HE4AVE (13,3 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss  
Maneurop NTZ048A4LR1A (2.0HP / 3PH); [R134A, R404, R507] Compresseur à piston  
Danfoss Maneurop NTZ068A4LR1A (3,5 CV / 3PH); [R134A, R404, R507] Compresseur à  
piston Danfoss Maneurop NTZ096A4LR1A (4,5 CV / 3PH); [R134A, R404, R507]  
Compresseur à piston Danfoss Maneurop NTZ108A4LR1A (5,0 CV / 3PH); [R134A, R404,  
R507] Compresseur à piston Danfoss Maneurop NTZ136A4LR1A (6,5 CV / 3PH); [R134A,  
R404, R507] Compresseur à piston Danfoss Maneurop NTZ215A4LR1A (10,0 HP /  
3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ271A4LR1A  
(13.0HP / 3PH); [R134A, R404, R507] COMPRESSEUR MANEUROP 2.0HP MT22 MANEUROPE  
2.0HP MT22 COMPRESSEUR MANEUROP COMPRESSEUR MTZ-22JE-4VE R404A MANEUROPE 2.30HP  
MT28JE-5PVE MT28-5VI / MT28-5VM COMPRESSEUR MANEUROP 2.30HP MT28JE-5PVE MT28-5VI  
/ MT28-5VM COMPRESSEUR MANEUROPEUR 2.30H5 / R404A) COMPRESSEUR MANEUROP 2.8HP  
MTZ32-5VM (R134a / R404A / R507) COMPRESSEUR MANEUROP MT32JF5MVE 2-3 / 4HP  
((R22) COMPRESSEUR MANEUROP 3.0HP MT36JG4FVE (MT36-4VI / MT36-4VM) (R22)  
COMPRESSEUR 3.0HP COMPRESSEUR MT36 MANEUROP 3.3HP MT40JH4EVE COMPRESSEUR  
MANEUROP 3.3HP MTZ40-JH4AVE COMPRESSEUR (R407A / C / F / R134A / R404A / R507)  
Compresseur MANEUROP MTZ-36-JG4AVE (R407C / R134a / R404A-R407C / R134a / R404A)  
-Compresseur JH4AVE (R134a / R404A) – Compresseur 3.3HP 3PH MANEUROP MTZ-44-  
HJ4AVE (R134a / R404A) – 3. 5HP 3PH MANEUROP 4HP MTZ-50HK-4CVE (MTZ50-4VI /  
MTZ50-4VM) COMPRESSEUR (R134A / R404A) MANEUROP MTZ56HL3BVE R407c, R134a, R507a,  
R404a compresseur MANEUROP MT-64-4VM COMPRESSEUR MANEUR 64-4VM COMPRESSEUR  
MANEUR COMPRESSEUR MT72-4VM COMPRESSEUR MANEUROP MT-80-4VM (6.5HP) Compresseur  
MANEUROP 6.6HP MT81HP4AVE COMPRESSEUR MANEUROP MTZ80HM4DVE COMPRESSEUR MANEUROP  
8.5HP MT100-4VM COMPRESSEUR MANEUROPE 10HP MT100-4VM (MT100HS4DVE) COMPRESSEUR  
10HP MT100-4VM (MT100HS4DVE) COMPRESSEUR MT12M10 MANHOP 4-COMPRESSEUR 10HP R22)  
COMPRESSEUR MANEUROP 10HP MTZ125HW4AVE (R404A / R134A / R507 / R407C)  
COMPRESSEUR MANEUROPE 12HP MT144-4VM COMPRESSEUR MANEUROPE 13.3HP MT160-4VM  
(MT160HW4DVE) COMPRESSEUR MANZVMER 10 COMPRESSEUR MANZVM4 (MT160HW4DVE) / 2 ' )  
SER. KIT POUR MT-28 MANEUROP 7703009 (1-1 / 8 '& 3/4') SER.