

Compressor, CR32KQ-PFV, CR32K6-PFV-875, Copeland, américain, 3 CV, 2.5 3 Ton, 208 230 Volt A/C, 1 PH, 32,000 BTU, R22, R407C, Hermetic (Reciprocating) Compressor Replacement

Category: compressor

written by www.mbsm.pro | 2 May 2021



Private Picture Copyright: WWW.MBSM.PRO

Compressor, CR32KQ-PFV, CR32K6-PFV-875, Copeland, américain, 3 CV, 2.5 3 Ton, 208 230 Volt A/C, 1 PH, 32,000 BTU, R22, R407C, Hermetic (Reciprocating)
Compressor Replacement

PH360G2C-4FTS1, 22000BTU, GMCC,
Compressor rotary, 2 Ton, air
conditioner, R22, refrigeration
compressor , 50HZ 220V / 240V

Category: compressor

written by www.mbsm.pro | 2 May 2021



Private Picture Copyright : WWW.MBSM.PRO

PH360G2C-4FTS1, 22000BTU, GMCC, Compressor rotary, air conditioner, R22,
refrigeration compressor , 50HZ 220V / 240V

Whirlpool, Aspera, NE2125E, LBP,
capacitive, start inductive run,
hermetic compressor, R22, 1/4Hp++ or
1/3Hp-

Category: compressor

written by www.mbsm.pro | 2 May 2021



Private Picture Copyright: WWW.MBSM.PRO

ompressor Aspera NE2125E, LBP – R22, 220-240V / 1 / 50Hz, stroke volume 8.78 cm³, LRA 11.0A, motor type CSIR, capillary tube / expansion valve operation, oil AB 46.Cooling

capacity measured for condensation temperature of: 45 ° C, Measurement conditions: ASHRAE

Unfortunately the compressor is no longer available.

If you would like an offer for an identical alternative, please email us or give us a short call, we will prepare an offer for you.Cooling capacity (W) at To

– 10 ° C – 15 ° C – 20 ° C – 25 ° C – 30 ° C

651 517 401 304 226




Private Picture Copyright: WWW.MBSM.PRO

R22 - LBP Applications

COMPRESSOR	FREQUENCY	DIMENSION	
		(from -30°C to -5°C evap. temp.)	-
NE2125E	50 Hz	0.91 mm I.D. × 3.2 m	-
	60 Hz	0.91 mm I.D. × 2.85 m	-
NE2134E	50 Hz	0.91 mm I.D. × 2.8 m	-
	60 Hz	0.91 mm I.D. × 2.5 m	-
T2140E	50 Hz	0.91 mm I.D. × 2.6 m	-
	60 Hz	0.91 mm I.D. × 2.3 m	-
T2155E	50 Hz	1.20 mm I.D. × 3.9 m	-
	60 Hz	1.20 mm I.D. × 3.5 m	-
T2168E	50 Hz	1.20 mm I.D. × 3.3 m	-
	60 Hz	1.20 mm I.D. × 2.8 m	-
NJ2178E	50 Hz	1.20 mm I.D. × 3.0 m	-

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

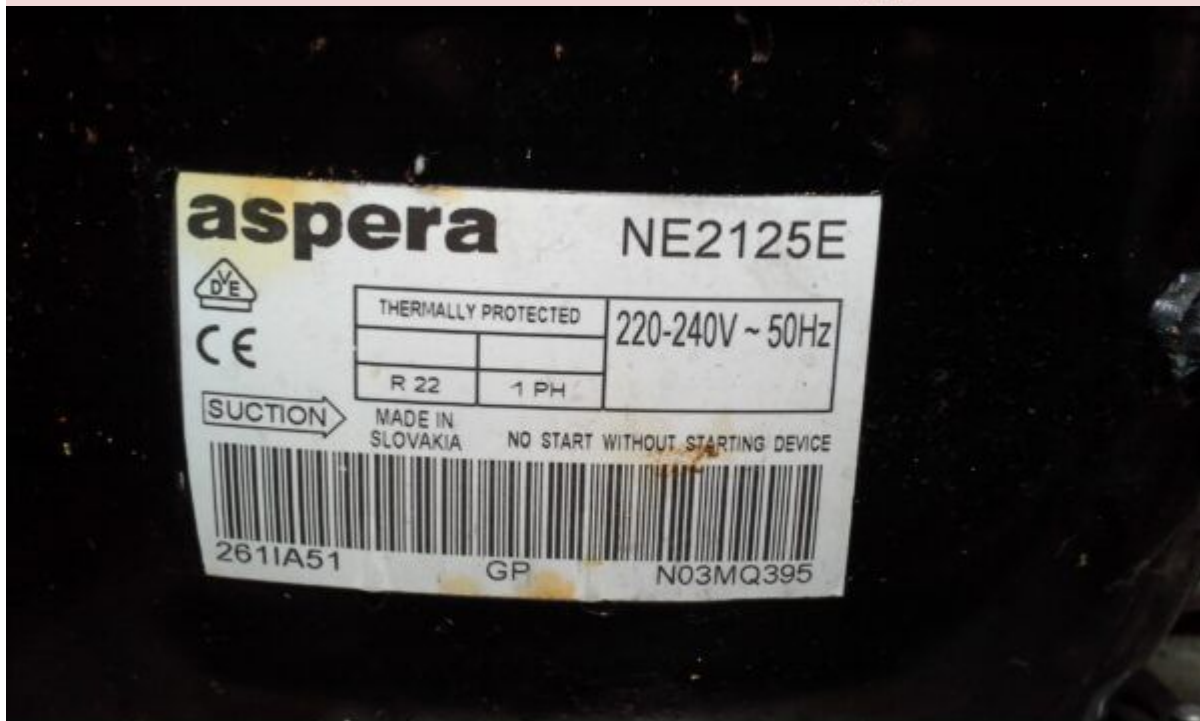

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO









Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ne2125e-Embraco_VerdichterTélécharger

Shipping Class	Default
Scope Of Application	LBP
Delivery Time	2-3 Weeks
Stock Availability	In Stock
Type	Reciprocating Piston
Condensation Temperature	45 ° C
Manufacturer	Aspera
Manufacturer No.	NE2125E
Power In Hp	1/4 +
Starting Torque	HST
Stroke Volume In Cm3	8.78
Measurement Conditions	Ashrae
Refrigerant	R22
Oil Type	IS046
Series	NE
Condensing Units Compressors	Compressor

Tension	220-240V
Weight In Kg	10.4


Danfoss, Compressor, 5 Hp, R22, Démontage, ouverture, DESTRUCTION

Category: compressor


written by www.mbsm.pro | 2 May 2021



Private Picture Copyright : WWW.MBSM.PRO

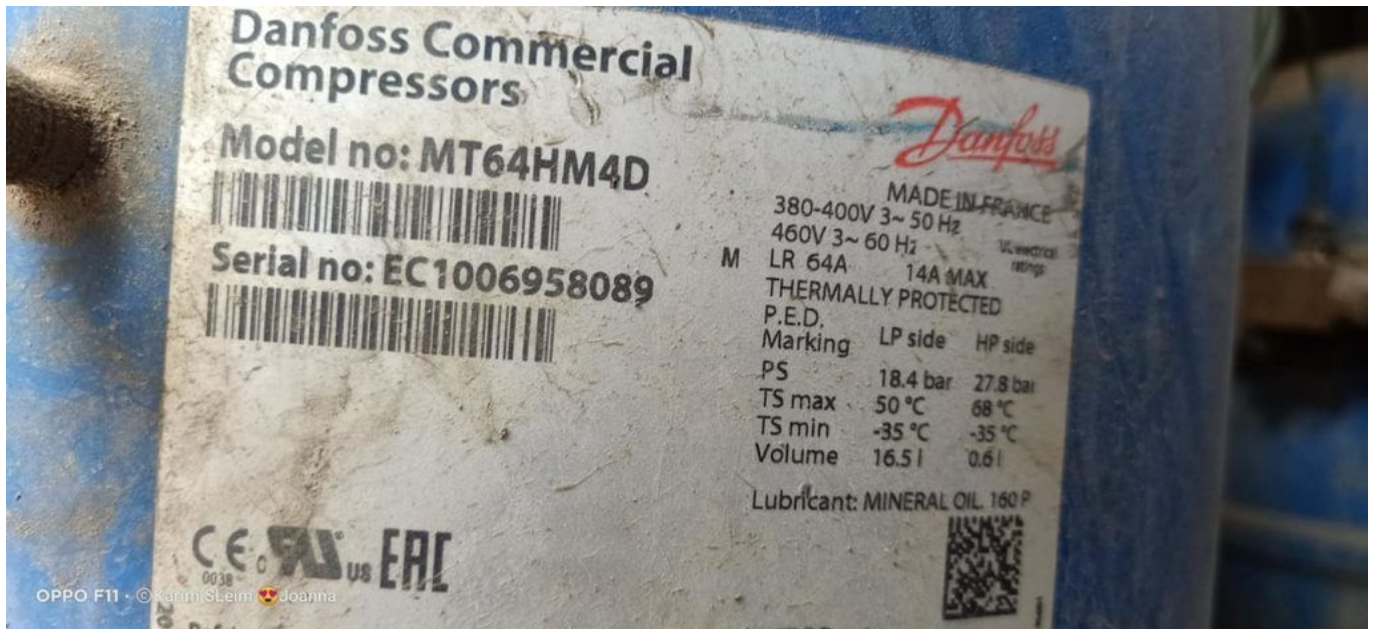

Private Picture Copyright: WWW.MBSM.PRO

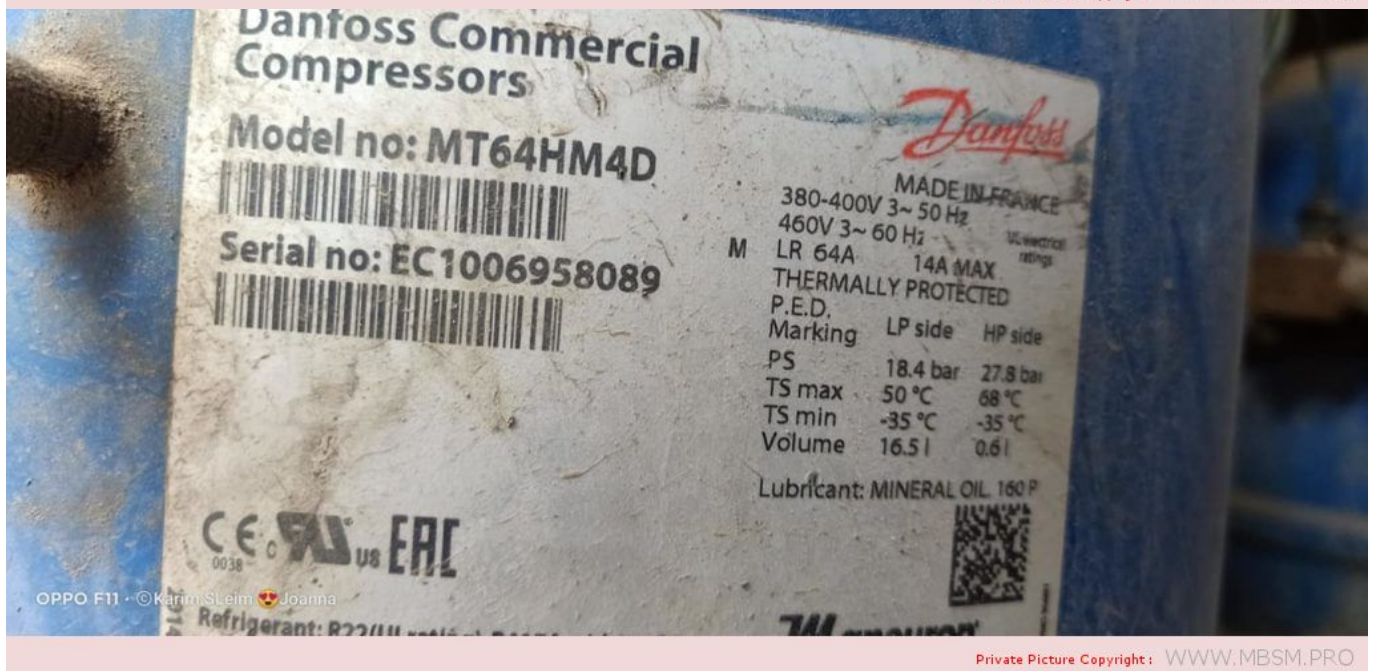

Private Picture Copyright: WWW.MBSM.PRO

Product : Compressor
 产地: 法国制造
 Plant : Made in France
 客户: 丹佛斯自动控制管理(上海)有限公司
 Customer service: Danfoss Automatic Controls Management (Shanghai) Co.Ltd
 地址电话: 上海市宜山路900号科技大楼C楼20层200233 / (021)61513000
 Address/Tel: 20th Floor Block C, Hi-Tech Building
 900 Yi Shan Road Shanghai 200233 / (021)61513000
 警告: 只有具备一定经验和安全程序
 培训的授权人员才可以进行安装和维修。
 Warning: The installation and maintenance
 should be performed by the authorized
 person only



Danfoss Commercial Compressors



型号: MT64HM4DVE


 序列号: EC1006983516


产地法国
 380-400V 3~ 50 Hz
 460V 3~ 60 Hz
 额定电流: 6.4A 最大工作电流: 1.4A
 过热保护
 低压侧
 最高极限压力 18.4 bar
 最高极限温度 50 °C
 最低极限温度 -35 °C

润滑油: MINERAL OIL 160 P



R410A 制冷剂: R22 或 R417A 仅和 160PZ



WARNING

Installation and servicing shall be performed by trained personnel only. Failure to observe these safety warnings could result in personal injury or death.
 1. Before working on the compressor, turn off power before removing the charge of capacitors.
 2. Never connect power in place and securely fastened whenever power is applied to the compressor. Use this equipment on a grounded system only.
 3. The system contains refrigerant and oil under pressure. Release pressure from both the high and low side before servicing under safety conditions.
 4. Do not touch the hot surface of the compressor.



CAUTION

Use only manufacturer's approved refrigerants, lubricants, and electrical components. Unauthorized refrigerants / lubricant / electrical component could cause fire, explosion, electrical shorting.
 For details refer to multi language instruction and technical documents available on Danfoss website at www.danfoss.com



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO







Private Picture Copyright : WWW.MBSM.PRO

GMCC, 9000BTU, 12000BTU, 18000BTU, 24000BTU, R22, Climatiseur Compresseur, rotatif T3, pH440G2CS-4KTS1 / pH440X3CS-4KTS1, 2Hp, 26000BTU, Compresseur Toshiba, A / C R22 220-240V / 50HZ / 1PH

Category: compressor

written by www.mbsm.pro | 2 May 2021



Private Picture Copyright : WWW.MBSM.PRO

Description du compresseur GMCC Les compresseurs de climatisation GMCC réduisent les coûts pendant toute la durée de vie du produit dans l'application.

Ils prennent en charge la conception de systèmes pour des performances à haut rendement et pour l'utilisation de réfrigérants alternatifs pour les applications HVAC commerciales, commerciales et industrielles légères telles que les unités de toit, les refroidisseurs, le refroidissement de processus, les unités emballées, etc.

GMCC Liste Modèle

	Dépl.	Capacité	Condensateur	Pouvoir en metre	Poids kg	Ensembles De paquets/Palette
HSM165V3UDZA	16.4(cm3/rev)	2845W 9710BTU	30/370µF-V	870W	12.3kg	80 ensembles/Palette
HSM215V3UDZA	21.4(cm3/rev)	3720W 12690BTU	40/370µF-V	1155W	12.7kg	60 ensembles/Palette
PH290M2C-4FT1	29.1(cm3/rev)	5100W 17400BTU	35/370µF-V	1645W	16.1kg	60 ensembles/Palette

PH310M2CS-4KUH 31(cm3/rev)	5510W 18800BTU 40/400µF-V	1710W	17.8kg	60 ensembles/Palette
PH340M2CS-4KU 34(cm3/rev)	5960W 20335BTU 50/400µF-V	1870W	17.8kg	60 ensembles/Palette
PH370G2CS-4KU1 37(cm3/rev)	6650W 22690BTU 50/400µF-V	2065W	18.6kg	48 ensembles/Palette
PH400G2CS-4KU1 39.8(cm3/rev)	7100W 24226BTU 50/400µF-V	2430W	20.2kg	48 ensembles/Palette
PH420G2CS-4KU1 42.3(cm3/rev)	7460W 25450BTU 50/400µF-V	2525W	20.2kg	48 ensembles/Palette
PH440X3CS-4KU1 43.5(cm3/rev)	7650W 26100BTU 50/400µF-V	2510W	22.2kg	48 ensembles/Palette
PH480X3CS-4MU1 47.9(cm3/rev)	8460W 28865BTU 55/400µF-V	2730W	25.2kg	48 ensembles/Palette

Informations de base

Numéro de modèle: PH440X3CS-4MU1

Information additionnelle

Lieu d'origine: Panyu, Guangzhou

Description du produit

Compresseur Toshiba GMCC A / C R22 220-240V / 50HZ / 1PH

Données du

compresseur Compresseur: PH440X3CS-4MU1

Réfrigérant: R22

Type de compresseur : Compresseur à moteur hermétique

Type de pompe:

Huile rotative préchargée: FV50S 900cm³ N.W

.: 22,2KG

Performance nominale

Alimentation: 220- 240V / 50HZ / 1PH

Capacité: 7650W

Entrée: 2510W

Conditions nominales

Température d'évaporation ARI : 7,2 ° C

Température de condensation: 54,4 ° C

Température du gaz de retour: 18,3 ° C

Temp du liquide: 46,1 ° C

Ambiante, air au-dessus: 35 ° C , 1m / s

Liste des accessoires standard

Couvre-

bornes Cache

-bornes Joint Écrou-Cache-borne

Écrou Joint

caoutchouc Grommet
ressort

MODÈLE	CAPACITÉ CONTRIBUTION		FLIC	EMBALLAGE	CONDENSATEUR	NO	GW / PKG
	W	BTU / H					
PH180X1C-4DZDE3	3 015	10 287	1	012		2,9860	35μF / 370VAC 14,9976
PH225X2C-4FT	3 870	13 204	1	250		3.1060	35μF / 370VAC 15,8998
PH290M2C-4FT1	5 100	17 400	1	645		3.1060	35μF / 370VAC 16,11016
Compresseur rotatif GMCC	PH310M2CS-4KUH	5 470	18 663	1	710	3.2060	40μF / 400VAC 17,81118
220-240V / 50HZ / 1Ph	PH370G2CS-4MU1	6 605	22 535	2	070	3.1948	50μF / 400VAC 19,0962
	PH400G2CS-4KU1	7 015	23 934	2	260	3.1048	50μF / 400VAC 20,21020
	PH420G2CS-4KU1	7 420	25 316	2	390	3.1048	50μF / 400VAC 20,21020
	PH440X3CS-4MU1	7 650	26 100	2	510	3,0548	50μF / 400VAC 22.21116
	PH480X3CS-4MU1	8 460	28 864	2	730	3.1048	55μF / 400VAC 25,21260



Private Picture Copyright : WWW.MBSM.PRO

PH440X3CS - 4KTS1

220 - 240V ~, 50HZ

RoHS



002001472W


TOSHIBA (GMCC)



Danfoss, Reciprocating, compressors, MT / MTZ / NTZ, MT64HM4DVE, R22, 5HP / hp, 3,9KW, 15A

Category: compressor

written by www.mbsm.pro | 2 May 2021

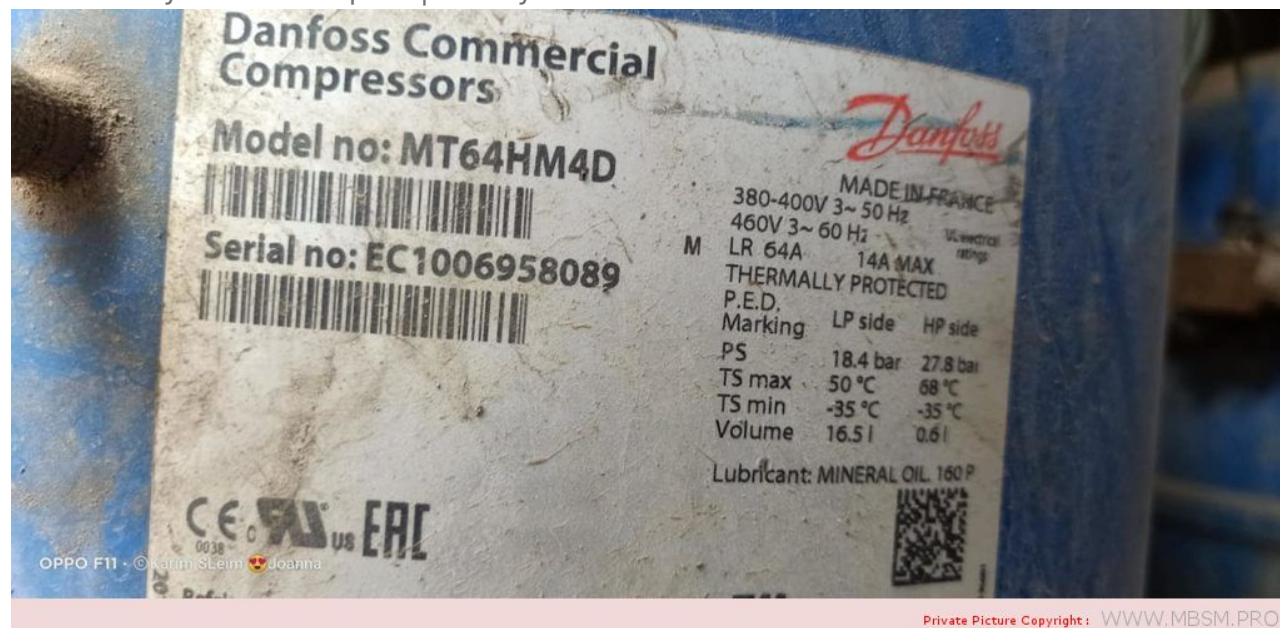

Private Picture Copyright: WWW.MBSM.PRO

MT64HM4DVE Compresseur Danfoss Meyo Paramètres détaillés:

Nombre nominal de chevaux: 5HP / hp

Puissance nominale: 3,9KW

Courant de démarrage à rotor bloqué: 67A

Courant de travail: 15A

Cylindrée: 107,71 cm³ / tr

interface filetée d'aspiration: 1 "3/4

rangée Interface de filetage d'air: 1 "3/4

taille du tuyau d'aspiration: 7/8"

taille du tuyau d'échappement: 3/4 "

vitesse: 2900 tr / min

Poids net: 37 kg

Detailed Product Description

MT Series	R22	Type:	Hermetic
Refrigerant:			Reciprocating
			Compressor
Phase:	1PH,3PH	Application	Middle High
Horse Power:	1.5HP To 13.3HP	Temp.:	Temperature
Voltage:	380-400 -460V	Frenquency:	50HZ 60HZ
	For Commercial	Colour:	Blue
Usage:	Refrigeration And Air		
	Conditioning		

R22 Danfoss Maneurop Hermetic compressor MT64HM3DVE France Maneurop Piston Reciprocating compressor

Danfoss Maneurop NTZ series compressors are hermetic reciprocating type and designed for low evaporating temperature applications. Refrigerant: R404A/R507A
Models: NTZ048/NTZ068/NTZ096/NTZ108/NTZ136/NTZ215/NTZ...

Danfoss Maneurop MT/MTZ series compressors are hermetic reciprocating type and designed for Medium and High evaporating temperature applications.
Refrigerant R22, R407C, R134A, R404A
380-400V/3~/50Hz and 460V/3~/60Hz
Models: MT/MTZ018 MT/MTZ022 MT/MTZ028... MT/MTZ320

Danfoss Maneurop MPZ series compressors are hermetic reciprocating type and designed for Medium and High evaporating temperature applications.
Refrigerant: R404A/R507A
Models: MPZ2038/MPZ2048/MPZ2054/MPZ2061/MPZ2068

Danfoss Maneurop Commercial Hermetic Scroll Compressor MT64HM4DVE Specification:

Maneurop MT/MTZ series compressors are of the hermetic reciprocating type and are designed for Medium and high evaporating temperature applications. There are 26 different models with displacement ranging from 30-543cm³/rev. Our Maneurop compressors are for 50Hz, motor code is 4, can be used for R22/R407C/R134a/R404A/R507

1. Piston /reciprocating type compressors.
2. Voltage is 50Hz
3. The refrigerant are R22/R407C/R134a/R404A/R507
4. There are MT/MTZ series
5. Original from France.
6. Capacity: 1.5HP~13HP, High efficiency, Low noise

1. MT series for R134a
 2. MTZ series for R407c/134a
1. 50 Hz
 2. Imported from France.
 3. R22 Rated condition: 50Hz/400V
superheat: 11.1K
subcooling 8.3K condensing temp: 54.4°C
 4. R407C Rated condition : 50Hz 400V
superheat: 11.1K
subcooling 8.3K condensing temp: 54.4°C
evaporating temp. 7.2°C
refrigeration and power input ±5%

We can supply more Danfoss compressor models as below:

MODEL (R22)	MODEL (R404A)	NTZ series
MT18-4VM	MTZ18-4VM	NTZ048A4LR1A
MT22-4VM	MTZ22-4VM	NTZ068A4LR1A
MT28-4VM	MTZ28-4VM	NTZ096A4LR1A
MT32-4VM	MTZ32-4VM	NTZ108A4LR1A
MT36-4VM	MTZ36-4VM	NTZ136A4LR1A
MT40-4VM	MTZ40-4VM	NTZ215A4LR1A
MT44-4VM	MTZ44-4VM	NTZ271A4LR1A
MT50-4VM	MTZ50-4VM	□
MT56-4VM	MTZ56-4VM	□
MT64-4VM	MTZ64-4VM	□
MT72-4VM	MTZ72-4VM	□
MT80-4VM	MTZ80-4VM	□
MT100-4VM	MTZ100-4VM	□
MT125-4VM	MTZ125-4VM	□
MT144-4VM	MTZ144-4VM	□
MT160-4VM	MTZ160-4VM	

Model NO.	Nom HP	Displ. Cc/rev	Capacity R404a(w)	
			-10	-5
MTZ18-4VI	1.5	30.2	1580	2110
MTZ18-5VI	1.5	30.2	1580	2110
MTZ22-4VI	1.8	38.12	2270	2920
MTZ22-5VI	1.8	38.12	2270	2920
MTZ28-4VI	2.3	48.06	2880	3720
MTZ28-5VI	2.3	48.06	2880	3720
MTZ32-4VI	2.7	53.86	3230	4220
MTZ32-5VI	2.7	53.86	3230	4220
MTZ36-4VI	3	60.47	3800	4870
MTZ36-5VI	3	60.47	3800	4870
MTZ40-4VI	3.3	67.89	4280	5490
MTZ45-4VI	3.8	76.22	4420	5840
MTZ51-4VI	4.2	85.64	5290	6920
MTZ57-4VI	4.8	96.13	6060	7880
MTZ65-4VI	5.4	107.71	7080	9130
MTZ73-4VI	6.1	120.94	7960	10230
MTZ81-4VI	6.8	135.78	9160	11720
MTZ100-4VI	8.3	171.26	10390	13500
MTZ125-4VI	10.4	215.44	13650	17500
MTZ144-4VI	12	241.87	15740	20120
MTZ160-4VI	13.3	271.55	17690	22520

Compresseur à piston Danfoss Maneurop MT22JC5PVE (2.0HP / 1PH) Compresseur à piston Danfoss Maneurop MT22JC4AVE (2.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT28JC5PVE (2.3HP / 1PH) Compresseur à piston Danfoss Maneurop MT22JC4AVE (2.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT28JC5PVE (2.3HP / 1PH) Compresseur à piston Danfoss Maneurop 3PH (2.3HP / 1PH) 2.6HP / 1PH) Compresseur à piston Danfoss Maneurop MT32JF4DVE (2.6HP / 3PH); Compresseur à piston Danfoss Maneurop MT36JG5CVE (3.0HP / 1PH) Compresseur à piston Danfoss Maneurop MT36JG4FVE (3.0HP / 3PH) Compresseur à piston Danfoss Maneurop

MT40JH4EVE (3.3HP / 3PH) Danfoss Maneurop Compresseur à piston MT36JG4FVE (3.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT40JH4EVE (3.3HP / 3PH) Danfoss Maneurop Compresseur à piston MT36JG4FVE (3.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT40JH4EVE (3.3HP / 3PH) Compresseur à piston Danfoss Maneurop 3KFHB4 (3.6PH) 4.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT56HL4BVE (4.6HP / 3PH) Compresseur à piston Danfoss Maneurop MT64HM4DVE (5.3HP / 3PH) Compresseur à piston Danfoss Maneurop MT72HN4AVE (6.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT80HP4AVE (6.6HP / 3PH) Compresseur à piston Danfoss Maneurop MT72HN4AVE (6.0HP / 3PH) Compresseur à piston Danfoss Maneurop MT80HP4AVE (6.6HP / 3PH) Compresseur à piston Danfoss Maneurop 4.0 Compresseur à piston MT144HV4AVE (12,0HP / 3PH) Compresseur à piston Danfoss Maneurop MT160HW4EVE (13.3HP / 3PH) Compresseur à piston Danfoss Maneurop MTZ22JC5VE (2.0HP / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ22JC4AVE (2.0HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ28JE5AVE (2,3 HP / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ28JE4AVE (2,3 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ32JF5AVE (2,6 CV / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ32JF4BVE (2.6HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ36JG5AVE (3.0HP / 1PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ36JG4BVE (3.0HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ40JH4AVE (3,3 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ50HK4CVE (4,0 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ56HL4BVE (4,6 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ64HM4CVE (5,3 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ72HN4AVE (6,0 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ80HP4AVE (6,6 CV / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ100HS4VE (8,3 CV / 3 PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ125HU4VE (10.0HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop MTZ144HV4AVE (12,0 HP / 3PH); [R134A, R404] Compresseur à piston Danfoss Maneurop NTZ048A4LR1A (2.0HP / 3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ068A4LR1A (3,5 CV / 3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ096A4LR1A (4,5 CV / 3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ108A4LR1A (5,0 CV / 3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ136A4LR1A (6,5 CV / 3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ215A4LR1A (10,0 HP / 3PH); [R134A, R404, R507] Compresseur à piston Danfoss Maneurop NTZ271A4LR1A (13.0HP / 3PH); [R134A, R404, R507] COMPRESSEUR MANEUROP 2.0HP MT22 MANEUROPE 2.0HP MT22 COMPRESSEUR MANEUROP COMPRESSEUR MTZ-22JE-4VE R404A MANEUROPE 2.30HP MT28JE-5PVE MT28-5VI / MT28-5VM COMPRESSEUR MANEUROP 2.30HP MT28JE-5PVE MT28-5VI / MT28-5VM COMPRESSEUR MANEUROPEUR 2.30H5 / R404A) COMPRESSEUR MANEUROP 2.8HP MTZ32-5VM (R134a / R404A / R507) COMPRESSEUR MANEUROP MT32JF5MVE 2-3 / 4HP ((R22) COMPRESSEUR MANEUROP 3.0HP MT36JG4FVE (MT36-4VI / MT36-4VM) (R22) COMPRESSEUR 3.0HP COMPRESSEUR MT36 MANEUROP 3.3HP MT40JH4EVE COMPRESSEUR MANEUROP 3.3HP MTZ40-JH4AVE COMPRESSEUR (R407A / C / F / R134A / R404A / R507) Compresseur MANEUROP MTZ-36-JG4AVE (R407C / R134a / R404A-R407C / R134a / R404A) -Compresseur JH4AVE (R134a / R404A) – Compresseur 3.3HP 3PH MANEUROP MTZ-44-HJ4AVE (R134a / R404A) – 3.5HP 3PH MANEUROP 4HP MTZ-50HK-4CVE (MTZ50-4VI / MTZ50-4VM) COMPRESSEUR (R134A / R404A) MANEUROP MTZ56HL3BVE R407c, R134a, R507a, R404a compresseur MANEUROP MT-64-4VM COMPRESSEUR MANEUR 64-4VM COMPRESSEUR

MANEUR COMPRESSEUR MT72-4VM COMPRESSEUR MANEUROP MT-80-4VM (6.5HP) Compresseur MANEUROP 6.6HP MT81HP4AVE COMPRESSEUR MANEUROP MTZ80HM4DVE COMPRESSEUR MANEUROP 8.5HP MT100-4VM COMPRESSEUR MANEUROPE 10HP MT100-4VM (MT100HS4DVE) COMPRESSEUR 10HP MT100-4VM (MT100HS4DVE) COMPRESSEUR MT12M10 MANHOP 4-COMPRESSEUR 10HP R22) COMPRESSEUR MANEUROP 10HP MTZ125HW4AVE (R404A / R134A / R507 / R407C) COMPRESSEUR MANEUROPE 12HP MT144-4VM COMPRESSEUR MANEUROPE 13.3HP MT160-4VM (MT160HW4DVE) COMPRESSEUR MANZVMER 10 COMPRESSEUR MANZVM4 (MT160HW4DVE) / 2 ') SER. KIT POUR MT-28 MANEUROP 7703009 (1-1 / 8 ' & 3/4 ') SER.

Product details

Gross weight 41.5 kg


Net weight 39 kg

EAN 5702428661973


Approval standard	CCC CE UL
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Cylinder	2
Description	MT064-4
Diameter [mm]	288 mm
Discharge connection height [mm]	74 mm
Discharge connection mounting torque [Nm]	90 Nm
Discharge connection pipe size [in]	3/4 in
Discharge connection rotolock size [in]	1 1/4 in
Discharge connection size [in]	1 1/4 in
Discharge connection sleeve pipe size [in]	3/4 in
Drawing number	8502012g
Economizer	No
Factory HP [bar]	25 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None

Gauge port LP	Schrader
Generation code	E
Glass mounting	Threaded
Glass torque [Nm]	50 Nm
GP LP torque [Nm]	15 Nm
High side max pressure (Ps)	27.8 bar
High Side TS Max	150 °C
High Side TS Min	-35 °C
High Side Volume	0.6 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	460 V
High value of voltage range at 60Hz [V]	506 V
IP protection class	IP55 (with cable gland)
Low side max pressure (Ps)	18.4 bar
Low Side TS Max	50 °C
Low Side TS Min	-35 °C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	340 V
Low value of voltage range at 60Hz [V]	414 V
LRA	64 A
MCC	14 A
Model number	MT64HM4DVE
Motor protection	Internal overload protector
Mounting torque [Nm]	15 Nm
Nominal cooling capacity 60 kBTU/h	64.51 kBTU/h
Nominal cooling capacity at 50Hz	14.4 kW
Nominal cooling capacity at 60Hz	18.9 kW
Number of starts per hour [Max]	12
Oil charge [L]	1.8 L
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	30 Nm
Oil reference	160P
Packaging height [mm]	550 mm
Packaging length [mm]	1150 mm
Packaging weight [Kg]	254 kg
Packaging width [mm]	800 mm
Packing format	Industrial pack
Packing quantity	6
Phase	3
Power connections	Spade
Refrigerant	R22
Refrigerant charge [kg] [Max]	5 kg
Relief valve	30 bar/8 bar

Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning Refrigeration MT
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets
Shipped instructions	Installation instructions
Shipped mounting	Mounting kit with grommets, bolts, nuts, sleeves and washers
Shipped oil	Initial oil charge
Suction connection height [mm]	265 mm
Suction connection mounting torque [Nm]	110 Nm
Suction connection pipe size [in]	7/8 in
Suction connection rotolock size [in]	1 3/4 in
Suction connection size [in]	1 3/4 in
Suction connection sleeve pipe size [in]	7/8 in
Swept volume [cm ³]	107.71 cm ³
Technology	Reciprocating
Test dif [bar] [Max]	30 bar
Test HP [bar] [Max]	30 bar
Test LP [bar] [Max]	25 bar
Torque earth [Nm]	3 Nm
Torque power [Nm]	3 Nm
Total height [mm]	413 mm
Type	MT
Type designation	Compressor
Viscosity [cP]	32 cP
Winding resistance for three-phase compressors with identical windings [Ohm]	2.44 Ohm

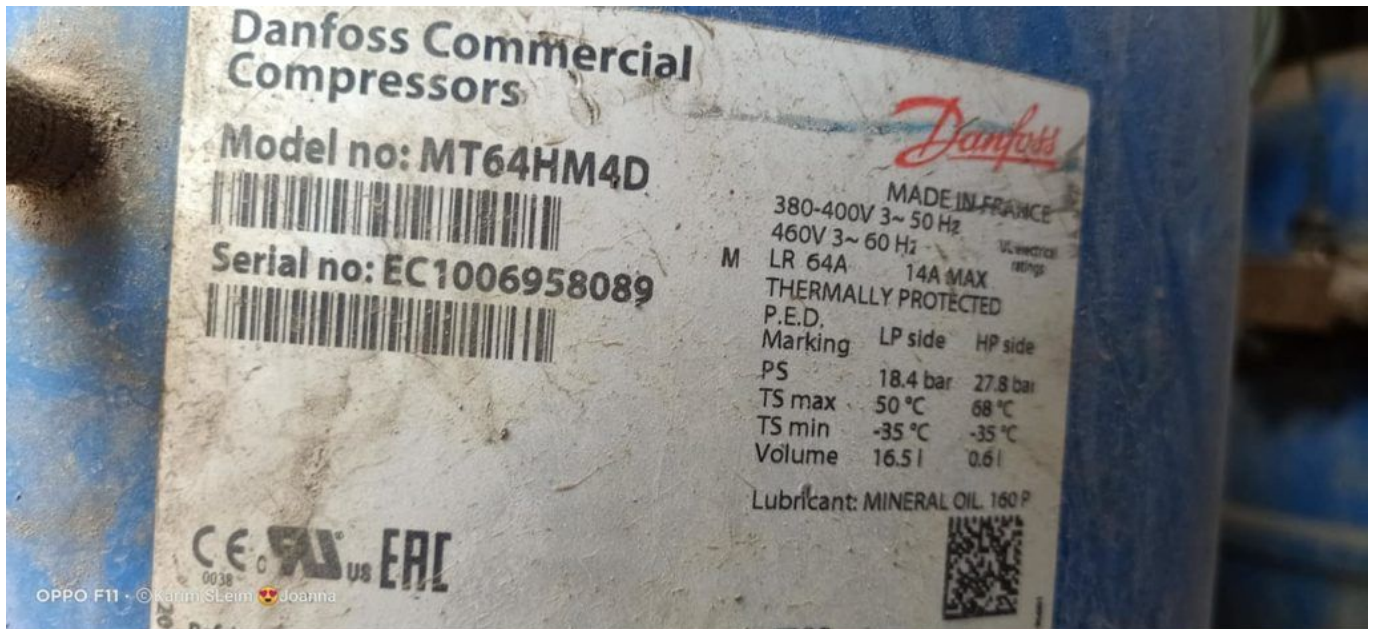

Private Picture Copyright: WWW.MBSM.PRO

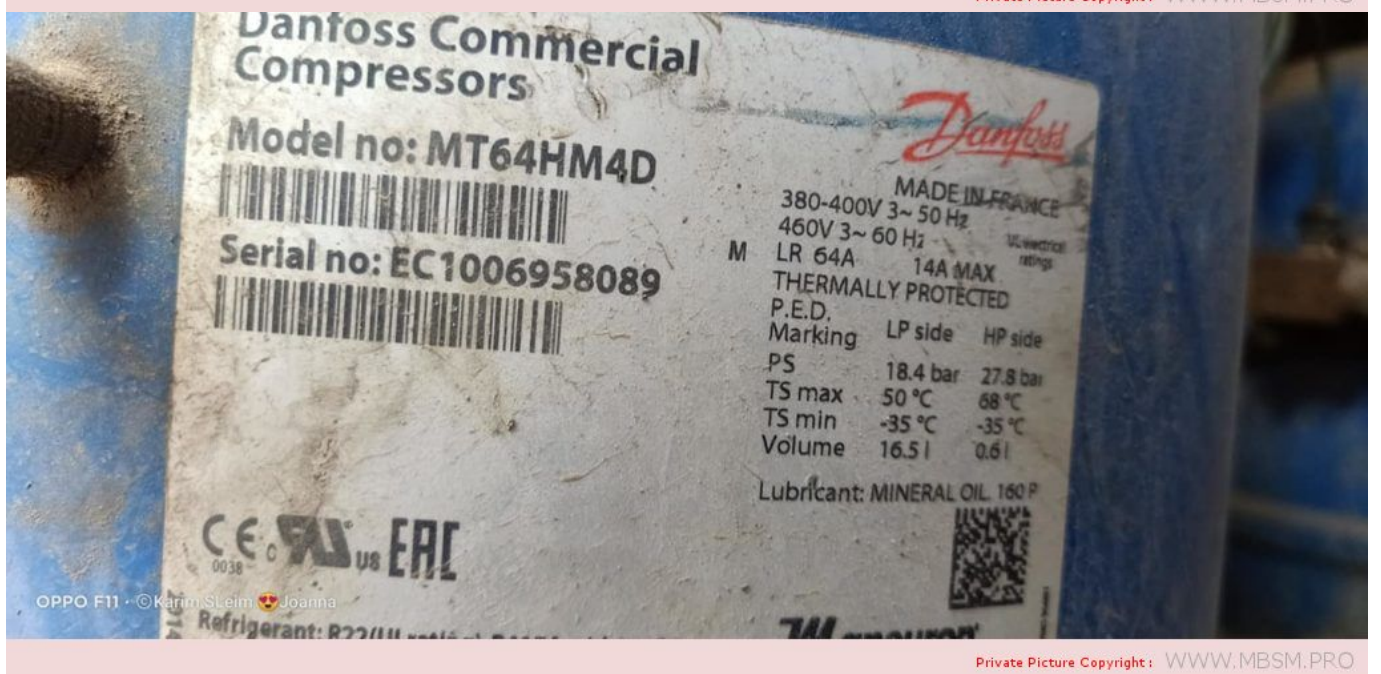

Private Picture Copyright: WWW.MBSM.PRO

Product : Compressor
 产地: 法国制造
 Plant : Made in France
 客户: 丹佛斯自动控制管理(上海)有限公司
 Customer service: Danfoss Automatic Controls Management (Shanghai) Co.Ltd
 地址电话: 上海市宜山路900号科技大楼C楼20层200233 / (021)61513000
 Address/Tel: 20th Floor Block C, Hi-Tech Building
 900 Yi Shan Road Shanghai 200233 / (021)61513000
 警告: 只有具备一定经验和安全程序
 培训的授权人员才可以进行安装和维修。
 Warning: The installation and maintenance
 should be performed by the authorized
 person only



Danfoss Commercial Compressors



型号: MT64HM4DVE


 序列号: EC1006983516


产地法国
 380-400V 3~ 50 Hz
 460V 3~ 60 Hz
 额定电流: 6.4A 最大工作电流: 1.4A
 过热保护
 低压倒
 最高额定压力 18.4 bar
 最高额定温度 50 °C
 最低额定温度 -35 °C

润滑油: MINERAL OIL 160 P



制冷剂: R22 或 R417A 仅和 160PZ



WARNING

Installation and servicing shall be performed by trained personnel only. Failure to observe these safety warnings could result in personal injury or death.
 1. Before servicing, disconnect power to the compressor. Discharge the charge of capacitors.
 2. Wear eye protection in place and securely fastened whenever power is applied to the compressor. Use this equipment on a controlled system only.
 3. The system contains refrigerant and oil under pressure. Release pressure from both the high and low side before servicing. Wear safety goggles.
 4. Do not touch the hot surface of the compressor.



CAUTION

Use only manufacturer's approved refrigerants, lubricants, and electrical components. Unauthorized refrigerants / lubricant / electrical component could cause fire, explosion, electrical shorting.
 For details refer to multi language instruction and technical documents available on Danfoss website at www.danfoss.com



Private Picture Copyright : WWW.MBSM.PRO

0937 217 184

MT64-4VM
KE1008211296
MT64HM4DVE

产品名称: 制冷压缩机
Product: Compressor
产地: 法国制造
Plant: Made in France
代理商: 丹佛斯自动控制管理(上海)有限公司
Customer service: Danfoss Automatic Control Management (Shanghai) Co.Ltd
地址电话: 上海市宝山顾900号科技大楼3楼30233 / (021) 61512000
Address/te: 900 Yi Shan Road Shanghai 200233 (021) 61512000
警告: 只有具备一定技能和安全教育于
熟练的维修人员才可以进行安装和维修。
Warning: The installation and maintenance
should be performed by the authorized
person only.

Compressor

Model no: **MT64HM4DVE**

Serial no: **KE1008211296**

MADE IN FRANCE

M	380-400V 3-30Hz	143 MAX
	480V 3-60Hz	143 MAX
	1.9 64.0A	
	Thermally protected	
P.E.D.	LP Side	HP Side
Marking	18.40 bar	27.20 bar
TS Max	39.5 °C	102.0 °C
TS Min	-23.9 °C	55.0 °C
Volume	16.1 l	64.1 l
Lubricant	Mineoil HP 180P	

CE, ENEC, ERE, C2000

Refrigerant: R22/R410A / R417A with 180PZ

WARNING

CAUTION



Private Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_MT64HM4DVE](#)Télécharger

[Mbsm_dot_pro_private_PDF_MT64HM4DVE-5](#)Télécharger

Mitsubishi, Refrigeration,
Compressor, for chiller,
JH527YEB, 10HP, 380 à 420 V 50 Hz,
460 V 60 Hz, 29,7 kW, 74 kg, R22

Category: compressor, Non classé
written by www.mbsm.pro | 2 May 2021


Model	Horsepower	Power	Refrigeration capacity			Voltage	Weight	Highth
	HP		KW	Frequenc y	KW			
JH512-Y	4HP	3.2	50Hz	13.1	11.3	N.T.Y.X. J	48.5	390.4
			60Hz	15.6	13.4			
JH513-Y	5HP	3.75	50Hz	14.3	12.3	N.T.Y.X. J	49	390.4
			60Hz	17	14.6			
JH515-Y	5.5HP	4.1	50Hz	16.3	14	N.T.Y.X. J	49	390.4
			60Hz	19.3	16.6			
JH516-Y	6HP	4.5	50Hz	17.1	15.2	T.Y	49	390.4
			60Hz	20.7	17.8			
JH517-Y	6.33HP	4.75	50Hz	18.7	16.1	T.Y.X.J	49	390.4
			60Hz	22	18.9			
JH518-Y	6.5HP	4.85	50Hz	19.9	17.1	T.Y.X	54.5	415.4
			60Hz	23.3	20			
JH519-Y	7.5HP	5	50Hz	21.3	18.3	T.Y.X.J	54.5	415.4
			60Hz	24.9	21.4			
JH521-Y	7.5HP	5.5	50Hz	23.3	20	T.Y.X.J	54.5	415.4
			60Hz	27.6	23.7			
JH522-Y	8HP	6	50Hz	25.1	21.6	T.Y.X	54.5	415.4
			60Hz	29.2	25.1			
JH525-Y	9.33HP	7	50Hz	27.3	23.5	T.Y.X.J	74.5	441.6
			60Hz	32	27.5			
JH527-Y	10HP	7.5	50Hz	29.7	25.5	T.Y.X.J	74.5	441.6
			60Hz	34.8	29.9			
JH529-Y	10.67HP	8	50Hz	31.9	27.4	T.Y.X	74.5	441.6

Private Picture Copyright : WWW.MBSM.PRO

Mitsubishi Refrigeration Compressor JH527YEB 10HP

Données techniques

Model	Horsepower	Power	Refrigeration capacity			Voltage	Weight	Highth
	HP		KW	Frequenc y	KW			
JH512-Y	4HP	3.2	50Hz	13.1	11.3	N.T.Y.X. J	48.5	390.4
			60Hz	15.6	13.4			
JH513-Y	5HP	3.75	50Hz	14.3	12.3	N.T.Y.X. J	49	390.4
			60Hz	17	14.6			
JH515-Y	5.5HP	4.1	50Hz	16.3	14	N.T.Y.X. J	49	390.4
			60Hz	19.3	16.6			
JH516-Y	6HP	4.5	50Hz	17.1	15.2	T.Y	49	390.4
			60Hz	20.7	17.8			
JH517-Y	6.33HP	4.75	50Hz	18.7	16.1	T.Y.X.J	49	390.4
			60Hz	22	18.9			
JH518-Y	6.5HP	4.85	50Hz	19.9	17.1	T.Y.X	54.5	415.4
			60Hz	23.3	20			
JH519-Y	7.5HP	5	50Hz	21.3	18.3	T.Y.X.J	54.5	415.4
			60Hz	24.9	21.4			
JH521-Y	7.5HP	5.5	50Hz	23.3	20	T.Y.X.J	54.5	415.4
			60Hz	27.6	23.7			
JH522-Y	8HP	6	50Hz	25.1	21.6	T.Y.X	54.5	415.4
			60Hz	29.2	25.1			
JH525-Y	9.33HP	7	50Hz	27.3	23.5	T.Y.X.J	74.5	441.6
			60Hz	32	27.5			
JH527-Y	10HP	7.5	50Hz	29.7	25.5	T.Y.X.J	74.5	441.6
			60Hz	34.8	29.9			
JH529-Y	10.67HP	8	50Hz	31.9	27.4	T.Y.X	74.5	441.6

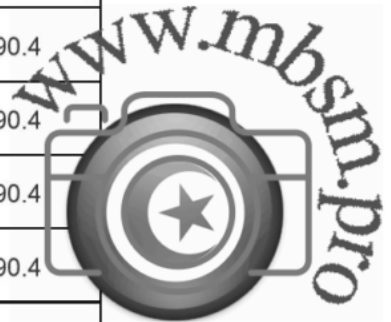

Private Picture Copyright : WWW.MBSM.PRO

Production Description

compresseur de réfrigération mitsubishi
modèle JH527YEB pour refroidisseur

Modèle	jh527yeb
Puissance en chevaux (Hp)	10,0
Réfrigérant	R22
An	2019
Couleur	Noir
Moq	1
type	Piston
Poids (kg)	74,5
Origine	JAPON
Emballage	Dessin animé / caisse en bois



REFRIGERANT COMPRESSOR

JH527YEB

MODEL

VOLT. 380~415 400~460 V	PHASE	3
REFRIGERANT R-22	FREQ.	50 / 60 Hz
AP 1.3 MPa	SP	3.9 MPa
DP 1.3 MPa	DT	-30 °C

DATE 2007 02

SERIAL 79722112

MITSUBISHI ELECTRIC CORPORATION
JAPAN





Private Picture Copyright: WWW.MBSM.PRO

**CUBIGEL, 1/2 Hp, ELECTROLUX,
COMPRESSEUR, ZANUSSI, P12TN, HMBP,
R22, 220/240V 50Hz**

Category: compressor

written by mahdi miled | 2 May 2021



Private Picture Copyright : WWW.MBSM.PRO

Détails techniques

puissance 1/2 Hp – cylindrée 12,00 cm³

220/240V 50Hz

CUBIGEL

ZANUSSI

Zanussi Armoire réfrigérée ALP221 (110495), ALN221 (110501), AKP221 (111678), AKP221 (111685), DVP110V12V (730236), DVP111V12V (730237), MVP112V12V (730238), EDVN1100 (730239), EDVN1101 (730240), DVP130V12V (730260), DVP131V12V (730261), EEVNI1301 (730262), EEVN1300 (730263), EEVN1301 (730264), DVN130V12V (730265), EDVN1300 (730266), MVP130V12V (730277), MVP131V12V (730278), EMVN1300 (730289), EMVN1300 (730290), MVP110V12V (730297), MVP111V12V (730298), EMVN1100 (730305), EMVN1101 (730306), EDVP1302 (730315), EDVN1302 (730321), CA45ALHG (730331), CA45SSHG (730347), CA45ALCG (730348), CA45SSCG (730349), CA38ALHG (730364), CA38SSHG (730365), CA38ALCG (730366), CA38SSCG (730367), CA45ALMG (730403), CA45SSMG (730405), CA38ALMG (730417), CA38SSMG (730422), DVP13V14V (734021)

Zanussi Cellule de refroidissement BC11 (110010), BCF11 (110016), EEVA10/1 (739021), EEVAC10/1 (739027), ATPE061 (771000), ATCE061 (771006)



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_danfoss_P12TN_R22_220_50Télécharger



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_huayi_compressor_P12TN_R22_230_60Télécharger

ASPERA, COMPRESSEUR, 1 / 3HP++ (Big), NE6181E, CSIR, HMBP, R22, 220-240V

Category: compressor

written by www.mbsm.pro | 2 May 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

NE6181E 1 / 3HP / R22

- **Détails techniques**

puissance 1/3 CV, cylindrée 7,28 cm³
220 / 240V 50Hz

- LIGNE LIQUIDE (DIAMÈTRE) : 1/4
- LIGNE D'ASPIRATION (DIAMÈTRE) : 5/16
- BRÈVE DESCRIPTION



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NE6181ETélécharger

**COMPRESSEUR, CAJ4517T, AJ4TL1GF707,
TECUMSEH, Tecumseh Europe, HP: 1-1 /
2, LRA: 45, R404**

Category: compressor

written by www.mbsm.pro | 2 May 2021



Private Picture Copyright : WWW.MBSM.PRO

COMPRESSEUR, CAJ4517T, AJ4TL1GF707, TECUMSEH, Tecumseh Europe, HP: 1-1 / 2, LRA: 45, R404