

Mbsm.pro, Compressor, Hermetic,
Tecumseh, CAJ2464Z, LBP, R404A,
R507A, 220-240/1/50, CSR, 34.4 cm³,
1.5 Hp, 1 1/2 Hp

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, Hermetic, Tecumseh, CAJ2464Z, LBP, R404A, R507A, 220-240/1/50, CSR, 34.4 cm³, 1.5 Hp, 1 1/2 Hp

Mbsm.pro, Compressor, 7/8 HP, R404A,
Secop ,Commercial Freezer, Sc21cl,
104L2322, Sc21cl104L2322, 104L2322,
104L 2322, LBP, 2322

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, 7/8 HP, R404A, Secop ,Commercial Freezer, Sc21cl,
104L2322, Sc21cl104L2322, 104L2322, 104L 2322, LBP

Mbsm.pro, Compressor, Embraco,
Aspera, MA8DCV04, NT6220GK, Hermetic
reciprocating compressor , R404a,
MHBP, 17.4CC, 3/4Hp, ++big, 240V~50Hz

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, Embraco, Aspera, NT6220GK, Hermetic reciprocating compressor , R404a, MHBP, 17.4CC, 3/4Hp, ++big, 240V~50Hz

Mbsm.pro, Embraco, Aspera, NEU2155GK, R404A, 220 – 240V 1~ 50 Hz, 3/4 hp , 12.1 cm³, R404A, freezing (LBP), csir, 12.12cc

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Embraco, Aspera, NEU2155GK, R404A, 220 – 240V 1~ 50 Hz, 3/4 hp , 12.1 cm³, R404A, freezing (LBP), csir, 12.12cc

Mbsm.pro, Compressor, ACC, Cubigel, Huayi, Electrolux, ZEM, MPT14LA, MPT14RA, LBP, R404A, R507, 1/2HP, 220-240V

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO

Compressor Tecumseh L` Unite CAJ2432Z, LBP – R404A, 220 – 240V, 50 Hz, 1 phase, discharge: 18.3 cm³, oil type: POE, oil charge: 887 cm³, electrical equipment: CSR, cooling power 381 W at -35 / +40 °C, connection: suction: 1/2 inch, discharge: 5/16 inch, sound level: 56 dBA, start capacitor: 8 8 uF/250V, run capacitor: 15 uF/400V, expansion device: capillary or expansion valve, height: 271 mm, weight: 21.5kg

Type: Low back pressure (LBP)

Refrigerant: R404a/507

Displacement: 14.32cm³

Power: 1/2CV

Voltage: 230V – 50Hz

Single-phase

Motor type: CSR

Weight: 13.4 kg

Evaporation temperature

-40°C: 243W


-30°C: 420W

-25°C: 535W

-10°C: 988W



Private Picture Copyright : WWW.MBSM.PRO

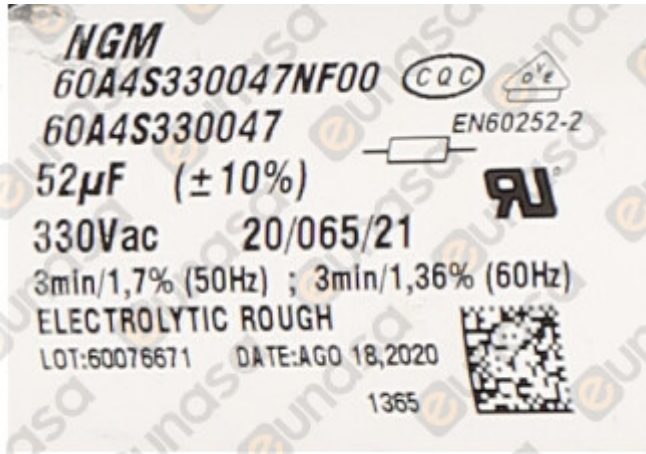

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_MPT14LATélécharger

COMPRESSOR, ASPERA, NJ2192GK, 1.1/4

HP, 220V, 1PH, R404A, LBP, 1199w

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright: WWW.MBSM.PRO


Compressor ASPERA NJ2192GJ | NJ 2192 GJ

Product replaced the old model NJ2192GK

Refrigerant	R404A
Working range[stC] LBP	-40 do -10
Nominal capacity [W] (evaporating temperature -23,3C, Condensing temperatur +54,4C)	1199
Power supply	220-240V 50Hz
Engine type	CSR
Displacement [cm ³]	26,10
Weight [kg]	22
Condensing temperature +55 C	

Evaporating Temperature	Cooling Capacity +/-5%			Power Consumption +/-5%	Current Consumption +/-5%
	(kcal/h)	(W)	(Btu/h)	(W)	(A)
-40					
-35					
-30		797		773	4,37
-25		1084		908	4,92
-20		1413		1045	5,49
-15		1784		1181	6,10
-10		2196		1317	6,72

Refrigerant: R404A

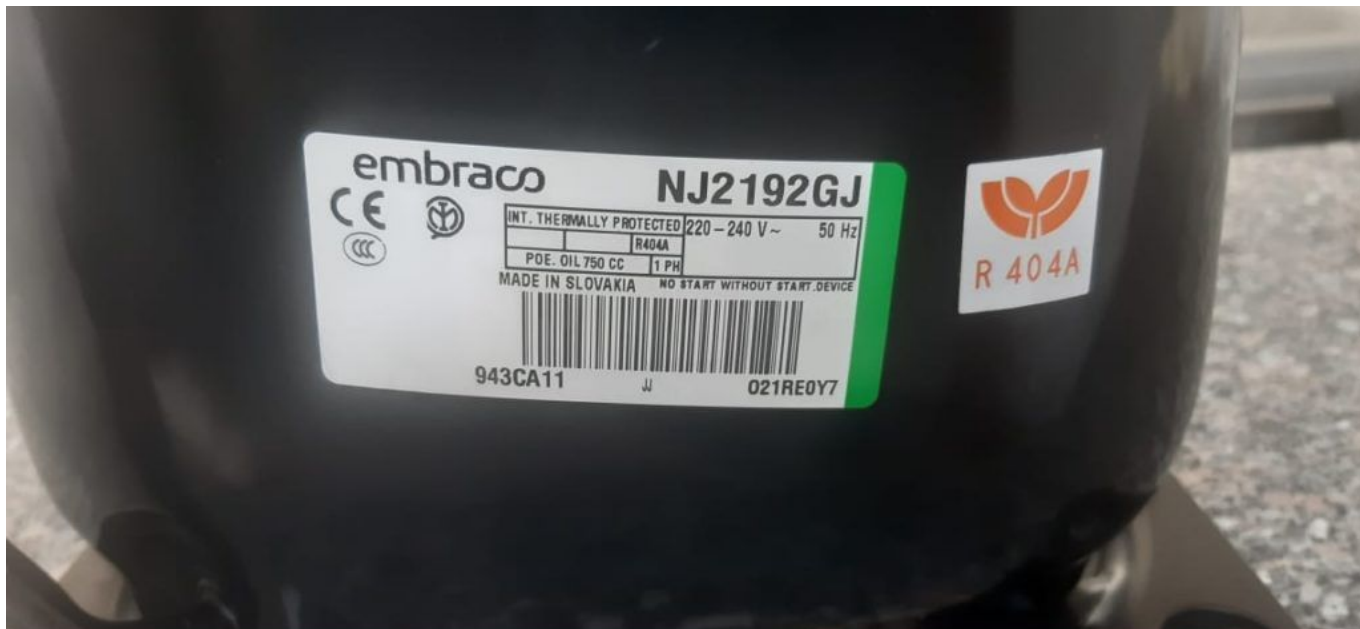

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_pdf_NJ219GJTélécharger

**COMPRESSOR, MX21TBa, R404A, 1HP,
CUBIGEL, HMBP, 220/240V, 50Hz, 20,72
cm³**

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright : WWW.MBSM.PRO

Détails techniques

220/240V 50Hz

puissance 1 HP – cylindrée 21,75 cc

gaz R404a/R507 HMBP

...et d'autres dispositifs

MX21TB – ACC – CELLI

MX21TB – CUBIGEL – ELECTROLUX

605093 – GEV – ITV



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_danfoss_MX21TBa_R404A_220_50Télécharger

Brand:	Cubigel
UPC:	3070063
Manufacturer reference:	MX21TBa
Application:	HMBP
Power supply:	220/240V 50Hz
Cooling capacity:	3047 W
Horsepower:	1 Hp
Displacement:	21.7 cm ³
Refrigerant:	R404a/R507
Weight:	17.5 kg
Motor type:	CSR
Type:	Hermetic reciprocating compressor

COMPRESSOR, DONPER, NE6213CK, 1/2hp, R404a

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright : WWW.MBSM.PRO

Ne6213Ck Compressor R404A Med Temp 12 Disp 1080W @ -5 1/2Hp 240V 50Hz



Private Picture Copyright : WWW.MBSM.PRO



NE6213CK
220-240V-50Hz 1PH
THERMALLY PROTECTED
RoHS CE ACC0083 2
R404A
0126741729011801180

NE6213CK COMPRESSOR R404A MED TEMP 12 DISP 1080W @ -5 1/2HP 240V 50HZ

Displacement: 12 cm³

Power: 1/2 HP

Oil Charge: 450 +/- 10 mL

Cooling capacity: 1080W @-5 SST

COP: ASHRAE 1.80

Private Picture Copyright : WWW.MBSM.PRO

Testing condition:

Test conditions	H.B.P	
	ASHRAE	CECOMAF
Evaporating Temp.	+7.2°C	+5°C
Ambient Temp.	+35.0°C	+32°C
Condensing Temp.	+54.4°C	+55°C
Suction Temp.	+35.0°C	+32°C
Subcooling Temp.	+46.1°C	+55°C

3. Running Condition

Ambient temp.	0~43°C
Evaporating temp.	-15~10°C
Voltage range	187~264V
Max. condensing temp.	65°C
Max. winding temp.	130°C
Max. shell temp.	95°C
Max. discharge temp.	120°C
Start voltage	187V [5/5bar(abs)]
Shell min. resistance to pressure	35bar

Private Picture Copyright : WWW.MBSM.PRO

1. Compressor Type

Compressor model	NE6213CK
Rated voltage/frequency	220-240V~50Hz
Refrigerant	R404A
Application	High back pressure (H.B.P)
Cooling method	Fan Cooling
Start torque	High starting torque (HST)
Control device	Capillary tube
Motor type	CSIR

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ne6213ck-compressorTélécharger

Tecumseh, Compressor, 5/8HP, HMBP – R404A , R448A , R449A, MBP, CAJ9480Z, 230V

Category: compressor

written by www.mbsm.pro | 24 February 2022



Private Picture Copyright : WWW.MBSM.PRO

Caractéristiques techniques

- Marque : TECUMSEH UNITÉ HERMÉTIQUE
- Modèle : CAJ9480Z-R
- CYLINDRÉE (CM³)15,2
- FLUIDER404A , R448A , R449A
- APPLICATIONHMBP
- PLAGÉ D'APPLICATION-25/+15
- PUISSANCE (W)1159
- PUISSANCE FRIGORIFIQUE (TK+40°C)15/3350 5/2355 -10/1294 -25/609
- TENSION (V)240/1/50
- DÉMARRAGECSR
- I.MAX (A)6,7
- Ø ASPIRATION1/2
- Ø REFOULEMENT5/16
- DIMENSIONS (MM)235x178x280
- Gaz: **R-404a**
- Température/Pression: **Haute Pression**
- Puissance: **5/8 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **15.2 cm³**
- Cons.Énergie -25°C: **496 W**
- Cons.Énergie -10°C: **669 W**
- Cons.Énergie -5°C: **718 W**
- Cons.Énergie 0°C: **762 W**
- Cons.Énergie +5°C: **798 W**
- Cons.Énergie +10°C: **828 W**
- T° De Condensation: **40 °C**
- Capacité Frigorífica -25°C: **524 Kcal/h**
- Capacité Frigorífica -20°C: **692 Kcal/h**
- Capacité Frigorífica -15°C: **887 Kcal/h**
- Capacité Frigorífica -10°C: **1113 Kcal/h**
- Capacité Frigorífica -5°C: **1374 Kcal/h**
- Capacité Frigorífica 0°C: **1677 Kcal/h**
- Capacité Frigorífica 5°C: **2025 Kcal/h**
- Capacité Frigorífica 10°C: **2425 Kcal/h**
- Tipo Test: **EN.12900**

Compresseur L'unité Hermetique – Tecumseh CAJ9480Z – R404A, R449A, R407A, R452A
220 – 240V 1~ 50 Hz

Cylindrée = 15.2 CM³

APPLICATIONS = HBP / MHBP

Moteur type: CSR



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO





● ○ REDMI NOTE 9 PRO
∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



● ○ REDMI NOTE 9 PRO
∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



● ○ REDMI NOTE 9 PRO
∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_caj9480Z_2494-spec Télécharger

Compresseur AJ = Le produit de référence associant silence, fiabilité et

efficacité du froid commercial.

Product Code	Model Number	Compressor Horsepower	Compressor Displacement	Cooling Oil Charge
	CAJ9480Z-FZ	5/8 HP	15.2 cm3/rev	Fan 475 ml
	CAJ9510Z-FZ	1 HP	18.3 cm3/rev	Fan 475 ml
	CAJ9513Z-FZ	1 1/8 HP	24.2 cm3/rev	Fan 475 ml
	CAJ4517Z-FZ	1.25 HP	25.95 cm3/rev	Fan 475 ml
	TAJ4517Z-TZ	1.25 HP	25.95 cm3/rev	Fan 475 ml
	CAJ4519Z-FZ	1.5 HP	34.45 cm3/rev	Fan 475 ml
	TAJ4519Z-TZ	1.5 HP	34.45 cm3/rev	Fan 475 ml

Compresseur, MPT18LA, R-404A / R-507, Cubigel Compressors, 1/2 HP, LBP, CSR

Category: compressor

written by www.mbsm.pro | 24 February 2022



cubigel
compressors

MPT18LA
220-240V-50Hz PH1

R404A
R507

THERMALLY PROTECTED

CE

MADE IN SPAIN

9041257434100130

09121

Le compresseur à piston hermétique à basse température Cubigel MPT18LA est utilisé dans les équipements de réfrigération avec des températures de fonctionnement d'évaporation inférieures à -20 °C:

1. Réfrigérateurs
2. Congélateurs
3. Réfrigérées vitrines
4. Chambres frigorifiques pour produits surgelés.

Caractéristiques du compresseur Cubigel MPT18LA:

- Travailler sur le fréon R404a / R507a
- Application de LBP (Low Dack Pressure)
- Volume du cylindre 18 cm³
- Capacité d'huile 450 cm³
- Type d'huile ISO VG 32 ESTER
- Courant de démarrage 19 A
- Poids 12,5 kg

Caractéristiques du moteur du compresseur Cubigel MPT18LA:

- Type de moteur CSR
- Puissance 1/2 CV
- Tension 200-220V 50Hz
- Tension admissible 170-242 V



cubigel
compressors

MPT18LA
220-240V-50Hz PH1

R404A
R507

THERMALLY PROTECTED

CE

MADE IN SPAIN

9041257434100130

09121

Mbsm_dot_pro_private_PDF_compresseur-acc-cubigell-electrolux-MPT16LATélécharger

Mbsm_dot_pro_private_PDF_huayi_compressor_mpt18la__r404a_220_50_1Télécharger