Mbsm.pro, Compressor, hermetic, piston, Embraco, NT2178GK, 3/4 hp, Lbp, 17.40 cm3, R404A, R452A, R507A


Category: compressor
written by www.mbsm.pro | 27 November 2023



Mbsm.pro, Compressor, hermetic, piston, Embraco, NT2178GK, 3/4 hp, Lbp, 17.40 cm3, R404A, R452A, R507A

Mbsm.pro, Compressor, Hermetic, Tecumseh, CAJ2464Z, LBP, R404A, R507A, 220-240/1/50, CSR, 34.4 cm³, 1.5 Hp, 1 1/2 Hp

Category: compressor
written by www.mbsm.pro | 27 November 2023

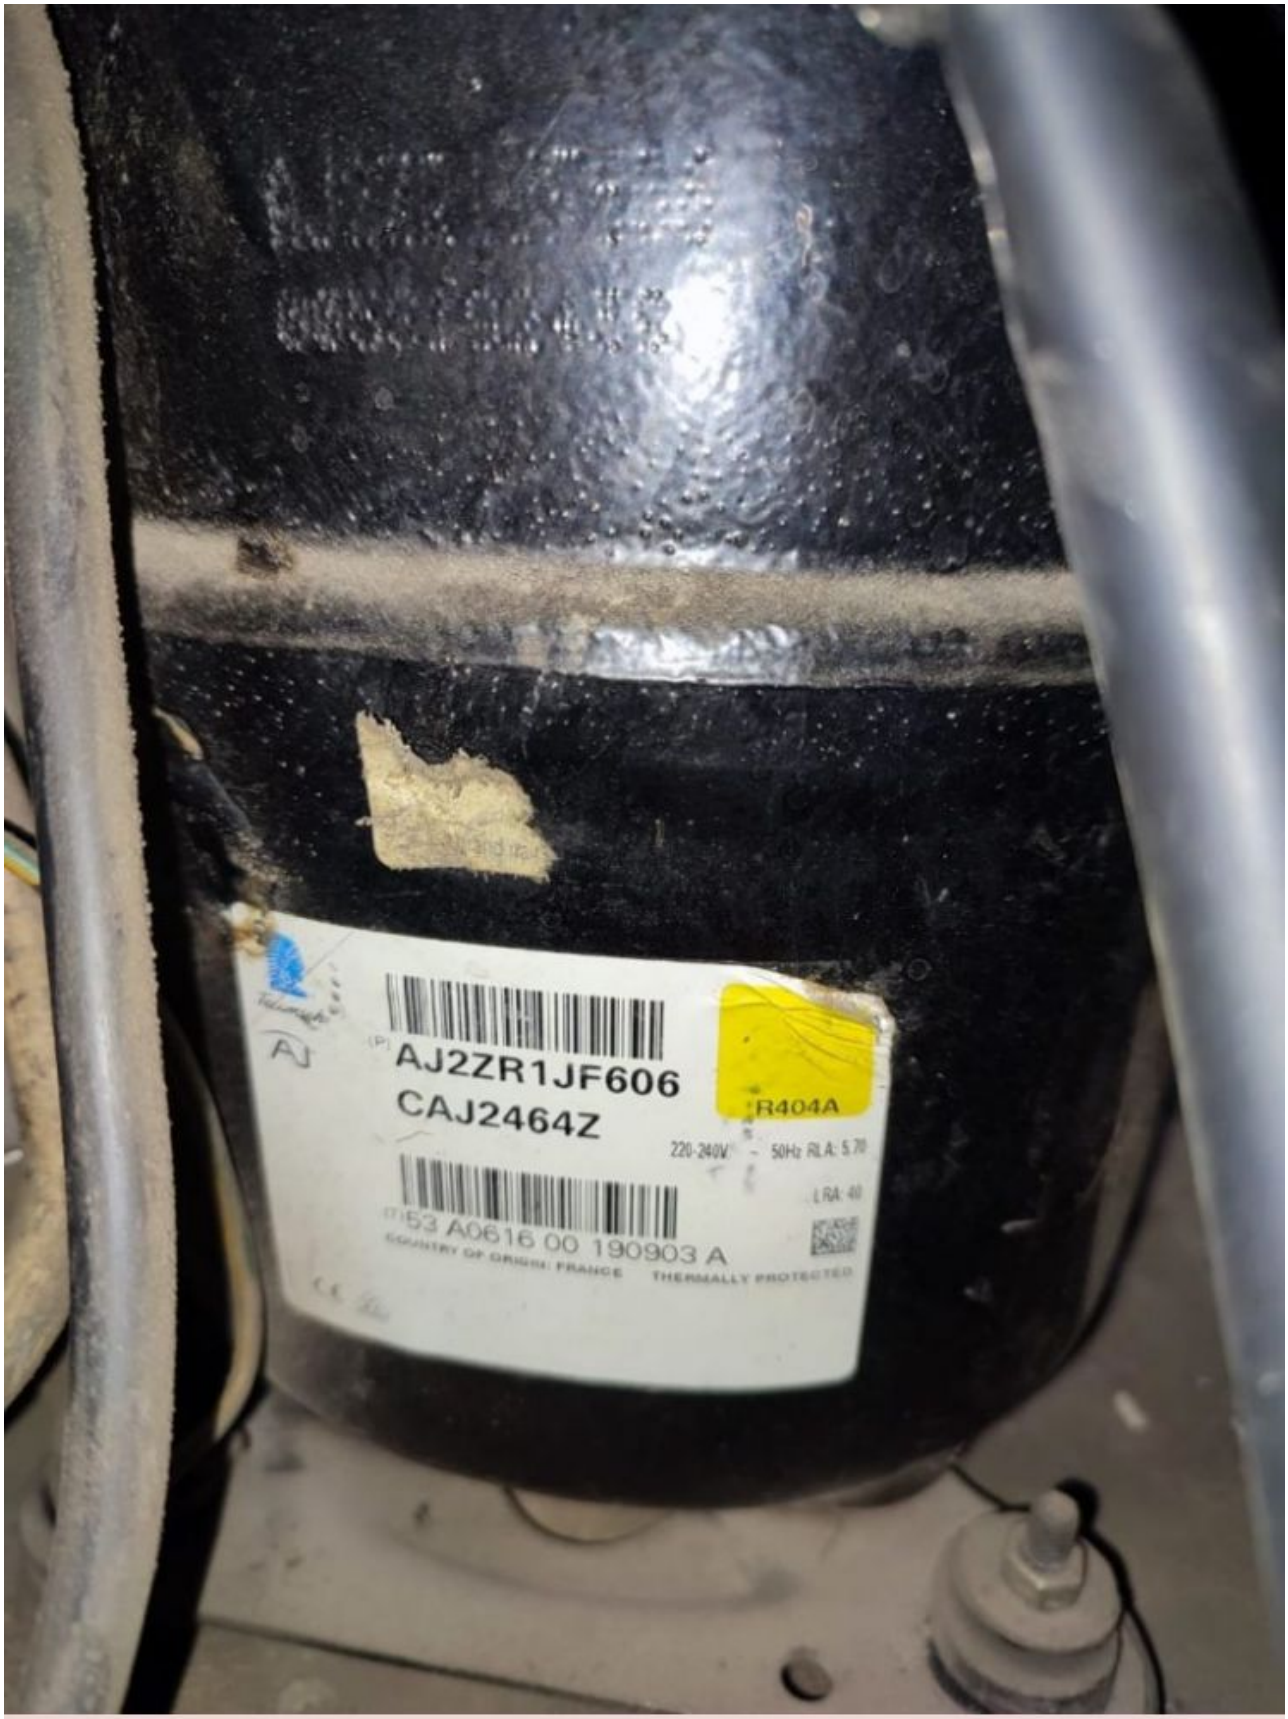

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Hermetic, Tecumseh, CAJ2464Z, LBP, R404A, R507A, 220-240/1/50, CSR, 34.4 cm³, 1.5 Hp, 1 1/2 Hp

COMPRESSEUR, EMBRACO, ASPERA, NEK6213GK, HMBP, 1/2+ hp, 614 W

Category: compressor
written by www.mbsm.pro | 27 November 2023



- Puissance frigorifique à -10°C 1305 W
- Puissance électrique à -10 °C 614 W
- Puissance en cheval 1/2+ CV
- Alimentation 220-240 V 50 Hz
- Gaz R404a/R507 HMBP
- Moyenne et haute pression
- Complet avec starter, condensateur, boitier et système de fixation

Codes fabricants

- ALPENINOX (anciennement NE9213GK)
- ASCASO-VF.792 (anciennement NE9213GK)
- ASPERA-NE9213GK (anciennement NE9213GK)
- ELECTROLUX-85551 (anciennement NE9213GK)
- EMBRACO-NE9213GK (anciennement NE9213GK)
- EUNASA-21075 (anciennement NE9213GK)
- EURFRIGOR-RB000447 (anciennement NE9213GK)
- ITV-302035 (anciennement NE9213GK)
- WHIRLPOOL-485409918033 (anciennement NE9213GK)
- ZANUSSI-85551 (anciennement NE9213GK)
- ALPENINOX-91161
- ANGELO PO-3138720
- ASPERA-NEK6213GK
- ASPERA-NEK6213GK-CSIR
- ELECTROLUX-91161
- EMBRACO-NEK6213GK
- EMBRACO-NEK6213GK-CSIR
- EMMEPI-8C1300
- FAST RICAMBI-605.125
- GEV-605.125
- MIGEL-1RF173
- SAGI-3138720
- UGOLINI-22807-13010

• VND-605.125
• ZANUSSI-91161

Compressor ASPERA NEK6213GK | NEK 6213 GK

Refigerant	R404A/R507
Working range[stC] **MBP**	-20 do +10
Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C)	1761
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm³]	12,11
Weight [kg]	11,6

Evaporating temperature +55 C

Evaporating Temperature	**Cooling Capacity +/-5%**			**Power Consumption +/-5%**	**Current Consumption +/-5%**	**Gas Flow Rate +/-5%**	**Efficiency +/-7%**	
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-20	514	598	2.040	569	3,87	16,07	0,90	1,05
-15	643	747	2.551	642	4,13	20,19	1,00	1,16
-10	793	922	3.148	717	4,41	25,09	1,11	1,29
-5	966	1.124	3.835	792	4,70	30,85	1,22	1,42
0	1.163	1.352	4.615	868	5,02	37,57	1,34	1,56
5	1.384	1.610	5.493	946	5,36	45,32	1,46	1,70
10	1.631	1.896	6.472	1.025	5,72	54,18	1,59	1,85

Substitutes for this compressor are: Electrolux/Cubigel MP12TB , Danfoss/Secop SC10DL , L’Unite Hermetique/Tecumseh CAE9470Z

Refrigerant: R404A , R507

COMPRESSEUR EMBRACO NEK6213GK
220/240V 50Hz
puissance 1/2 Hp, le déplacement 12,12 cc
gaz réfrigérant R404a/R507 HMBP

LES CODES DE FABRICANT

091161 **ALPENINOX**
3138720 **ANGELO PO**
NEK6213GK **ASPERA**
NEK6213GK-CSIR **ASPERA**
091161 **ELECTROLUX PROFESSIONNEL**
NEK6213GK **EMBRACO**
NEK6213GK-CSIR **EMBRACO**
8C1300 **EMMEPI**
1RF173 **MIGEL**
3138720 **SAGI**
22807-13010 **UGOLINI**
091161 **ZANUSSI**

Alimentation	220/240 V-50 Hz-1 Ph
Chevaux	1/2 hp

Déplacement	12,11 cm3
Application	MHBP
Capacité frigorifique en conditions ASHRAE, R404A/R507	1,76 kW
Capacité frigorifique en conditions EN12900 MT, R404A/R507	0,97 kW
Réfrigérant	R404A, R452A, R507A
Aspiration	3/8″
Refoulement	1/4″
Poids	11,60 kg
Hauteur maximale	206 mm
LRA	19,30 A
Huile de recharge	350 cm3
Type d\'huile	POE 22 ester
Autres remarques	Accessoires de démarrage inclus
Technologie	Vitesse fixe
Type de refroidissement moteur	Ventilateur
Type moteur	CSIR
Type protection moteur	External

Spécifications Techniques

Réfrigérant	**R-404A - R-507A**	Technologie de compresseur	**Hermétique à piston**
Application	**Moyenne pression - Haute pression**	Plage d'application	**-20°C à +10°C**
Type de tension	**Monophasé**	Tension	**240 / 1 / 50**
Cylindrée	**12.1cm3**	Puissance frigorifique @ -10°C	**918W**
Intensité maximale	**6.01A**	Type moteur	**CSIR**
Détente	**Capillaire / Détendeur**	Diamètre aspiration ODF	**5/16"**
Diamètre refoulement ODF	**1/4"**	Entraxes de fixation	**170 x 70m**
Hauteur	**206mm**	Charge d'huile	**0.35l**

www.mbsm.pro
Private Picture Copyright : WWW.MBSM.PRO



Mbsm_dot_pro_private_PDF_nek6213GK-Catalogue_EmbracoTélécharger
Mbsm_dot_pro_private_PDF_nek6213GK-Catalogue_Embraco-1Télécharger

Embraco®

COMPRESSOR TECHNICAL DATA

Designation	**NEK6213GK**
Nominal Voltage/Frequency	**220-240 V 50 Hz**
Engineering Number	**959BA51**

A - APPLICATION / LIMIT WORKING CONDITIONS

1 Type	Hermetic reciprocating compressor		
2 Refrigerant	R-404A		
3 Nominal voltage and frequency	220-240 / 50	[V / Hz]	
4 Application type	Medium Back Pressure (Commercial Compressors R404A)		
4.1 Evaporating temperature range	-20°C to 0°C	(-4°F to 32°F)	
5 Motor type	CSIR		
6 Starting torque	HST - High starting torque		
7 Expansion device	Capillary tube or Expansion valve		
8 Compressor cooling		Operating voltage range	
		50 Hz	60 Hz
8.1 LBP (32ºC Ambient temperature)	-	-	-
8.2 LBP (43ºC Ambient temperature)	-	-	-
8.3 HBP (32ºC Ambient temperature)	-	-	-
8.4 HBP (43ºC Ambient temperature)	-	-	-
9 Maximum condensing pressures/temperature			
9.1 Operating (gauge)	25.7	[kgf/cm²] (365 psig)	/ ºC - ºF
9.2 Peak (gauge)	28.7	[kgf/cm²] (408 psig)	/ ºC - ºF
10 Maximum winding temperature	130	[°C]	

B - MECHANICAL DATA

1 Commercial designation	1/2+	[hp]
2 Displacement	12.11	[cm³] (0.739 cu.in)
2.1 Bore	27.775	
2.2 Stroke	10.000	
3 Lubricant charge	350	[ml] (11.84 fl.oz.)
3.1 Lubricants approved		
3.2 Lubricants type/viscosity	ESTER / ISO22	
4 Weight(with oil charge)	11.6	[kg] (25.57 lb.)
5 Nitrogen charge	0.2 to 0.3	[kgf/cm²] (2.84 to 4.27 psig)


C - ELECTRICAL DATA

1 Nominal Voltage/Frequency/Number of Phases	220-240 V 50 Hz 1 ~ (Single phase)	
2 Starting device type	Current Relay	
2.1 Starting device		
3 Start capacitor	53-64(330)	[µf(VAC minimum)]
4 Run capacitor	-	[µf(VAC minimum)]
5 Motor protection (external)	T0743/G6	
6 Start winding resistance	20.88	[Ω at 25ºC (77ºF)] +/- 8%
7 Run winding resistance	3.93	[Ω at 25ºC (77ºF)] +/- 8%
8 LRA - Locked rotor amperage (50 Hz)	-	[A] - Measured according to UL 984
9 FLA - Full load amperage L/MBP (50 Hz)	-	[A] - Measured according to UL 984
10 FLA - Full Load Amperage HBP (50 Hz)	-	[A] - Measured according to UL 984
11 Approval boards certification	IMQ	

Private Picture Copyright : WWW.MBSM.PRO

Refrigerant High &Low Pressure Temperature Chart ,R22 R410A ,R12 ,R134A ,R401A ,R409A ,R502 ,R404A ,R507A ,R408A ,R402A ,R600A

Category: Non classé,Solutions
written by www.mbsm.pro | 27 November 2023

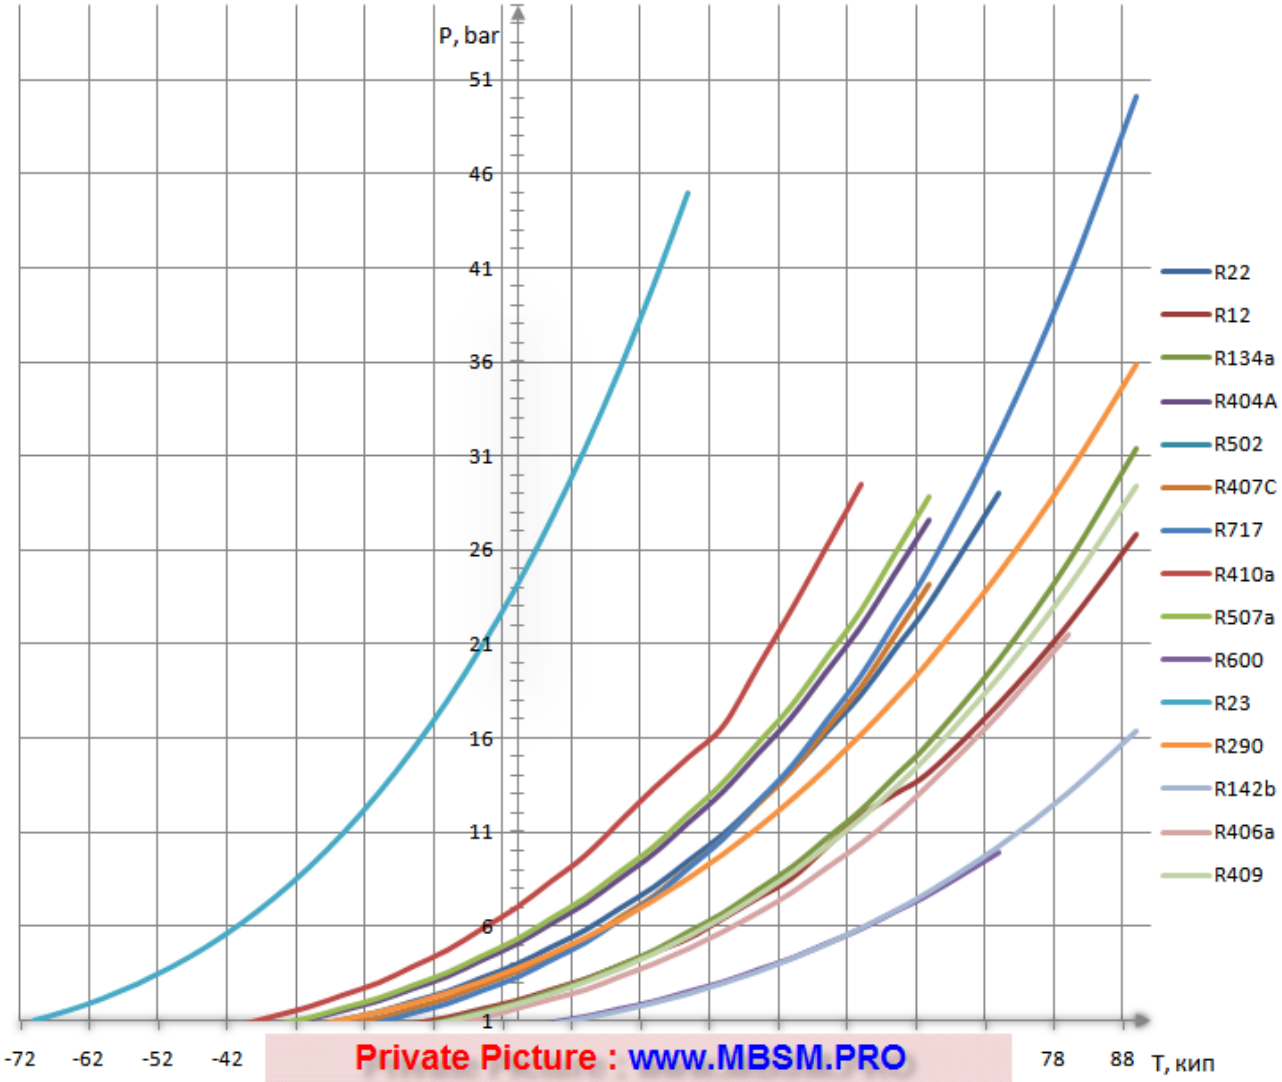

Refrigerant High &Low Pressure Temperature Chart ,R22 R410A ,R12 ,R134A ,R401A ,R409A ,R502 ,R404A ,R507A ,R408A ,R402A ,R600A