

Danfoss Refrigeration, R134a, GL90TG , 220-240V 50-60Hz, R134A , HBP , CSIR , compressor Haute pression avec condensateur

Category: Technologie, Tester ok
written by www.mbsm.pro | 4 May 2020




REDMI NOTE 8
AI QUAD CAMERA

Private Picture : www.MBSM.PRO

Danfoss Refrigeration, R134a, GL90TG, 220-240V 50-60Hz, R134A, HBP, CSIR, compressor Haute pression avec condensateur

230V ,compressor, Danfoss ,SC15MFX ,
made by Secop, R134a ,refrigeration,
CSIR , Moteur HP , R134a ,3 / 8HP
,HMBP ,1PH

Category: Technologie,Tester ok
written by www.mbsm.pro | 4 May 2020

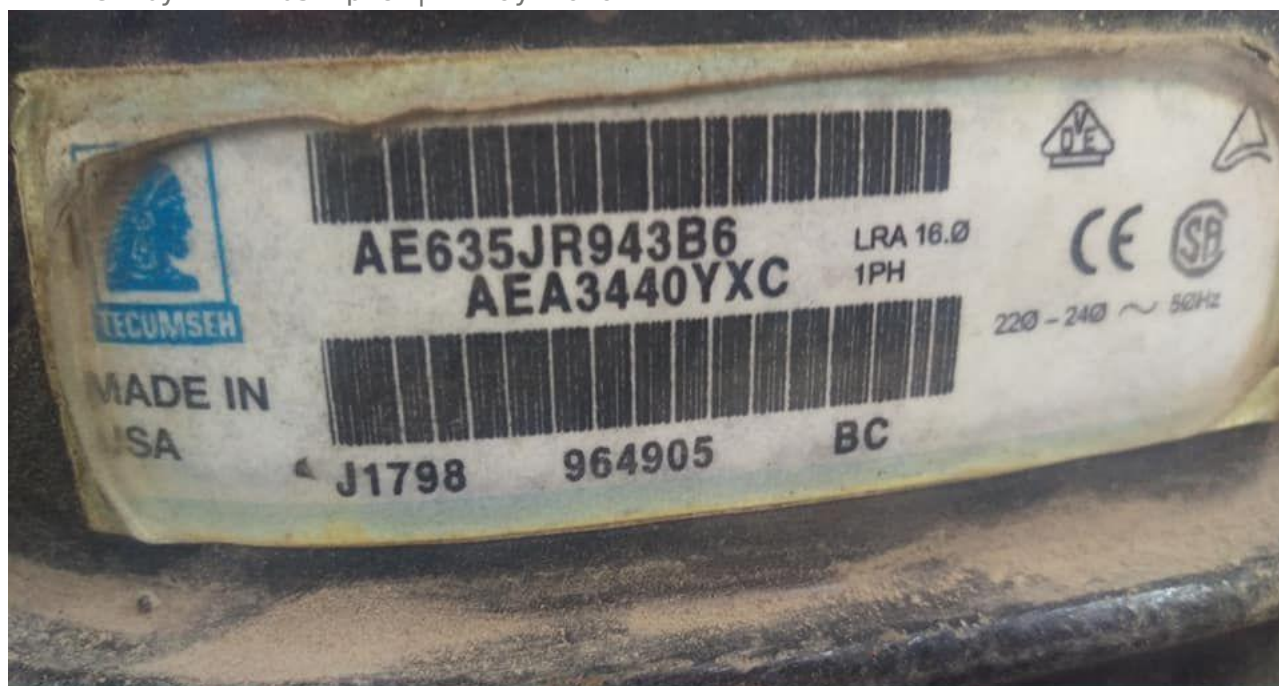

Private Picture : www.MBSM.PRO

PictureS Mbsm Dot Pro : www.mbsm.pro

230V ,compressor, Danfoss ,SC15MFX , made by Secop, R134a ,refrigeration, CSIR ,
Moteur HP , R134a ,3 / 8HP ,HMBP ,1PH

Danfoss ,Fridge Compressor ,NL7FT ,
1/4 HP ,R134a

Category: Non classé,Technologie,Tester ok
written by www.mbsm.pro | 4 May 2020




PictureS Mbsm Dot Pro : www.mbsm.pro

Danfoss ,Fridge Compressor ,NL7FT , 1/4 HP ,R134a

ZEL , Refrigeration ,Compressor
,Gml200a ,152w , 1/5 Hp
,220/240V/50Hz ,R134a

Category: Technologie,Tester ok
written by www.mbsm.pro | 4 May 2020

MADE IN EGYPT



unionaire SPECIFICATIONS

MODEL	RD 310
REFRIGERANT AMOUNT	R134a / 100g
RATED INPUT OF LAMP	15 W
RATED VOLTAGE	220-240V~
RATED CURRENT	1.1A
RATED FREQUENCY	50Hz
CLIMATE CLASS	T
POWER INPUT	130 W
GROSS VOLUME	310 L
CAPACITY (NET)	290 L
GROSS VOLUME cabinet	227
Net volume cabinet	210
PRODUCTION DATE	JULY/2108

Private Picture Copyright : WWW.MBSM.PRO

ZEL , Refrigeration , Compressor , Gml200a , 152w , 1/5 Hp , 220/240V/50Hz , R134a

HFC refrigerant , hydrofluorocarbons , is the third generation, of fluorinated refrigerants

Category: Technologie

written by www.mbsm.pro | 4 May 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

HFC refrigerant (hydrofluorocarbons) is the third generation of fluorinated refrigerants. Recognized as Ozone Depleting Potential (ODP) and Global Warming Potential (GWP), they represent a greener alternative to CFC and HCFC. Refrigerants in this group are applicable to refrigeration plants and air conditioning units designed specifically for their use. In addition, they can serve as drop-in replacements for older CFCs and HCFCs. The HFC group includes the following products:

R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON M059)
R422A (ISCEON M079)
R422D (ISCEON M029)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON M049Plus)
R438A (ISCEON M099)
R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON M089
R1234yf

مركبات الهيدروفلوروكربون) هي الجيل الثالث من المبردات المفلورة (HFC (GWP) وإمكانية الاحترار العالمي (ODP) معترف بها على أنها إمكانات استنفاد الأوزون . فهي تمثل بديلاً أكثر خضرة لمركبات الكربون الكلورية فلورية ومركبات الكربون الهيدروكلورية فلورية. تنطبق المبردات في هذه المجموعة على محطات التبريد ووحدات تكييف الهواء المصممة خصيصاً لاستخدامها. بالإضافة إلى ذلك ، يمكن أن تكون بمثابة بدائل منسدة لمركبات الكربون الكلورية فلورية ومركبات الكربون الهيدروكلورية فلورية القديمة.

:المنتجات التالية HFC تتضمن مجموعة

R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON M059)
R422A (ISCEON M079)
R422D (ISCEON M029)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON M049Plus)
R438A (ISCEON M099)

R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON M089
R1234yf

Le réfrigérant HFC (hydrofluorocarbures) est la troisième génération de réfrigérants fluorés. Reconnus comme potentiel d'appauvrissement de la couche d'ozone (ODP) et potentiel de réchauffement planétaire (GWP), ils représentent une alternative plus verte au CFC et au HCFC. Les réfrigérants de ce groupe sont applicables aux installations de réfrigération et aux unités de climatisation conçues spécifiquement pour leur utilisation. De plus, ils peuvent servir de remplacements directs pour les CFC et HCFC plus anciens.

Le groupe HFC comprend les produits suivants:

R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON M059)
R422A (ISCEON M079)
R422D (ISCEON M029)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON M049Plus)
R438A (ISCEON M099)
R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON M089
R1234yf






PictureS Mbsm Dot Pro | www.mbsm.pro

Compresseurs Embraco, , EMU70HLC ,
R134a, 220 V, 50Hz, 1/5 HP, 149 watts
, 180 mL

Category: Technologie, Tester ok
written by www.mbsm.pro | 4 May 2020

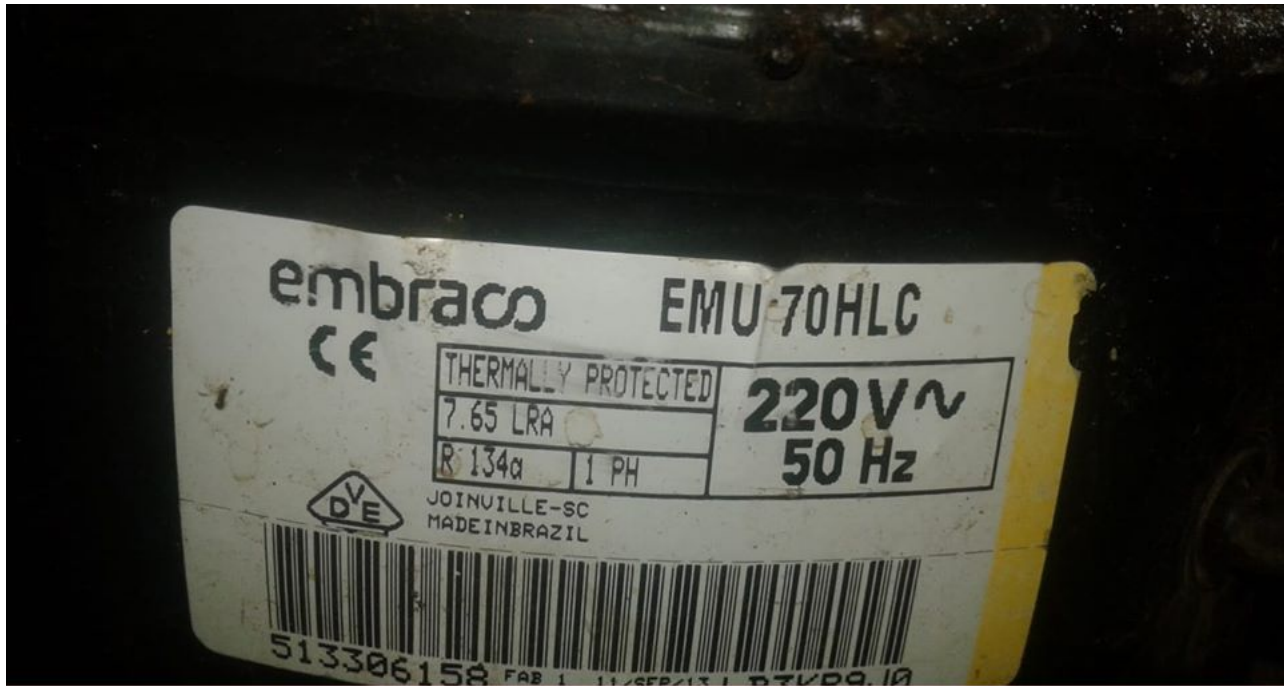

PictureS Mbsm Dot Pro : www.mbsm.pro

Compresseurs Embraco, ,EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 0.17 kW (0.2214 BHP) ,180 mL

Tableau de conversion d'unités

Category: Technologie

written by www.mbsm.pro | 4 May 2020

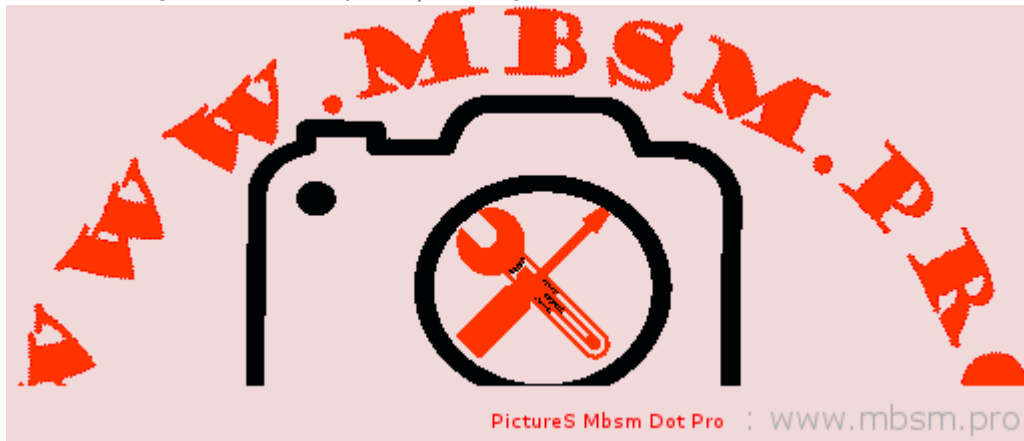


Tableau de conversion d'unités

QD110H , Chest Freezer Compressor ,1/3HP ,220V/50Hz ,R134A

Category: Technologie,Tester ok

written by www.mbsm.pro | 4 May 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

1/3HP Refrigeration Compressor 220V/50Hz R134A
AC Compressor: R134A Hermetic LBP Piston Reciprocating Compressor
Model: WQ110H
Power Supply: 220-240/50-60V/Hz
Displacement: 11CC
Nominal Power: 1/3HP
Rated Power: 233W

Cooling Capacity: 280W
COP: 1.20W/W
Motor Type: RSIR
Starting relay: Starting Relay/PTC
Starting Capacitor: / μ F
Running Capacitor: / μ F
Cooling Type: F
Application: LBP
Certificate: 3C
1X20'FCL: 1600PCS



MAL QD110H_{HM}



220-240V~50Hz 1PH

L/MBP HST R134a

No.20010003548 COOLING CAPACITY:420W



www.comptek.com.cn



A003602

الإسكندرية لعلفم عمارة التبريد

Application:

LBP: Low back pressure; Refrigerator, Freezer, Wine cooler

MBP: Medium Back Pressure; Air-conditioner, vending machine

HBP: High Back Pressure: Air-conditioner, ice maker

LBP ASHRAE Test Condition:

Evaporation Temperature: -23.3 °C

Condensing Temperature: 54.4 °C

Subcooling Temperature: 32.2 °C

Ambient Temperature: 32.2 °C

MBP ASHRAE Test condition:

Evaporation Temperature: -5 °C

Condensing Temperature: 54.4 °C

Ambient Temperature: 35 °C

Subcooling Temperature: 46.1

Suction Temperature: 35 °C

HBP ASHRAE Test condition:

Evaporation Temperature: 7.2°C

Condensing Temperature: 54.4°C

Ambient Temperature: 35°C

Subcooling Temperature: 46.1°C

Suction Temperature: 35°C

Parameter Variation Range:

Cooling Capacity: ≥ 95%

Input Power: ≤ 115%

Current: ≤ 110%

COP: ≥ 95%

Cooling Type:

S: Natural cooling

F1: Fan cooling, 200mm fan diameter, 1.5m/s air speed

F2: Fan cooling, 200mm fan diameter, 3m/s air speed

جدول بأنواع الزيوت ,
المناسبة لوسائط وضواغط التبريد و
اللدوجة المناسبة لكل نوع من الضواغط
table of the types of oils suitable
for the appropriate refrigeration and
liquefied media and compressors for
each type of compressor

Category: Arabe,Solutions,Technologie,Tester ok

written by www.mbsm.pro | 4 May 2020

جدول بأنواع الزيوت المناسبة لوسائط وضواغط التبريد حسب اللزوجة

A	B	C	D	E	F	G	H	I	J	K	L
وسيط التبريد		Ramçoo	درجة حرارة البخار		ISO VG الزيت بجانبه قيمة اللزوجة						
ASHRAE تسمية	الصفة	الخطأ	من (°C)	إلى (°C)	Piston	بستوني	Scrws	سكرو	سكرو	سكرو	طرد مركزي
R12	CFC		-40	40+	MN 32			MN 68	PAO 400		MN 68
R502	CFC		-50	20-	MN 32	AB 32		MN 68	AB 100		MN 68
R22	HCFC		-25	10+	MN 32	AB 32	PAO 68	MN 68	AB 100		MN 68
R22	HCFC		-30	10+		AB 32	PAO 68		AB 100		MN 68
R22	HCFC		-40	10+		AB 32			AB 100		MN 68
R22	HCFC		-50	10+		AB 32			AB 68		
R123	HCFC	R11	0	20+							
R124	HCFC	R114	0	80+	MN 68			AB 100			
R401a	HCFC	R12	-20	10+	MN 32	AB 32					
R402a	HCFC	R502	-50	30-	AB 32						
R408a	HCFC	R502	-50	30-	AB 32			AB 100			
R409a	HCFC	R12	-20	10+	MN 32	AB 32					
R290	C3H8(propane)		-30	20+	MN 68			PG 150			PG 150
R600/R600a	Butane /Iso But		-30	20+	MN 68			PG 150			PG 150
R717	NH3(ammonia)		-30	10+	MN 68	AB 32	PAO/AB 68	MN 68	PAO 68	PAO/AB 68	MN 68
R717	NH3(ammonia)		-50	10+		AB 32	PAO/AB 68		PAO 68	PAO/AB 68	MN 68
R744	CO2		-55	10-							
R23	HFC		-100	40-	POE 22						
R134a	HFC	R12	-20	10+	POE 22			POE 220			POE 68
R134a	HFC	R12	-30	10+	POE 22			POE100			POE 68
R404a	HFC	R502	-40	30-	POE 22			POE 220			POE 68
R404a	HFC	R502	-50	30-	POE 22			POE100			POE 68
R407C	HFC	R22	0	10+	POE 68			POE 220			
R410a	HFC		-45	10+	POE 22			POE100			POE 68
R410a	HFC		-25	10+	POE 32			POE 220			POE 68
R410b	HFC		-25	10+	POE 22			POE 220			POE 68
R417a	HFC	R22	-15	15+	POE 68			POE 220			POE 68
R422a	HFC	R22	-45	5-	POE 22			POE100			POE 68
R422a	HFC	R22	-25	5-	POE 32			POE 220			POE 68
R422d	HFC	R22	-45	10+	POE 22			POE100			POE 68
R422d	HFC	R22	-25	10+	POE 32			POE 220			POE 68
R427a	HFC	R22	-40	10+	POE 22			POE100			POE 68
R427a	HFC	R22	-20	10+	PAO 400			POE 220			POE 68
R507/507a	HFC		-40	0	POE 22			POE100			POE 68

PictureS Mbsm Dot Pro : www.mbsm.pro

Table of oil types suitable for appropriate refrigeration and liquefied media and compressors for each type of compressor

PAO (Polyalphaolefin) Polyamphalene oil

MN (Mineral Naphthenic) Oil

AB (Alkylbenzene) Petrol oil

POE (Polyol Ester) Polyethylene oil

PG (Polyglycol) Polyglycol

www.mbsm.pro , Cold ,refrigeration ,compressor 1/4 hp, QD76HG ,HM Series , R134a ,HBP

Category: Solutions,Tester ok

written by www.mbsm.pro | 4 May 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

www.mbsm.pro , Cold ,refrigeration ,compressor 1/4 hp, QD76HG ,HM Series , R134a