


LG, air, conditioning, compressor, catalog, Rotary

Category: compressor

written by www.mbsm.pro | 22 December 2020

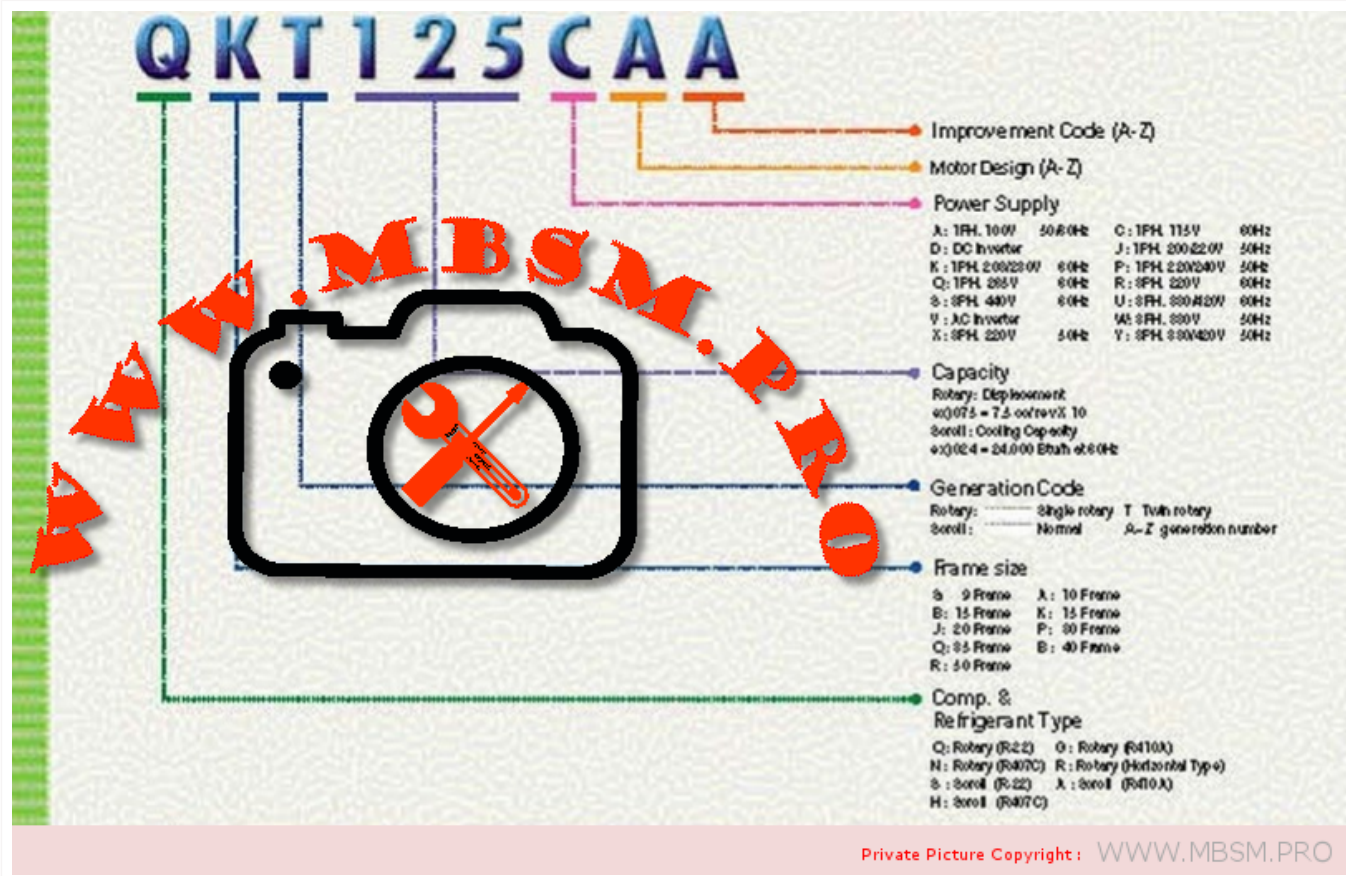

Serial Number Code

29E01234-A-1MJ17-A00001

Manufacturing Serial No.

Manufacturing Line No.

Manufacturing Date

Manufacturing Month
(Jan. : A, Feb. : B ...)

Manufacturing Year
(A : 1990, B : 1991 ...)

Manufacturing Lot No.

Assembly Line

Order No.

Destination
(D : Domestic, E : Export)

Serial Number Making Month

Serial Number Making Year
(It repeats every 10 years)

	Model	Power Source	Flow		Motor Input		EER		COP		Discharge	Weight	A	B	C		
			(Btu/hr)	(Watts)	(Watts)		(Btu/W.hr)		(W/W)		(cc)	(Kg)					
60Hz	QA050C	1PH, 115V - 60Hz	3400	996	366		9.3		2.73		230	6.2	191.4	148	186.9		
	QA064C	1PH, 115V - 60Hz	4450	1304	473		9.4		2.76		230	6.2	191.4	148	186.9		
	QA075C	1PH, 115V - 60Hz	5250	1538	477		10.9		3.19		230	8.3	215.4	181	219.9		
	QA084C	1PH, 115V - 60Hz	6000	1758	545		11.0		3.23		230	8.3	215.4	181	219.9		
	QA090C	1PH, 115V - 60Hz	6240	1829	578		10.8		3.16		230	8.3	215.4	181	219.9		
	QA096C	1PH, 115V - 60Hz	6650	1949	615		10.8		3.17		230	8.5	215.4	181	219.9		
	QA104C	1PH, 115V - 60Hz	7235	2120	676		10.7		3.14		290	8.5	230.0	198	243.9		
	QA110C	1PH, 115V - 60Hz	7550	2212	712		10.6		3.11		290	8.7	230.0	198	243.9		
	QA114C	1PH, 115V - 60Hz	7950	2330	736		10.8		3.17		290	8.7	230.0	198	243.9		
	QA075K	1PH, 208/230V - 60Hz	5200	1524	486		10.7		3.14		230	8.3	215.4	181	219.9		
	QA084K	1PH, 208/230V - 60Hz	5760	1688	549		10.5		3.08		230	8.3	215.4	181	219.9		
	QA096K	1PH, 208/230V - 60Hz	6700	1963	615		10.9		3.19		230	8.3	215.4	181	219.9		
	QA104K	1PH, 208/230V - 60Hz	7150	2095	662		10.8		3.17		290	8.5	230.0	198	243.9		
	QA110K	1PH, 208/230V - 60Hz	7610	2230	718		10.6		3.11		290	8.7	230.0	198	243.9		
	QA114K	1PH, 208/230V - 60Hz	7890	2312	744		10.6		3.11		290	8.7	230.0	198	243.9		
QA096Q	1PH, 265V - 60Hz	6600	1934	617		10.7		3.13		230	8.3	215.4	181	219.9			
QA104Q	1PH, 265V - 60Hz	7150	2095	662		10.8		3.17		290	8.9	230.0	198	243.9			
50Hz	QA096P	1PH, 220/240V - 50Hz	5470	5530	1603	1621	516	537	10.6	10.3	3.17	3.02	230	7.6	215.4	181	219.9
	QA104P	1PH, 220/240V - 50Hz	5890	5930	1726	1738	566	587	10.4	10.1	3.05	2.96	290	8.7	230.0	198	239.9
	QA114P	1PH, 220/240V - 50Hz	6470	6550	1896	1919	630	649	10.3	10.1	3.00	2.96	290	8.7	230.0	198	239.9
50Hz 60Hz	QA096A	1PH, 100V - 50/60Hz	5500	6600	1612	1934	550	640	10.0	10.3	2.93	3.02	230	8.0	215.4	181	219.9
	QA104A	1PH, 100V - 50/60Hz	5900	7050	1729	2066	608	698	9.7	10.1	2.84	2.96	290	8.3	230.0	198	243.9

	Model	Power Source	Cooling Capacity		Motor Input (Watts)		EER (Btu/W.hr)		COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)							
			(Btu/hr)	(Watts)								A	B	C	D	E			
60Hz	QK125C	1PH, 115V - 60Hz	8790	2576	814	10.8	3.16	280	11.5	224.3	200	38.6	50.8	93					
	QK134C	1PH, 115V - 60Hz	9400	2756	854	11.0	3.22	280	11.5	232.0	200	38.6	50.8	93					
	QK141C	1PH, 115V - 60Hz	9900	2901	900	11.0	3.22	280	11.5	224.0	200	38.6	50.8	93					
	QK145C	1PH, 115V - 60Hz	10200	2989	927	11.0	3.22	280	12.1	232.0	200	38.6	50.8	93					
	QK156C	1PH, 115V - 60Hz	11000	3223	1048	10.5	3.08	280	11.5	224.0	200	38.6	50.8	93					
	QK164C	1PH, 115V - 60Hz	11600	3399	1055	11.0	3.22	280	12.1	224.0	200	38.6	50.8	93					
	QK173C	1PH, 115V - 60Hz	12300	3604	1153	10.7	3.13	350	12.3	240.3	220	43.6	65.0	103					
	QK178C	1PH, 115V - 60Hz	12500	3663	1157	10.8	3.17	350	12.3	240.3	220	43.6	65.0	103					
	QK185C	1PH, 115V - 60Hz	13100	3839	1224	10.7	3.14	350	12.3	240.3	220	43.6	65.0	103					
	QK191C	1PH, 115V - 60Hz	13600	3985	1259	10.8	3.17	350	12.3	240.3	220	43.6	65.0	103					
	QK196C	1PH, 115V - 60Hz	13900	4073	1287	10.8	3.16	380	13.2	236.9	220	45.9	65.0	103					
	QK208C	1PH, 115V - 60Hz	15000	4396	1415	10.6	3.11	380	13.2	236.9	220	45.9	65.0	103					
	QK125K	1PH, 208/230V - 60Hz	8700	2549	805	10.8	3.17	280	11.5	224.0	200	38.6	50.8	93					
	QK134K	1PH, 208/230V - 60Hz	9350	2740	874	10.7	3.13	280	11.5	224.0	200	38.6	50.8	93					
	QK141K	1PH, 208/230V - 60Hz	9800	2872	907	10.8	3.17	280	11.5	224.0	200	38.6	50.8	93					
	QK145K	1PH, 208/230V - 60Hz	10100	2960	935	10.8	3.17	280	11.5	224.0	200	38.6	50.8	93					
	QK156K	1PH, 208/230V - 60Hz	11100	3223	1028	10.7	3.14	280	11.5	224.0	200	38.6	50.8	93					
	QK164K	1PH, 208/230V - 60Hz	11500	3370	1045	11.0	3.22	280	12.1	224.0	200	38.6	50.8	93					
	QK173K	1PH, 208/230V - 60Hz	12100	3546	1141	10.6	3.11	350	12.3	240.3	220	43.6	65.0	103					
	QK178K	1PH, 208/230V - 60Hz	12500	3663	1179	10.6	3.11	350	12.3	240.3	220	43.6	65.0	103					
	QK185K	1PH, 208/230V - 60Hz	13000	3810	1215	10.7	3.14	350	11.6	240.3	220	43.6	65.0	103					
	QK191K	1PH, 208/230V - 60Hz	13400	3927	1252	10.7	3.14	350	12.3	240.3	220	43.6	65.0	103					
	QK196K	1PH, 208/230V - 60Hz	13900	4073	1287	10.8	3.16	380	13.2	236.9	220	45.9	65.0	103					
	QK208K	1PH, 208/230V - 60Hz	14800	4337	1383	10.7	3.14	380	13.2	236.9	220	45.9	65.0	103					
	QK222K	1PH, 208/230V - 60Hz	15900	4659	1458	10.9	3.20	380	13.2	236.9	220	45.9	65.0	103					
	QK125Q	1PH, 265V - 60Hz	8650	2535	801	10.8	3.16	280	11.3	221.3	220	38.6	50.8	93					
	QK141Q	1PH, 265V - 60Hz	9800	2872	907	10.8	3.17	280	11.5	224.3	220	38.6	50.8	93					
	QK164Q	1PH, 265V - 60Hz	11500	3370	1075	10.7	3.13	280	11.5	224.3	220	38.6	50.8	93					
	QK173Q	1PH, 265V - 60Hz	12100	3546	1142	10.6	3.11	350	11.6	232.3	220	43.6	50.8	93					
50Hz	QK125P	1PH, 220/240V - 50Hz	7100	7150	2081	2095	670	687	10.6	10.4	3.11	3.07	280	11.3	221.3	200	38.6	50.8	93
	QK134P	1PH, 220/240V - 50Hz	7550	7650	2213	2242	719	742	10.5	10.3	3.08	3.02	280	11.5	224.3	200	38.6	50.8	93
	QK141P	1PH, 220/240V - 50Hz	8050	8150	2359	2388	770	795	10.5	10.3	3.08	3.02	280	11.5	224.3	200	38.6	50.8	93
	QK145P	1PH, 220/240V - 50Hz	8250	8300	2418	2432	778	798	10.6	10.4	3.10	3.05	280	11.5	224.3	200	38.6	50.8	93
	QK164P	1PH, 220/240V - 50Hz	9300	9400	2725	2755	877	895	10.6	10.5	3.11	3.08	280	11.5	224.3	200	38.6	65.0	103
	QK173P	1PH, 220/240V - 50Hz	9800	9900	2872	2901	933	952	10.5	10.4	3.08	3.05	350	11.7	232.3	220	43.6	65.0	103 _A
	QK185P	1PH, 220/240V - 50Hz	10500	10650	3077	3121	1000	1029	10.5	10.3	3.08	3.03	350	11.7	232.3	220	43.6	65.0	103 _A
	QK191P	1PH, 220/240V - 50Hz	11150	11250	3267	3297	1062	1082	10.5	10.4	3.08	3.05	350	11.7	232.3	220	43.6	65.0	103
	QK208P	1PH, 220/240V - 50Hz	11800	12000	3458	3516	1103	1143	10.7	10.5	3.14	3.08	380	13.2	236.9	220	45.9	65.0	103
QK222P	1PH, 220/240V - 50Hz	12800	12900	3751	3780	1219	1265	10.5	10.2	3.08	2.99	380	13.2	236.9	220	45.9	65.0	103	

Private Picture Copyright : WWW.MBSM.PRO

Specifications

60Hz

Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)	(Watts)						A	B	C	D	E
QJ189C	1PH, 115V - 60Hz	13350	3912	1248	10.7	3.13	410	15.2	254.6	220	37.2	65	109
QJ196K	1PH, 208/230V - 60Hz	13900	4073	1275	10.9	3.19	410	15.2	244.6	220	37.2	65	109
QJ208K	1PH, 208/230V - 60Hz	14650	4293	1356	10.8	3.17	410	15.2	244.6	220	37.2	65	109
QJ222K	1PH, 208/230V - 60Hz	15700	4601	1440	10.9	3.19	410	15.2	244.6	220	37.2	65	109
QJ230K	1PH, 208/230V - 60Hz	16300	4777	1495	10.9	3.20	410	15.2	244.6	220	37.2	65	109
QJ250K	1PH, 208/230V - 60Hz	17600	5158	1630	10.8	3.16	410	15.2	251.3	229	38.3	75	113
QJ258K	1PH, 208/230V - 60Hz	18000	5275	1667	10.8	3.16	410	15.2	251.3	229	38.3	75	113
QJ264K	1PH, 208/230V - 60Hz	18650	5465	1710	10.9	3.20	410	15.2	251.3	229	38.3	75	113
QJ278K	1PH, 208/230V - 60Hz	19600	5744	1815	10.8	3.16	500	15.2	256.3	229	43.3	75	113
QJ282K	1PH, 208/230V - 60Hz	19850	5817	1838	10.8	3.16	500	15.2	256.3	229	43.3	75	113
QJ306K	1PH, 208/230V - 60Hz	22200	6505	2094	10.6	3.11	500	16.6	278.3	250	42.2	75	113
QJ325K	1PH, 208/230V - 60Hz	23100	6769	2200	10.5	3.08	500	16.6	278.3	250	42.2	75	113
QJ348K	1PH, 208/230V - 60Hz	24650	7223	2370	10.4	3.05	500	16.6	278.3	250	42.2	75	113
QJ222Q	1PH, 265V - 60Hz	15800	4630	1463	10.8	3.16	410	15.2	251.3	220	37.2	65	109

Private Picture Copyright : WWW.MBSM.PRO

Specifications

50Hz

Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)	(Watts)						A	B	C	D	E
QJ208P	1PH, 220/240V - 50Hz	11800	3458	1092	10.8	3.17	410	15.2	254.6	220	37.2	65	109
QJ222J	1PH, 200/220V - 50Hz	12700	3722	1176	10.8	3.16	410	15.2	254.6	220	37.2	65	109
QJ222P	1PH, 220/240V - 50Hz	12900	3780	1183	10.9	3.20	410	15.2	254.6	220	37.2	65	109
QJ264J	1PH, 200/220V - 50Hz	15300	4484	1485	10.3	3.02	410	15.2	261.3	220	38.3	65	109
QJ264P	1PH, 220/240V - 50Hz	15200	4454	1407	10.8	3.17	410	15.2	261.3	220	38.3	65	109
QJ282P	1PH, 220/240V - 50Hz	16250	4762	1519	10.7	3.13	500	15.2	266.3	229	43.3	75	113
QJ292J	1PH, 200/220V - 50Hz	16800	4923	1555	10.8	3.17	500	15.2	266.3	229	43.3	75	113
QJ292P	1PH, 220/240V - 50Hz	16700	4894	1575	10.6	3.11	500	15.2	266.3	229	43.3	75	113
QJ325P	1PH, 220/240V - 50Hz	19000	5568	1792	10.6	3.11	500	16.6	278.3	250	42.2	75	113

Private Picture Copyright : WWW.MBSM.PRO

Specifications

60Hz

Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)	(Watts)						A	B	C	D	E
QP306KB	1PH, 208/230V - 60Hz	22600	6623	2055	11.0	3.22	700	22.0	147.5	317	75	312.3	123.4
QP325KB	1PH, 208/230V - 60Hz	24000	7033	2162	11.1	3.25	700	22.0	147.5	328	75	312.3	123.4
QP348KB	1PH, 208/230V - 60Hz	26000	7619	2312	11.2	3.28	700	22.0	147.5	328	75	312.3	123.4
QP362KD	1PH, 208/230V - 60Hz	26300	2481	2481	10.6	3.11	700	22.0	147.5	302	75	312.3	123.4
QP376KA	1PH, 208/230V - 60Hz	27700	8117	2541	10.9	3.19	700	24.0	147.5	328	75	345.3	123.4
QP390KB	1PH, 208/230V - 60Hz	28700	8410	2707	10.6	3.11	700	24.0	147.5	317	75	345.3	123.4
QP407KB	1PH, 208/230V - 60Hz	30100	8821	2736	11.0	3.22	700	24.0	147.5	328	75	345.3	123.4
QP425KA	1PH, 208/230V - 60Hz	31900	9348	2927	10.9	3.19	700	24.0	147.5	328	75	345.3	123.4

Specifications

50Hz

Model	Power Source	Cooling Capacity				Motor Input (Watts)		EER (Btu/W·hr)		COP (W/W)		Oil Charge (cc)	Weight (kg)	Dimension (mm)				
		(Btu/hr)		(Watts)										A	B	C	D	E
QP325PB	1PH, 220/240V - 50Hz	19200	19300	5626	5656	1778	1856	10.8	10.4	3.16	3.05	700	22.0	147.5	328	75	312.3	123.4
QP348PD	1PH, 220/240V - 50Hz	20800	21000	6095	6154	1926	2019	10.8	10.4	3.16	3.05	700	22.0	147.5	328	75	312.3	123.4
QP376PB	1PH, 220/240V - 50Hz	22500	22600	6593	6623	2143	2283	10.5	9.9	3.08	2.90	700	24.0	147.5	328	75	345.3	123.4
QP390PA	1PH, 220/240V - 50Hz	23000	23200	6740	6799	2130	2188	10.8	10.6	3.16	3.11	700	24.0	147.5	328	75	345.3	123.4
QP407PD	1PH, 220/240V - 50Hz	24050	24300	7048	7121	2227	2314	10.8	10.5	3.16	3.08	700	24.0	147.5	328	75	345.3	123.4
QP442PA	1PH, 220/240V - 50Hz	26000	26100	7619	7648	2430	2534	10.7	10.3	3.14	3.02	700	24.0	147.5	328	75	345.3	123.4

Private Picture Copyright : WWW.MBSM.PRO

Specifications

60Hz

Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)	(Watts)						A	B	C	D	E
QK173KB	1PH, 208/230V - 60Hz	12400	3634	1205	10.3	3.02	350	12.3	118.3	240.3	65	265.9	103.0
QJ250KE	1PH, 208/230V - 60Hz	17800	5216	1703	10.4	3.05	500	15.2	127.7	299.3	75	272.3	113.0
QJ258KB	1PH, 208/230V - 60Hz	18400	5392	1736	10.6	3.11	500	15.2	127.7	299.3	75	272.3	113.0
QJ278KC	1PH, 208/230V - 60Hz	19600	5744	1867	10.5	3.08	500	15.6	127.7	299.3	75	272.3	113.0
QJ282KB	1PH, 208/230V - 60Hz	20100	5890	1897	10.6	3.11	500	15.6	127.7	299.3	75	272.3	113.0
QP306KC	1PH, 208/230V - 60Hz	22600	6623	2055	10.5	3.08	700	22.0	147.5	317.0	75	312.3	123.4
QP325KC	1PH, 208/230V - 60Hz	23700	6945	2257	10.5	3.08	700	22.0	147.5	317.0	75	312.3	123.4
QP348KC	1PH, 208/230V - 60Hz	25700	7531	2424	10.6	3.11	700	22.0	147.5	317.0	75	312.3	123.4
QP362KB	1PH, 208/230V - 60Hz	27000	7912	2571	10.5	3.08	700	22.0	147.5	317.0	75	312.3	123.4
QP390KB	1PH, 208/230V - 60Hz	28700	8410	2707	10.6	3.11	700	24.0	147.5	317.0	75	345.3	123.4
QP425KB	1PH, 208/230V - 60Hz	31500	9231	2944	10.7	3.14	700	24.0	147.5	328.0	75	345.3	123.4

Specifications

50Hz

Model	Power Source	Cooling Capacity				Motor Input (Watts)		EER (Btu/W·hr)		COP (W/W)		Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)		(Watts)										A	B	C	D	E
QK125PB	1PH, 220/240V - 50Hz	7150	7200	2095	2110	681	727	10.50	9.90	3.08	2.90	280	11.3	118.3	266.3	50.8	238.6	93.0
QK208PC	1PH, 220/240V - 50Hz	12100	12200	3546	3575	1163	1245	10.40	9.80	3.05	2.87	380	13.2	118.3	281.9	65.0	265.9	103.0
QJ264PB	1PH, 220/240V - 50Hz	15400	15500	4513	4542	1457	1529	10.57	10.14	3.10	2.97	450	15.2	127.7	294.0	75.0	267.0	113.0
QP325PB	1PH, 220/240V - 50Hz	19200	19300	5626	5656	1778	1856	10.80	10.40	3.16	3.05	700	22.0	147.5	328.0	75.0	312.3	123.4
QP325PC	1PH, 220/240V - 50Hz	19350	19400	5670	5685	1878	2000	10.30	9.70	3.02	2.84	700	22.0	147.5	317.0	75.0	312.3	123.4
QP348PB	1PH, 220/240V - 50Hz	20500	20600	6007	6037	1884	1967	10.90	10.50	3.19	3.08	700	22.0	147.5	328.0	75.0	312.3	123.4
QP376PB	1PH, 220/240V - 50Hz	22500	22600	6593	6623	2143	2282	10.50	9.90	3.08	2.90	700	24.0	147.5	328.0	75.0	345.3	123.4
QP407PA	1PH, 220/240V - 50Hz	24100	24200	7062	7092	2317	2420	10.40	10.00	3.05	2.93	700	24.0	147.5	328.0	75.0	345.3	123.4
QP442PB	1PH, 220/240V - 50Hz	26000	26200	7619	7678	2549	2758	10.20	9.50	2.99	2.78	700	24.0	147.5	328.0	75.0	345.3	123.4
QP464PA	1PH, 220/240V - 50Hz	27600	27700	8088	8117	2654	2885	10.40	9.60	3.05	2.81	700	24.0	147.5	328.0	75.0	345.0	123.4

Private Picture Copyright : WWW.MBSM.PRO

QKT Series

	Model	Power Source	Cooling Capacity		Motor Input (Watt)		EER (Btu/W.hr)		COP (W/W)		Oil Charge (cc)	Weight (kg)	Dimension (mm)						
			(Btu/hr)	(Watt)									A	B	C	D	E		
R22	QKT164C	1PH, 115V - 60Hz	11400	3341	1065		10.7		3.14		410	13.6	250.5	245	34.8	65	103		
	QKT173C	1PH, 115V - 60Hz	12200	3575	1153		10.6		3.10		410	13.8	250.5	245	34.8	65	103		
	QKT191C	1PH, 115V - 60Hz	13500	3956	1259		10.7		3.14		410	13.8	250.5	245	34.8	65	103		
	QKT208C	1PH, 115V - 60Hz	14900	4366	1415		10.5		3.09		410	14.7	250.5	245	34.8	65	103		
	QKT164K	1PH, 208/230V - 60Hz	11400	3341	1045		10.9		3.20		410	13.6	250.5	245	34.8	65	103		
	QKT173K	1PH, 208/230V - 60Hz	12000	3516	1141		10.5		3.08		410	13.8	250.5	245	34.8	65	103		
	QKT191K	1PH, 208/230V - 60Hz	13300	3897	125		10.6		3.11		410	13.8	250.5	245	34.8	65	103		
	QKT208K	1PH, 208/230V - 60Hz	14700	4308	1370		10.7		3.14		410	14.7	250.5	245	34.8	65	103		
	QKT222K	1PH, 208/230V - 60Hz	15800	4630	1458		10.8		3.18		410	14.7	250.5	245	34.8	65	103		
	QKT164P	1PH, 220/240V - 50Hz	9200	9300	2695	2725	877	895	10.5	10.4	3.07	3.04	410	13.0	250.5	245	34.8	65	103
	QKT173P	1PH, 220/240V - 50Hz	9700	9800	2842	2872	933	952	10.4	10.3	3.08	3.05	410	13.8	250.5	245	34.8	65	103
	QKT191P	1PH, 220/240V - 50Hz	11050	11150	3238	3267	1062	1082	10.4	10.3	3.05	3.02	410	13.2	250.5	245	34.8	65	103
	QKT208P	1PH, 220/240V - 50Hz	11700	11900	3429	3487	1103	1143	10.6	10.4	3.11	3.05	410	14.7	250.5	245	34.8	65	103
	QKT222P	1PH, 220/240V - 50Hz	12700	12800	3722	3751	1219	1265	10.4	10.1	3.05	2.97	410	14.7	250.5	245	34.8	65	103
R407C	NKT164P	1PH, 220/240V - 50Hz	9600	9700	2813	2842	923	942	10.4	10.3	3.05	3.02	410	13.7	250.5	245	34.8	65	103
	NKT185P	1PH, 220/240V - 50Hz	10760	10930	3153	3203	1050	1075	10.2	10.2	3.00	2.98	410	13.7	250.5	245	34.8	65	103
R410A	GKT102P	1PH, 220/240V - 50Hz	8050	8150	2359	2388	841	870	9.6	9.4	2.80	2.75	410	13.3	250.5	245	34.8	65	103
	GKT113P	1PH, 220/240V - 50Hz	8700	8800	2549	2579	905	938	9.6	9.4	2.82	2.75	410	13.3	250.5	245	34.8	65	103
	GKT120P	1PH, 220/240V - 50Hz	9500	9600	2784	2813	1000	1032	9.5	9.3	2.78	2.73	410	13.7	250.5	245	34.8	65	103
	GKT134P	1PH, 220/240V - 50Hz	10550	10650	3092	3121	1111	1145	9.5	9.3	2.78	2.73	410	13.7	250.5	245	34.8	65	103
	GKT141P	1PH, 220/240V - 50Hz	11150	11300	3267	3311	1174	1215	9.5	9.3	2.78	2.73	410	13.7	250.5	245	34.8	65	103

QJT Series

	Model	Power Source	Cooling Capacity				Motor Input (Watts)		EER (Btu/W.hr)		COP (W/W)		Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
			(Btu/hr)		(Watts)										A	B	C	D	E
R22	QJT250K	1PH, 208/230V - 60Hz	17600		5158		1630		10.8		3.16		550	17.0	287	229	40.8	75	127.7
	QJT264K	1PH, 208/230V - 60Hz	18650		5465		1710		10.9		3.20		550	17.0	287	229	40.8	75	127.7
	QJT282K	1PH, 208/230V - 60Hz	19700		5773		1876		10.5		3.08		550	17.0	287	229	40.8	75	127.7
	QJT264P	1PH, 220/240V - 50Hz	15200		4454		1407		10.8		3.17		550	17.0	287	229	40.8	75	127.7
	QJT282P	1PH, 220/240V - 50Hz	16250		4762		1519		10.7		3.13		550	17.0	287	229	40.8	75	127.7
R410A	GJT208P	1PH, 220/240V - 50Hz	17300	17500	5070	5128	1784	1842	9.7	9.5	2.84	2.78	550	17.0	287	229	40.8	75	127.7
	GJT230P	1PH, 220/240V - 50Hz	19100	19300	5597	5656	1969	2032	9.7	9.5	2.84	2.78	550	17.0	287	229	40.8	75	127.7
	GJT250P	1PH, 220/240V - 50Hz	20700	21000	6066	6154	2134	2211	9.7	9.5	2.84	2.78	550	17.0	287	229	40.8	75	127.7
R407C	NJT264P	1PH, 220/240V - 50Hz	16150	16300	4733	4777	1495	1552	10.8	10.5	3.16	3.08	550	17.0	287	229	40.8	75	127.7
	NJT282P	1PH, 220/240V - 50Hz	16800	17000	4923	4982	1600	1650	10.5	10.3	3.08	3.02	550	17.0	287	229	40.8	75	127.7

QPT Series

	Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
			(Btu/hr)	(Watts)						A	B	C	D	E
R22	QPT330K	1PH, 208/230V - 60Hz	24400	7150	2259	10.8	3.16	800/1200	23.4/23.8	315.9/344.2	340.5	45.6/73.9	90	147
	QPT407K	1PH, 208/230V - 60Hz	30100	8821	2736	11.0	3.22	800/1200	24.2/24.6	326.9/355.2	340.5	45.6/73.9	90	147
	QPT425K	1PH, 208/230V - 60Hz	31500	9231	2864	11.0	3.22	800/1200	24.2/24.6	326.9/355.2	340.5	45.6/73.9	90	147
	QPT442K	1PH, 208/230V - 60Hz	32500	9524	2955	11.0	3.22	800/1200	24.2/24.6	326.9/355.2	340.5	45.6/73.9	90	147
	QPT525K	1PH, 208/230V - 60Hz	38700	11341	3583	10.8	3.16	800/1200	24.2/24.6	335.9/364.2	340.5	45.6/73.9	90	147
	QPT330U	3PH, 380V - 60Hz	24400	7150	2259	10.8	3.16	800/1200	24.0/24.4	324.9/353.2	340.5	45.6/73.9	90	147
	QPT442U	3PH, 380V - 60Hz	32500	9524	2955	11.0	3.22	800/1200	24.8/25.2	335.9/364.2	340.5	45.6/73.9	90	147
	QPT525U	3PH, 380V - 60Hz	38700	11341	3583	10.8	3.16	800/1200	24.8/25.2	335.9/364.2	340.5	45.6/73.9	90	147
	QPT442R	3PH, 220V - 60Hz	32500	9524	2955	11.0	3.22	800/1200	24.8/25.2	335.9/364.2	340.5	45.6/73.9	90	147
	QPT525R	3PH, 220V - 60Hz	38700	11341	3583	10.8	3.16	800/1200	24.8/25.2	335.9/364.2	340.5	45.6/73.9	90	147
	QPT330Y	3PH, 380/420V - 50Hz	19500	5714	1806	10.8	3.16	800/1200	24.0/24.4	324.9/353.2	340.5	45.6/73.9	90	147
	QPT425Y	3PH, 380/420V - 50Hz	25000	7326	2273	11.0	3.22	800/1200	24.8/25.2	335.9/364.2	340.5	45.6/73.9	90	147
	QPT488P	1PH, 220/240V - 60Hz	29000	8498	2685	10.8	3.16	800/1200	24.2/24.6	326.9/355.2	340.5	45.6/73.9	90	147
R410A	GPT330Y	3PH, 380/420V - 50Hz	27200	7971	2776	9.8	2.87	800/1200	24.8/25.2	335.9/364.2	340.5	45.6/73.9	90	147

Private Picture Copyright : WWW.MBSM.PRO

Specifications

50Hz

Model	Power Source	Cooling Capacity				Motor Input (Watts)		EER (Btu/W.hr)		COP (W/W)		Oil Charge (cc)	Weight (kg)	Dimension (mm)				
		(Btu/hr)		(Watts)										A	B	C	D	E
NK125P	1PH,220/240V-50Hz	7300	7400	2139	2168	709	726	10.3	10.2	3.02	2.99	350	11.8	274	50.8	220	263.6	93.0
NK134P	1PH,220/240V-50Hz	7900	8000	2315	2344	752	769	10.5	10.4	3.08	3.05	350	11.8	274	50.8	220	263.6	93.0
NK164P	1PH,220/240V-50Hz	9700	9800	2842	2872	923	942	10.5	10.4	3.08	3.05	350	12.2	282	50.8	220	263.6	93.0
NK185P	1PH,220/240V-50Hz	10860	11030	3182	3232	1050	1075	10.3	10.3	3.03	3.01	350	12.2	275	50.8	220	263.6	93.0
NJ208P	1PH,220/240V-50Hz	12400	12500	3634	3663	1181	1202	10.5	10.4	3.08	3.05	410	14.8	288	65.0	220	257.2	109.0
NJ236P	1PH,220/240V-50Hz	14200	14400	4161	4220	1340	1358	10.6	10.6	3.11	3.11	410	15.4	288	65.0	220	257.2	109.0
NJ264P	1PH,220/240V-50Hz	16150	16300	4733	4777	1495	1552	10.8	10.5	3.16	3.08	450	15.8	294	75.0	229	267.0	113.0
NJ282P	1PH,220/240V-50Hz	16800	17000	4923	4982	1600	1650	10.5	10.3	3.08	3.02	450	15.8	294	75.0	292	330.0	113.0
NP348P	1PH,220/240V-50Hz	21000	21100	6154	6183	2000	2069	10.5	10.2	3.08	2.99	700	20.9	295	75.0	292	345.3	123.4
NP362P	1PH,220/240V-50Hz	21900	22000	6418	6447	2086	2157	10.5	10.2	3.08	2.99	700	20.9	295	75.0	292	345.3	123.4
NP407P	1PH,220/240V-50Hz	25000	25200	7326	7385	2404	2545	10.4	9.9	3.05	2.90	700	21.4	295	90.0	328	381.0	132.5

Private Picture Copyright : WWW.MBSM.PRO

NORMAL

50Hz

Model	Power Source	Cooling Capacity				Motor Input		EER		COP		Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)	(Watts)			(Watts)		(Btu/W.hr)		(W/W)				A	B	C	D	E
GA066P	1PH, 220/240V - 50Hz	5270	5330	1544	1562	555	570	9.5	9.4	2.78	2.74	240	8.9	260	31.8	168	207	86.2
GA086P	1PH, 220/240V - 50Hz	6900	6950	2022	2037	734	781	9.4	8.9	2.75	2.61	290	8.9	267	50.8	200	246	93.0
GK080P	1PH, 220/240V - 50Hz	6550	6600	1919	1934	682	702	9.6	9.4	2.81	2.76	330	11.8	274	50.8	220	264	93.0
GK086P	1PH, 220/240V - 50Hz	6900	7000	2022	2051	726	736	9.5	9.5	2.79	2.79	330	11.8	274	50.8	220	264	93.0
GK094P	1PH, 220/240V - 50Hz	7700	7750	2256	2271	794	824	9.7	9.4	2.84	2.76	330	11.8	274	50.8	220	264	93.0
GK102P	1PH, 220/240V - 50Hz	8250	8350	2418	2447	841	870	9.8	9.6	2.87	2.81	330	11.8	274	65.0	220	264	109.0
GK113P	1PH, 220/240V - 50Hz	9000	9100	2637	2667	914	938	9.8	9.7	2.89	2.84	330	11.8	274	65.0	220	264	109.0
GK120P	1PH, 220/240V - 50Hz	9700	9800	2842	2872	1010	1043	9.6	9.4	2.81	2.75	350	12.2	274	65.0	220	264	109.0
GK134P	1PH, 220/240V - 50Hz	10750	10850	3150	3179	1132	1154	9.5	9.4	2.78	2.76	350	12.2	282	65.0	220	264	109.0
GK141P	1PH, 220/240V - 50Hz	11450	11600	3355	3399	1180	1221	9.7	9.5	2.84	2.78	350	12.2	282	65.0	220	264	109.0
GK151P	1PH, 220/240V - 50Hz	12200	12400	3575	3634	1245	1292	9.8	9.6	2.87	2.81	350	12.7	287	65.0	220	264	109.0
GJ160P	1PH, 220/240V - 50Hz	13150	13300	3853	3897	1328	1371	9.9	9.7	2.90	2.84	440	14.8	288	65.0	252	294	109.0
GJ176P	1PH, 220/240V - 50Hz	14400	14500	4220	4249	1485	1526	9.7	9.5	2.84	2.78	440	14.8	288	65.0	252	294	109.0
GJ189P	1PH, 220/240V - 50Hz	15500	15700	4542	4601	1581	1635	9.8	9.6	2.87	2.81	440	15.2	288	65.0	252	294	109.0
GJ208P	1PH, 220/240V - 50Hz	17500	17700	5128	5187	1750	1823	10.0	9.7	2.93	2.85	500	16.0	299	75.0	283	329	113.0
GJ222P	1PH, 220/240V - 50Hz	18500	18700	5421	5480	1867	1928	9.9	9.7	2.90	2.84	500	16.4	299	75.0	283	329	113.0
GJ230P	1PH, 220/240V - 50Hz	19100	19300	5597	5656	1949	2010	9.8	9.6	2.87	2.81	500	16.4	299	75.0	283	329	113.0
GP270P	1PH, 220/240V - 50Hz	23100	23400	6769	6857	2347	2392	9.9	9.7	2.88	2.87	700	22.0	295	75.0	292	345	123.4
GP280P	1PH, 220/240V - 50Hz	23700	23900	6945	7004	2370	2439	10.0	9.8	2.93	2.87	700	22.0	295	75.0	292	345	123.4
GP290P	1PH, 220/240V - 50Hz	24700	24900	7238	7297	2470	2541	10.0	9.8	2.93	2.87	700	23.0	320	90.0	328	381	132.5
GA072A	1PH, 100V - 50/60Hz	5850	7050	1714	2065	650	750	9.0	9.4	2.64	2.75	240	8.6	260	31.8	168	207	86.2

Specifications

60Hz

Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
		(Btu/hr)	(Watts)						A	B	C	D	E
RK125C	1PH, 115V - 60Hz	8790	2576	837	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK134C	1PH, 115V - 60Hz	9400	2755	895	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK141C	1PH, 115V - 60Hz	9900	2901	943	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK164C	1PH, 115V - 60Hz	11500	3370	1095	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK173C	1PH, 115V - 60Hz	12300	3604	1171	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5
RK178C	1PH, 115V - 60Hz	12500	3663	1190	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5
RK185C	1PH, 115V - 60Hz	13000	3810	1274	10.2	2.99	350	12.3	240	41.3	160.5	84.5	69.5
RK191C	1PH, 115V - 60Hz	13400	3927	1276	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5
RK125K	1PH, 208/230V - 60Hz	8790	2576	837	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK134K	1PH, 208/230V - 60Hz	9300	2725	886	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK141K	1PH, 208/230V - 60Hz	9800	2872	933	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK164K	1PH, 208/230V - 60Hz	11500	3370	1095	10.5	3.08	350	12.0	224	41.3	160.5	84.5	69.5
RK173K	1PH, 208/230V - 60Hz	12300	3604	1171	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5
RK178K	1PH, 208/230V - 60Hz	12500	3663	1190	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5
RK185K	1PH, 208/230V - 60Hz	13000	3810	1238	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5
RK191K	1PH, 208/230V - 60Hz	13400	3927	1276	10.5	3.08	350	12.3	240	41.3	160.5	84.5	69.5

※ 1) Normal performance value is $\pm 5\%$.

2) All data above is rated at ASHRAE-T condition.

3) Figures in the table are subject to change without prior notice for performance improvement.

Private Picture Copyright : WWW.MBSM.PRO

Specifications

Ref.	Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (Kg)	Dimension (mm)				
			(Btu/hr)	(Watts)						A	B	C	D	E
R22	QJ176V	AC Inverter, 124V - 60Hz	12240	3587	1141	10.7	3.14	410	14.0	245.0	263	36.2	65	109.0
R410A	GJ176V	AC Inverter, 124V - 60Hz	16950	4967	1803	9.4	2.75	600	15.2	266.3	283	50.8	75	113.0

※ 1) Normal performance value is $\pm 5\%$.

2) All data above is rated at ASHRAE-T condition.

3) Figures in the table are subject to change without prior notice for performance improvement.

4) Frequency Range : 30Hz ~ 120Hz

Private Picture Copyright : WWW.MBSM.PRO

Specifications

60Hz

Application	Model	Power Source	Cooling Capacity		Motor Input (Watts)	EER (Btu/W.hr)	COP (W/W)	Oil Charge (cc)	Weight (kg)	Dimension (mm) A
			(Btu/hr)	(Watts)						
Dehumidifier	QS050C	1PH, 115V - 60Hz	3440	1008	370	9.3	2.72	180	5.4	194
	QS064C	1PH, 115V - 60Hz	4450	1304	473	9.4	2.76	180	5.4	194
	QS075C	1PH, 115V - 60Hz	5250	1539	570	9.2	2.70	180	5.4	194
Air Conditioner	QS072C	1PH, 115V - 60Hz	5160	1539	515	10.2	2.99	180	6.4	208
	QS075C(H)	1PH, 115V - 60Hz	5250	1539	490	10.7	3.14	180	6.4	208

* The models below 5,000btu/hw, are available on the customer's demands.

* 1) Normal performance value is $\pm 5\%$.

2) All data above is rated at ASHRAE-T condition.

3) Figures in the table are subject to change without prior notice for performance improvement.

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_LG-air-conditioning-compressor-catalogueTélécharger