## Mbsm.pro, Compressor, Huaguang, Wanbao, ETZ95, 9.6 cm3, RSCR, 165 w, 563 BTU, r600a, LBP

Category: compressor

written by www.mbsm.pro | 24 March 2024



Mbsm.pro, Compressor, Huaguang, Wanbao, ETZ95,  $9.6~\mathrm{cm3}$ , RSCR,  $165~\mathrm{w}$ ,  $563~\mathrm{BTU}$ ,  $r600\mathrm{a}$ , LBP

## Mbsm.pro, Panasonic, Compressor, DB66C10RAW5, RSCR, 1/5 hp, Lbp

Category: compressor



Mbsm.pro, Panasonic, Compressor, DB66C10RAW5, RSCR, 1/5 hp, Lbp

Mbsm.pro, Compressor, SAMSUNG, SK182H-L2U, 1/4 hp++, 1/3 hp -, 236 w, 806 BTu, Rscr, lbp, r134 a


Category: compressor



Mbsm.pro, Compressor, SAMSUNG, SK182H-L2U, 1/4 hp++, 1/3 hp -, 236 w, 806 BTu, Rscr, lbp, r134 a

Mbsm.pro, Compressor, HML190a, 1/4 hp, zel, Lambda, LBP, RSCR, Freezing compressor, R600a, 190 w, 163 kcal/h, run capacitor 3 μF, aluminum wire

Category: compressor

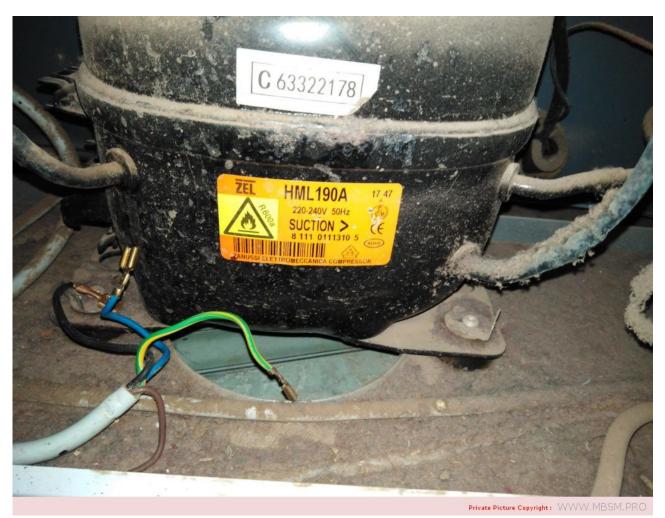

Mbsm.pro, Compressor, HML190a, 1/4 hp, zel, LBP, RSCR, Freezing compressor, R600a, 190 w, 163 kcal/h, run capacitor 3  $\mu$ F, aluminum wire

Mbsm.pro, COMPRESOR, N1112dY, 1/6 Hp, N1116dY, 1/5 Hp, LBP, JIAXIPERA, R-600a, 4  $\mu$ F, RSCR, 220-240~/50

Category: compressor



Mbsm.pro, COMPRESOR, N1112dY, 1/6 Hp, N1116dY, 1/5 Hp, LBP, JIAXIPERA, R-600a, 4  $\mu\text{F}$ , RSCR, 220-240 $\sim$ /50

## Mbsm.pro, Compressor, LG, LX67LABM, Refrigeration, 1/5 HP, LBP, RSCR, 180 W, r134a

Category: compressor



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, LG, LX67LABM, Refrigeration, 1/5 HP, LBP, RSCR, 180 W

Mbsm.pro, LG, Compressor, cma075laem, 1/4 Hp, rscr, 220-240 v, 50 hz, 185 kcal/h, 734 btu/h, 215 w, r134a, Fixed Speed

Category: compressor written by www.mbsm.pro | 24 March 2024



Mbsm.pro, LG, Compressor, cma075laem, 1/4 Hp, rscr, 220-240 v, 50 hz, 185 kcal/h, 734 btu/h, 215 w, r134a, Fixed Speed

# Mbsm.pro, Compressor, MGA51C84rLX, MGA51C68RPU, Panasonic compressor, MSeries, Reciprocating Fixed Speed, 180 W, 1/5 Hp, RSCR, 220 V, r134a

Category: compressor

written by www.mbsm.pro | 24 March 2024



Mbsm.pro, Compressor, MGA51C84rLX, MGA51C68RPU, Panasonic compressor, M Series, Reciprocating Fixed Speed, 180 W, 1/5 Hp, RSCR, 220 V , r134a


## Mbsm.pro, Motor, compressor, type, RSIR, RSCR, CSIR, CSCR, PSC

Category: compressor

(1) RSIR
Resistance start induction run
(2) RSCR
Resistance start capacitor run
(3) CSIR
Capacitor start induction run
(4) CSCR/CSR/W-40
Capacitor start capacitor run
(5) PSC
Permanent split capacitor

(1) RSIR
Resistance start induction run
(2) RSCR
Resistance start capacitor run
(3) CSIR
Capacitor start induction run
(4) CSCR/CSR
Capacitor start capacitor run
(5) PSC
Permanent split capacitor


Private Picture Capyright: WWW,MBSM,PRO

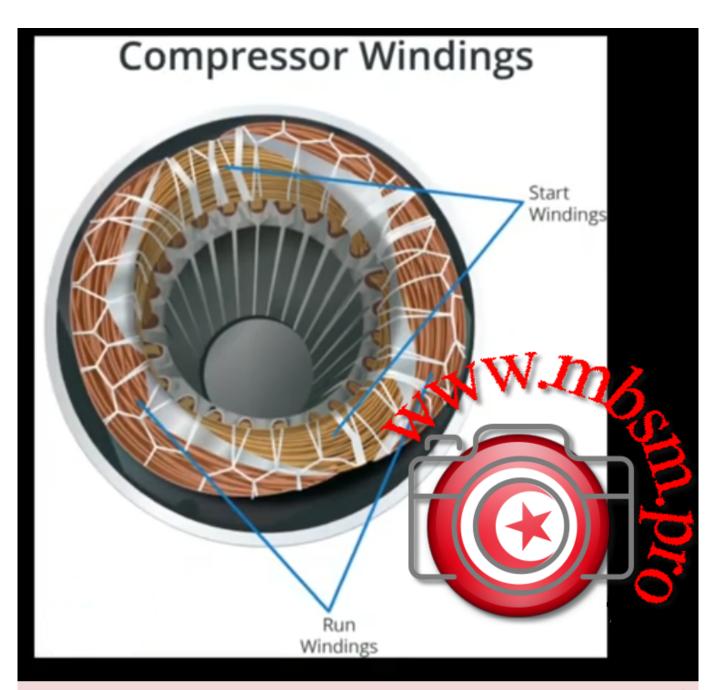




## RSIR



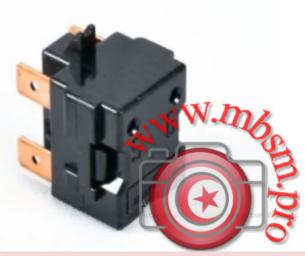

Private Picture Copyright: WWW.MBSM.PRO

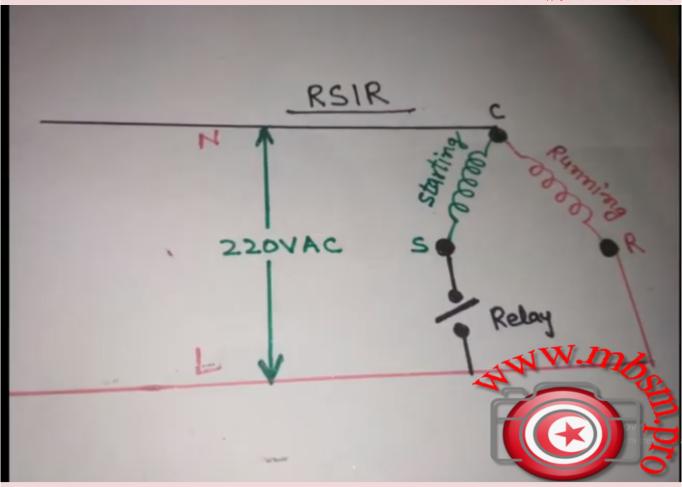


Private Picture Copyright: WWW.MBSM.PRO

# (2) RSCR Resistance start carrier run

Private Picture Copyright: WWW,MBSM,PRO



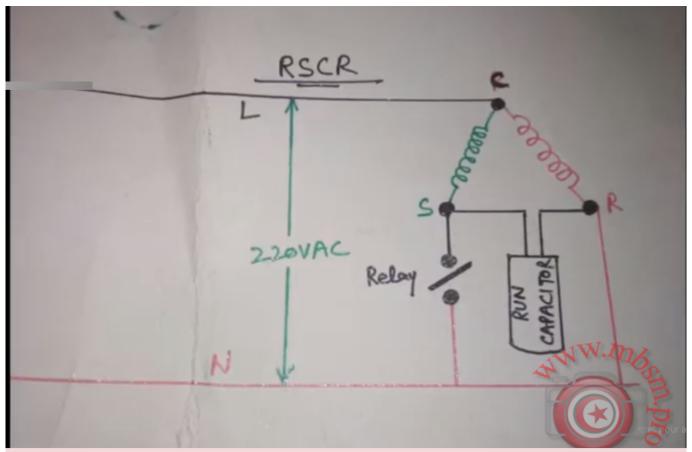


Private Picture Copyright: WWW, MBSM, PRO

# (3) CSIR Capacitor start induction run



Private Picture Copyright: WWW.MBSM.PRO

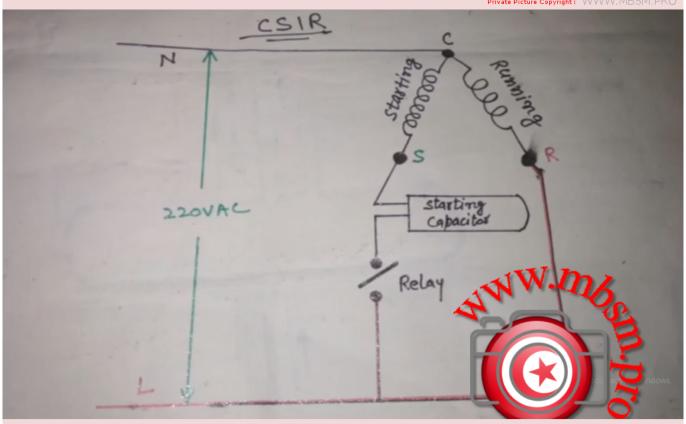


Private Picture Copyright: WWW.MBSM.PRO

## (4) CSCR/CSR Capacitor start capacitor run

Private Picture Copyright: WWW.MBSM.PRO



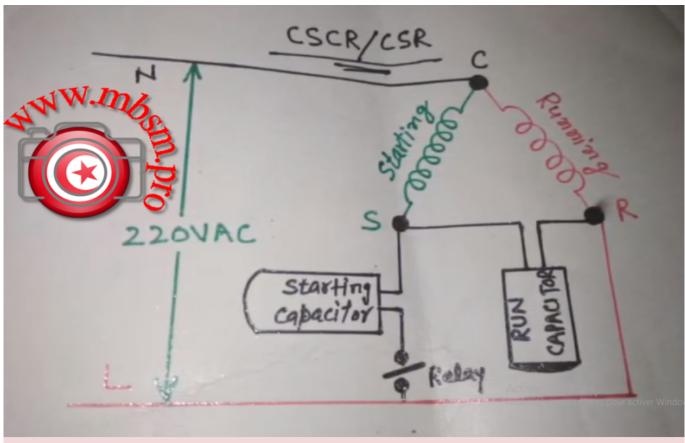

Private Picture Copyright: WWW.MBSM.PRO


## (5) PSC Permanent split capacitor







Private Picture Copyright: WWW,MBSM,PRO

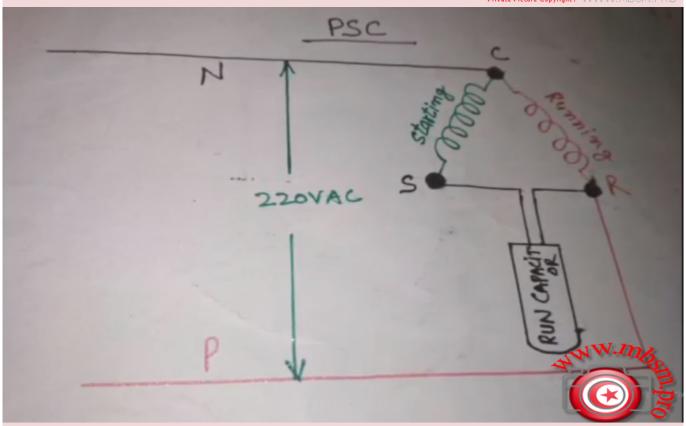

Private Picture Copyright: WWW, MBSM, PRO

## Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

Category: compressor, Files

written by www.mbsm.pro | 24 March 2024

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start

up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements

### Types of Electrical Motors

#### RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

#### **CSIR (Capacitor Start-Induction Run)**

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

#### RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

#### **CSR (Capacitor Start and Run)**

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced



Private Picture Copyright: WWW.MBSM.PRO

Type of starting device

Current relay — (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay — (electromechanical). CSR high-power motors.

PTC - (Positive Temperature Coefficient), the resistance increases

with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

 ${\sf NTC}$  — (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.

#### Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/ medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay - (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.



Private Picture Copyright: WWW.MBSM.PRO

Type of torque

LST — Low Starting Torque — Systems with capillary tube or balanced pressures at start up.

HST — High Starting Torque — Systems with expansion valve or capillary tube, with unbalanced pressures at start up.

# LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up. HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.

