

Mbsm.pro, Compressor, Samsung, HK6A3C2W, R134a, 1/3 hp++, 690 w , hbp, SDxx-SKxx-HKxx Series

Category: compressor

written by www.mbsm.pro | 25 May 2023

VOLTAGE	MODEL	TYPE	[V-Hz]	Cooling Capacity			W	EFF	COP	EER	TYPE
				Kcal/Hr	Watt	BTU/Hr					
AC 100V-50/60Hz	SD652E-S2W2	CSR	100-50	450	523	1,787	230	1.96	2.28	7.77	FC
			100-60	550	640	2,184	262	2.10	2.44	8.33	
	HK690E2W	CSR	100-50	780	907	3,097	390	2.00	2.33	7.94	FC
			100-60	950	1,105	3,772	445	2.13	2.48	8.48	
			100-50	HK6A	1,221	1,469	577	1.82	2.12	7.22	
100-60		1,250	1,453	4,963	644	1.94	2.26	7.71			
AC 115V-60Hz	SD643C-H2U2	RSCR	115-60	450	523	1,787	220	2.05	2.38	8.12	FC
	SD652C-H2U2	RSCR	115-60	550	640	2,184	262	2.10	2.44	8.33	FC
	SK670C-H2Y	RSIR	115-60	720	837	2,858	390	1.85	2.15	7.33	FC
	SK682C-H2Y	RSIR	115-60	830	965	3,295	460	1.80	2.10	7.16	FC
	SK661C-H2Y	RSIR	115-60	1,080	1,256	4,288	630	1.71	1.99	6.81	FC
	HK672C2Z	RSIR	115-60	750	872	2,978	370	2.03	2.36	8.05	FC
	HK680C2Z	RSIR	115-60	850	988	3,375	430	1.98	2.30	7.85	FC
	HK690C2Z	RSIR	115-60	950	1,105	3,772	490	1.94	2.25	7.70	FC
	HK6A1C2U	RSCR	115-60	1,090	1,267	4,327	545	2.00	2.33	7.94	FC
	HK6A3C2W	CSR	115-60	1,250	1,453	HK6A	690	1.81	2.11	7.19	FC
AC 220V-60Hz	SD643B-H2U2	RSCR	220-60	450	523	1,787	220	2.05	2.38	8.12	FC
	SD643B-H2UB	RSCR	220-60	480	558	1,906	238	2.02	2.35	8.01	FC
	SD652B-S2W2	CSR	220-60	550	640	2,184	255	2.16	2.51	8.56	FC
	SD652B-H2UB	RSCR	220-60	570	663	2,263	270	2.11	2.45	8.38	FC
	SK670B-H2U	RSCR	220-60	720	837	2,858	330	2.18	2.54	8.66	FC
	SK682B-H2U	RSCR	220-60	830	965	3,295	405	2.05	2.38	8.14	FC
	SK661B-S2W	CSR	220-60	1,080	1,256	4,288	560	1.93	2.24	7.66	FC
	HK672B2Z	RSIR	220-60	750	872	2,978	370	2.03	2.36	8.05	FC
	HK680B2Z	RSIR	220-60	850	988	3,375	430	1.98	2.30	7.85	FC
	HK690B2Z	RSIR	220-60	950	1,105	3,772	490	1.94	2.25	7.70	FC
AC 220-240V-50Hz	HK6A1B2W	CSR	220-60	1,090	1,267	4,327	520	2.10	2.44	8.32	FC
	HK6A3B2W	CSR	220-60	1,250	1,453	4,963	650	1.92	HK6A	7.63	FC
	SD643Q-H2Z2	RSIR	230-50	370	430	1,469	197	1.88	2.18	7.46	FC
	SD652Q-H2Z2	RSIR	230-50	450	523	1,787	220	2.05	2.38	8.12	FC
	SK670Q-H2S	CSIR	230-50	600	698	2,382	310	1.94	2.25	7.68	FC
	SK670Q-H2Z	RSIR	230-50	595	692	2,362	310	1.92	2.23	7.62	FC
	SK682Q-H2Z	RSIR	230-50	700	814	2,779	365	1.92	2.23	7.61	FC
	SK6A1Q-S2S	CSIR	230-50	900	1,047	3,573	480	1.88	2.18	7.44	FC
	HK672Q2Z	RSIR	220-50	610	709	2,422	305	2.00	2.33	7.94	FC
	HK680Q2Z	RSIR	220-50	700	814	2,779	350	2.00	2.33	7.94	FC
AC 220-240V-50Hz	HK690Q2Z	RSIR	220-50	780	907	3,097	380	2.05	2.39	8.15	FC
	HK6A1Q2Z	RSIR	220-50	910	1,058	3,613	465	1.96	2.28	7.77	FC
	HK6A3Q2U	RSCR	220-50	1,050	1,221	4,169	535	1.96	2.28	7.79	FC

COOLING TYPE	MOTOR TYPE	ASHRAE CONDITIONS (HBP)	UNIT CONVERSION TABLE
FC : Fan cooling OC : Oil cooling	RSIR : Resistance Start Induction Run RSCR : Resistance Start Capacitor Run	Evaporating Temp. : 7.2°C (45°F) Condensing Temp. : 54.4°C (130°F)	1 watt = 3.41 Btu/Hr 1 watt = 0.86 Kcal/Hr

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Samsung, HK6A3C2W, R134a, 1/3 hp++, 690 w , hbp, SDxx-SKxx-HKxx Series

Compressor Mk183g-l2u

Category: compressor

written by www.mbsm.pro | 25 May 2023



Mbsm.pro, Compressor, Samsung, mk183g-l2u, series MK, 1/3 hp, 236 w, Lbp, 203 KCL, 806 BTU, r134a, 3.8 cc, 220-240V ~ 50Hz, Low Back Pressure, compressor static without fan, PTC-RSCR (Optional RSIR)

**Mbsm.pro, compressor, MSV4A1A-L1B,
inverter, Blcdc, 1/5 hp, Samsung , 168
W**

Category: compressor

written by www.mbsm.pro | 25 May 2023



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, compressor, MSV4A1A-L1B, inverter, Bldc, 1/5 hp, Samsung , 168 w

SAMSUNG RSA1ZTWP

Category: Refrigerator

written by rober us | 25 May 2023

SUNG



S/N:Y2EH4ADD100340F

English	Model	Arabic
REFRIGERATOR MODEL :	RSA1NTWP	طراز الثلاجة
DIMENSION (W X D X H) :	912mm X 734mm X 1789mm	الأبعاد (العرض x العمق x الارتفاع)
GROSS CAPACITY :	555 liters	السعة الإجمالية
SASO VOLUME :	19.57 Cu.ft	حجم SASO
RATED VOLTAGE :	220V	الجهود المقدر
RATED FREQUENCY :	50/60Hz	التردد المقدر
RATED CURRENT :	0.8A	التيار المقدر
DEFROSTING INPUT :	280W	إدخال إذابة الثلج
POWER CONSUMPTION :	2.25kWh/24h	استهلاك الطاقة
PERCENTAGE RUNNING TIME :	56%	النسبة المئوية لمدة التشغيل
CLIMATIC CLASS OF THE APPLIANCE :	T	انفذة المناخية للجهاز
INSULATION CLASS OF MOTOR COMPRESSOR WINDING :	B	فئة عزل لفات ضاغط المحرك
RATED MAXIMUM INPUT OF LAMP :	(FREEZER LED 1.6W) (REFRIGERATOR LED 1.6W)	الحد الأقصى للإدخال المقدر للمصباح
NAME OF REFRIGERANT :	R-134a	الغاز المبرد بالثلاجة
MASS OF REFRIGERANT :	0.19kg	حجم الغاز المبرد
INSULATION BLOWING GAS :	CYCLO PENTANE	غاز العزل المتدفق
YEAR OF MANUFACTURE :	2013	
MADE IN CHINA		صنع في الصين

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, regenerator, SAMSUNG, RSA1ZTWP, 555 L, Compressor, 1/3 hp



Private Picture Copyright : WWW.MBSM.PRO

SAMSUNG



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

SUNG



S/N:Y2EH4ADD100340F

REFRIGERATOR MODEL:	FSA1NTWP	طرز التلاجة
DIMENSION (W X D X H):	92mm X 734mm X 178mm	الأبعاد (العرض * العمق * الارتفاع)
GROSS CAPACITY:	555 l/m	السعة الإجمالية
SASO VOLUME:	18-57 Cu.ft	حجم SASO
RATED VOLTAGE:	220V-	الجهد المقدر
RATED FREQUENCY:	50-60Hz	التردد المقدر
RATED CURRENT:	0.8A	التيار المقدر
DEFROSTING INPUT:	280W	ادخال اذابة الثلج
POWER CONSUMPTION:	2.25kWh/24h	استهلاك الطاقة
PERCENTAGE RUNNING TIME:	56%	النسبة المئوية لمدة التشغيل
CLIMATIC CLASS OF THE APPLIANCE:	T	الفئة المناخية للجهاز
INSULATION CLASS OF MOTOR COMPRESSOR WINDING:	B	فئة عزل لفات مضخة المحرك
RATED MAXIMUM INPUT OF LAMP:	(FREEZER) LED 1.0W (REFRIGERATOR) LED 1.0W	الحد الأقصى للإضاءة المقدر للمصباح
NAME OF REFRIGERANT:	R-134a	الغاز المبرد بالتلاجة
MASS OF REFRIGERANT:	0.19kg	حجم الغاز المبرد
INSULATION'S DRIVING GAS:	CYCLO-PENTANE	غاز العزل المتدفق
YEAR OF MANUFACTURE:	2013	سنة التصنيع
MADE IN CHINA		صنع في الصين

D499-01770X



Private Picture Copyright : WWW.MBSM.PRO



Mbsm.pro, Compressor, Samsung, r134a, 1bp, CD124Q, L1Z2CD130Q, S1ZACD130Q, L1Z2MSA143Q, S1ZMSA151Q, L1AMSA162Q, L1GMSS162Q, L1UMSA170Q, L1BMSA170Q, L1GMSA170Q, L1HMSA182Q, L2HMSS182Q, L2UNC1A37QLB

Category: compressor

written by mahdi miled | 25 May 2023

Modèle	RPM	TENSION [V-Hz]	Capacité de refroidissement			Entrée de puissance	EFFICACITÉ			Condition de test	Type de refroidissement
			Kcal/heure	Watt	BTU/h		FEP	FLIC	EER		
						O					
CD124Q-L1Z2	50Hz	220-50	43	50	171	57	0,75	0,88	2,99	ASHRAE	ST
CD130Q-S1ZA	50Hz	220-50	58	67	230	74	0,78	0,91	3,10	ASHRAE	ST
CD130Q-L1Z2	50Hz	220-50	58	67	230	65	0,89	1,04	3,54	ASHRAE	ST
MSA143Q-S1Z	50Hz	220-50	96	112	381	83	1,16	1,34	4,59	ASHRAE	ST
MSA151Q-L1A	50Hz	220-50	128	149	508	102	1,25	1,46	5,00	ASHRAE	ST
MSA162Q-L1G	50Hz	220-50	151	176	599	111	1,36	1,58	5,40	ASHRAE	ST
MSS162Q-L1U	50Hz	220-50	151	176	599	105	1,44	1,67	5,71	ASHRAE	ST
MSA170Q-L1B	50Hz	220-50	173	201	687	129	1,34	1,56	5,32	ASHRAE	ST
MSA170Q-L1G	50Hz	220-50	173	201	687	126	1,37	1,60	5,45	ASHRAE	ST
MSA170Q-L1H	50Hz	220-50	170	198	675	123	1,38	1,61	5,50	ASHRAE	ST
MSA182Q-L2H	50Hz	220-50	218	253	865	153	1,42	1,66	5,65	ASHRAE	ST
MSS182Q-L2U	50Hz	220-50	212	247	842	145	1,46	1,70	5,80	ASHRAE	ST
NCA137QLB	50Hz	220-50	90	105	357	80	1,13	1,31	4,47	ASHRAE	ST

Private Picture Copyright : WWW.MBSM.PRO

AC R134a LBP SPÉCIFICATION

AC200 - 240V~50Hz

CD124Q, L1Z2CD130Q, S1ZACD130Q, L1Z2MSA143Q, S1ZMSA151Q, L1AMSA162Q, L1GMSS162Q, L1UMSA170Q, L1BMSA170Q, L1GMSA170Q, L1HMSA182Q, L2HMSS182Q, L2UNC1A37QLB

Modèle	RPM	TENSION [V-Hz]	Capacité de refroidissement			Entrée de puissance	EFFICACITÉ			Condition de test	Type de refroidissement
			Kcal/heure	Watt	BTU/h		FEP	FLIC	EER		
						O					
CD124Q-L1Z2	50Hz	220-50	43	50	171	57	0,75	0,88	2,99	ASHRAE	ST
CD130Q-S1ZA	50Hz	220-50	58	67	230	74	0,78	0,91	3,10	ASHRAE	ST
CD130Q-L1Z2	50Hz	220-50	58	67	230	65	0,89	1,04	3,54	ASHRAE	ST
MSA143Q-S1Z	50Hz	220-50	96	112	381	83	1,16	1,34	4,59	ASHRAE	ST
MSA151Q-L1A	50Hz	220-50	128	149	508	102	1,25	1,46	5,00	ASHRAE	ST
MSA162Q-L1G	50Hz	220-50	151	176	599	111	1,36	1,58	5,40	ASHRAE	ST
MSS162Q-L1U	50Hz	220-50	151	176	599	105	1,44	1,67	5,71	ASHRAE	ST
MSA170Q-L1B	50Hz	220-50	173	201	687	129	1,34	1,56	5,32	ASHRAE	ST
MSA170Q-L1G	50Hz	220-50	173	201	687	126	1,37	1,60	5,45	ASHRAE	ST
MSA170Q-L1H	50Hz	220-50	170	198	675	123	1,38	1,61	5,50	ASHRAE	ST
MSA182Q-L2H	50Hz	220-50	218	253	865	153	1,42	1,66	5,65	ASHRAE	ST
MSS182Q-L2U	50Hz	220-50	212	247	842	145	1,46	1,70	5,80	ASHRAE	ST
NCA137QLB	50Hz	220-50	90	105	357	80	1,13	1,31	4,47	ASHRAE	ST

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, samsung,
EU4A5H-L2X , EU4A5HL2X, EU Serie,

R600a, LBN, Inverter, BLCD, 1/4 hp,

Category: compressor

written by www.mbsm.pro | 25 May 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, samsung, EU4A5H-L2X , EU4A5HL2X, EU Serie, R600a, LBN, Inverter, BLCD, 1/4 hp,

Samsung SR-40RMB Refrigerator compressor sk170h-11u 1/4 hp

Category: compressor, Refrigerator

written by www.mbsm.pro | 25 May 2023




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Samsung, SR-40RMB, Refrigerator, compressor, sk170h-l1u, 1/4 hp, r134, lbp, 195 w

Samsung 55A250JTAEM-SS 25300 btu Compressor

Category: pro

written by www.mbsm.pro | 25 May 2023

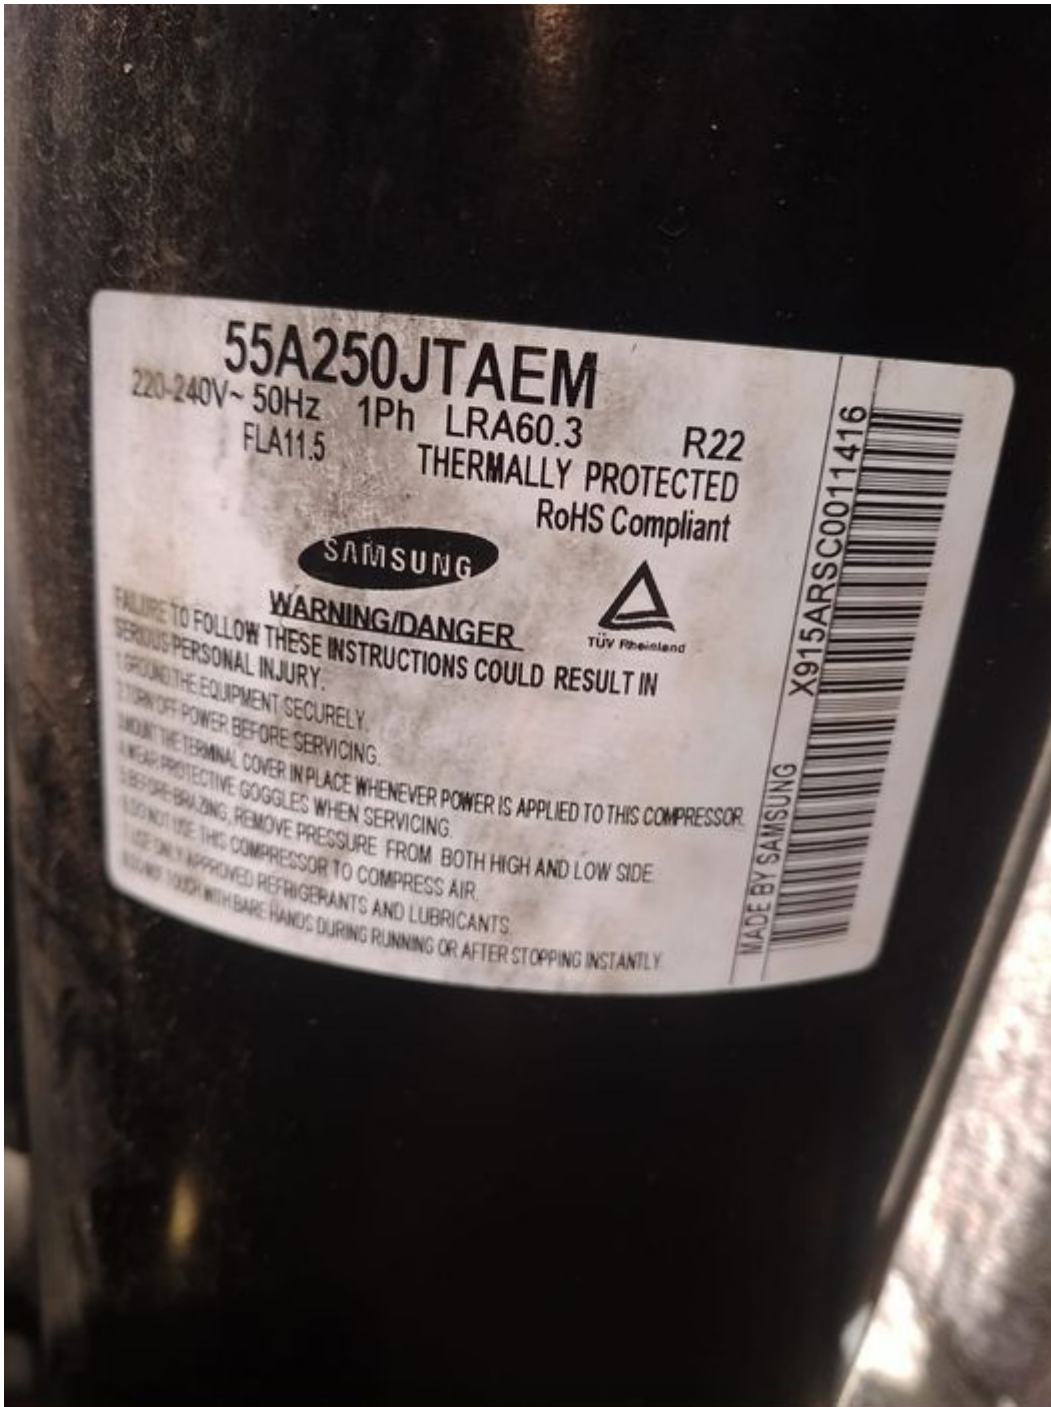

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Samsung, 55A250JTAEM-SS, 25300 btu, Compressor, 3 hp, r22

Samsung Compressor EU4A5Q-L2X EU4A5QL2X 1/4 hp lbn

Category: pro

written by www.mbsm.pro | 25 May 2023



mbsm.pro, Samsung, Compressor, EU4A5Q-L2X, EU4A5QL2X, (VEGZ11C Compatible Embraco) , 1/4 hp, inverter, r600

Mbsm.pro, Compressor, SAMSUNG, SK182H-L2U, 1/4 hp++, 1/3 hp -, 236 w, 806 BTu, Rscr, lbp, r134 a

Category: compressor

written by www.mbsm.pro | 25 May 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, SAMSUNG, SK182H-L2U, 1/4 hp++, 1/3 hp -, 236 w, 806 BTu, Rscr, lbp, r134 a