


Mbsm.pro, Scroll, Danfoss,
HRP051T4LP6, compressors, Hermetic,
49.15 kBtu/h, R22, R407C, 4 1/4Hp,
3Ph, POE, Lra 60A

Category: compressor

written by www.mbsm.pro | 5 January 2022

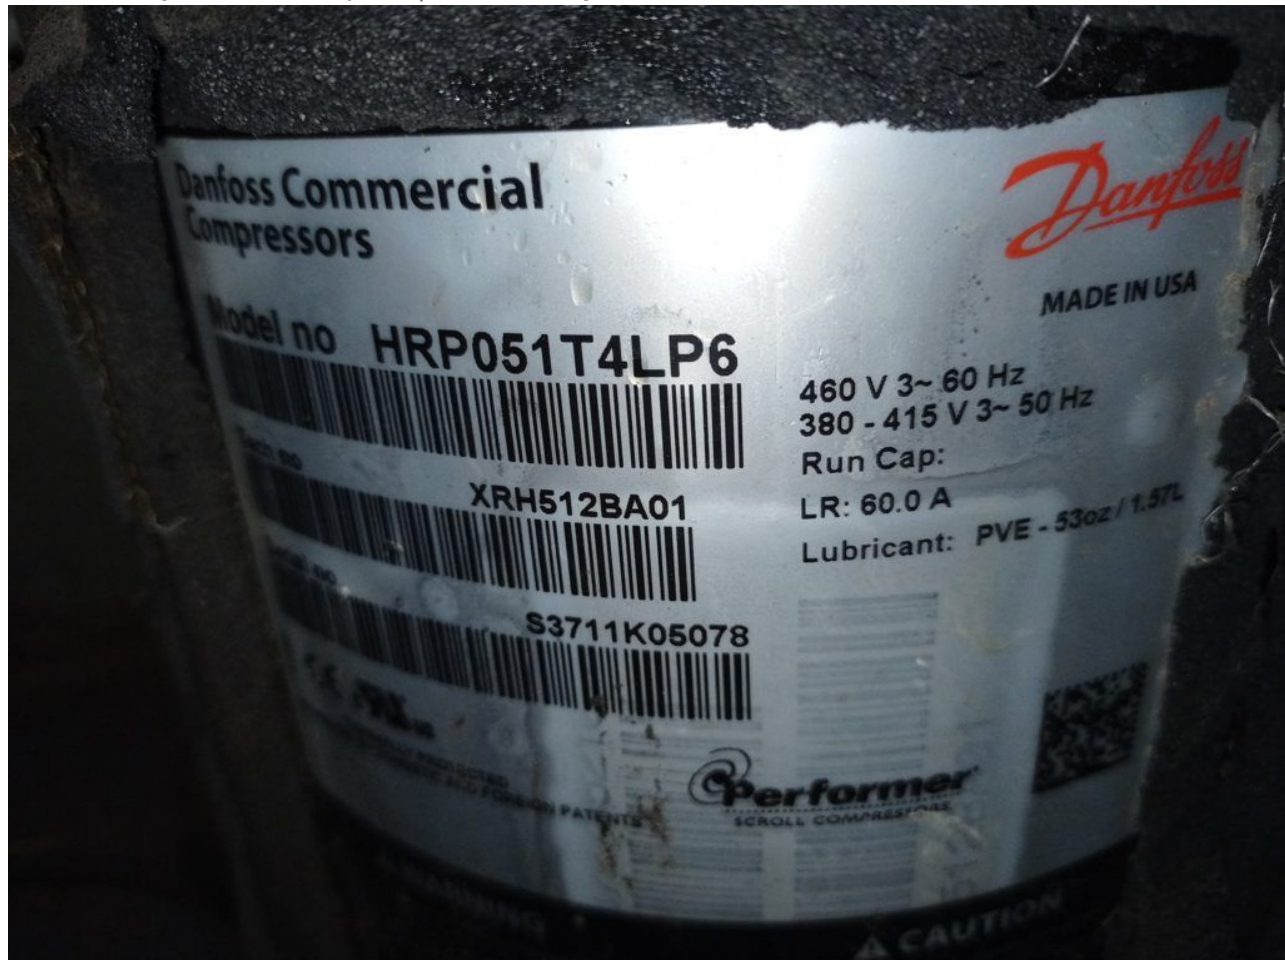

Private Picture Copyright: WWW.MBSM.PRO

bsm.pro, Scroll, Danfoss, HRP051T4LP6, compressors, Hermetic, 49.15 kBtu/h, R22,
R407C, 4 1/4Hp, 3Ph, POE, Lra 60A

Mbsm.pro, 5HP, 3PH, DAIKIN, scroll,
compressor, JT160BCBY1L, 15000W

Category: compressor

written by www.mbsm.pro | 5 January 2022



Private Picture Copyright : WWW.MBSM.PRO

Nominal Capacity: 51200 BTU/H(61100 BTU/H),15KW(17.9KW)

Output: 5 HP

Power Source : 380V 50/60Hz 3 PHASE

Testing Power Source: 380V 50(60Hz)

Input : 4.66 KW(5.54KW)

Current: 8.6 A(9.2A)

COP: 3.22(3.23) W/W

Capacity: 83.1 cubic centimeter/r

Color: Black

Voltage: 380-415V

Frequency: 50Hz

Horse Power: 5HP

Capacity: 15000W

Oil Charge: 1.4L

Daikin Scoll CompressorJT160BCBY1L for Air Conditioner
 air conditioner compressor parts Daikin compressor JT160BCBY1L
 Technical data

Daikin Scroll Compressor JT series

Model	Output (HP)	Power Source (V/Hz)	Performance
Nominal Capacity (W)	Input Power (Kw)	COP (W/W)	Noise (dB)
JT90BCB-Y1L	3	220/50	8540 2.89 2.96 58
JT90BC-Y1L	3	380/50	8540 2.75 3.11 58
JT95BCB-Y1L	3	380/50	8540 2.75 3.11 58
JT95BC-Y1L	3	380/50	9030 2.89 3.12 58
JT125BC-Y1L	4	380/50	11900 3.8 3.13 60
380/60	14200	4.53	3.13 63
JT125BCB-Y1L	4	380/50	11900 3.8 3.13 60
380/60	14200	4.53	3.13 63
JT160BC-Y1L	5	380/50	15000 4.66 3.22 60
380/60	17900	5.53	3.23 63
JT160BCB-Y1L	5	380/50	15000 4.66 3.22 60
380/60	17900	5.53	3.23 63
JT212D-Y1L	7.5	380/50	21500 6.49 3.31 72
JT212D-YE	400/60	25100	7.66 3.28 75
JT236D-Y1L	7.5	380/50	24000 7.2 3.33 72
JT236D-YE	400/60	28300	8.53 3.32 75
JT265D-Y1L	8	380/50	26700 7.95 3.36 72
JT265D-YE	400/60	31800	9.45 3.37 75
JT300D-Y1L	10	380/50	29900 8.85 3.38 72
JT300D-YE	400/60	35200	10.4 3.38 75
JT315D-Y1L	11	380/50	31100 9.15 3.4 72
JT335D-Y1L	12	380/50	34000 9.98 3.41 72
JT335D-YE	400/60	40100	11.8 3.4 75

Model	Power(HP)	Voltage	Test Voltage	Capacity	Input power	Current	COP	Displacement
			KW	BTU/H	KW	A	W/W	Cm3/r
JT212DA-Y1	7	380-415V, 3P, 50Hz	380V/50Hz	18.9	64500	6.87	11.7	2.75 117.3
JT265DA-Y1	8.5		23.4	79800	8.36	14.1	2.8	144.7
JT300DA-Y1	10	400V/50Hz	26.5	90400	9.44	16	2.81	163
JT335DA-Y1	12		29.9	102000	10.7	17.9	2.79	184.2
JT300DA-Y1L	10	380V/50Hz	29.6	101000	9.55	16.4	3.1	163
JT335DA-Y1L	12		33.7	115000	18.3	3.12	184.2	
JT212D-P1YE	7	380-415V/400-440V, 3P, 50/60Hz	380V/50Hz; 400V/60Hz	21.3/24.9	73400/85700	6.56/7.74	11.3/11.9	3.25/3.22 117.3
JT236D-P1YE	7.5	380V/50Hz	23.8	81900	7.27	12.4	3.27	131
400V/60Hz	28.1	96600	8.62	13.2	3.26			
JT265D-P1YE	8.5	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7
400V/60Hz	31.5	108500	9.55	14.6	3.3			
JT300D-P1YE	10	380V/50Hz	29.6	102000	8.94	15.2	3.31	163
400V/60Hz	34.9	120200	10.51	16.2	3.32			
JT335D-P1YE	12	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2
400V/60Hz	39.4	136900	11.92	18.4	3.34			

 **DAIKIN**

COMPRESSOR

MODEL	JT160BCBY1L			
POWER SOURCE	THREE	PHASE		
	380	V	50	Hz
REF.	380	V	60	Hz
REF.OIL	R22			
MFG.NO.	DAPHNE SE56P			
DP-AP	07002624			
SP	H	3.0	MPa	L 1.3 MPa
	H	10.5	MPa	L 10.5 MPa



MADE IN CHINA
XI'AN DAIKIN QING'AN COMPRESSOR CO.,LTD.

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_JT160BCBY1L-Technical-ManualTélécharger