


Compressor, QD110, 3/10 HP, LBP, R12/R406, 276w, R12, R406

Category: compressor


written by www.mbsm.pro | 23 March 2021

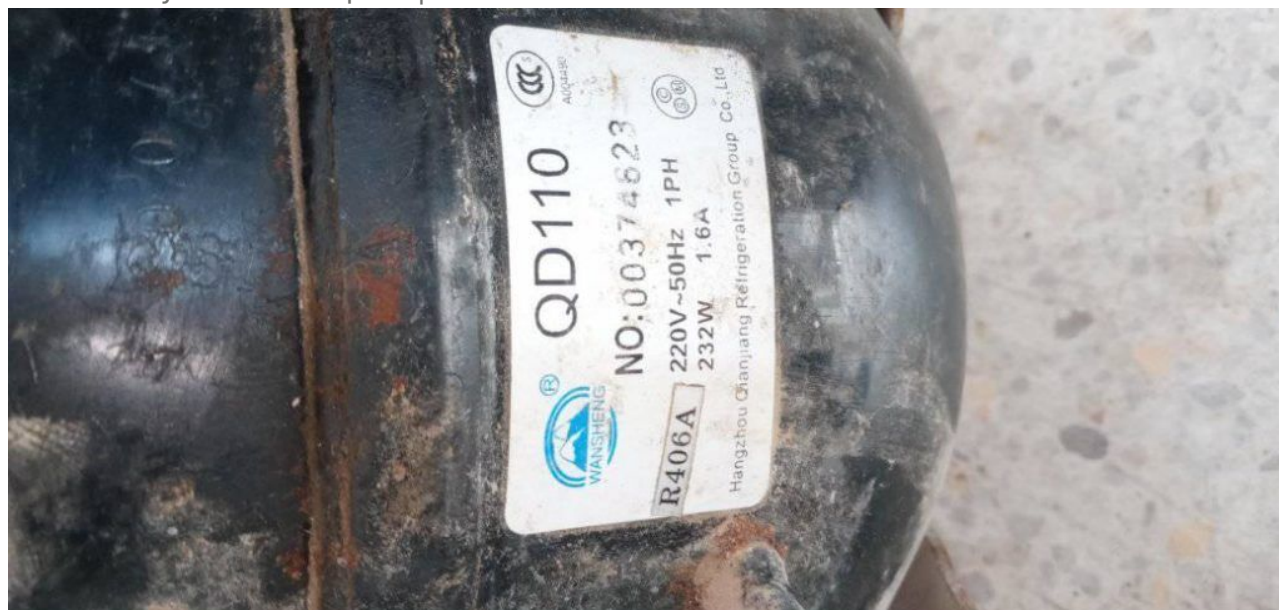

Private Picture Copyright : WWW.MBSM.PRO

Quantité(Pièce) 1 – 30 31 – 70 71 – 150 >150
 Durée estimée (jours) 5 10 15 À négocier
 Tension: 220 V-240 V
 50 HZ
 Compresseur LBP R12/R406

Modèle	Valage (V)	Fréquence (Hz)	Déplacement (CC)	Capacité (W)	Puissance d'entrée (W)	Type de moteur	De charge d'huile (CC)	Type de refroidissement	Poids (Kg)
QD30	220-240	50	3.0	62	81	RSIR	180	ST	6.3
QD36	220-240	50	3.6	75	93	RSIR	180	ST	6.4
QD55	220-240	50	5.5	133	110	RSIR	240	ST	8.4
QD65	220-240	50	6.5	155	130	RSIR	240	ST	8.4
QD75	220-240	50	7.5	176	146	RSIR	240	ST	8.6
QD85	220-240	50	8.5	202	168	RSIR	240	ST	8.9
QD110	220-240	50	11.0	276	236	RSIR	240	ST	9.9
QD125	220-240	50	12.5	305	254	RSCR	280	ST	11.2

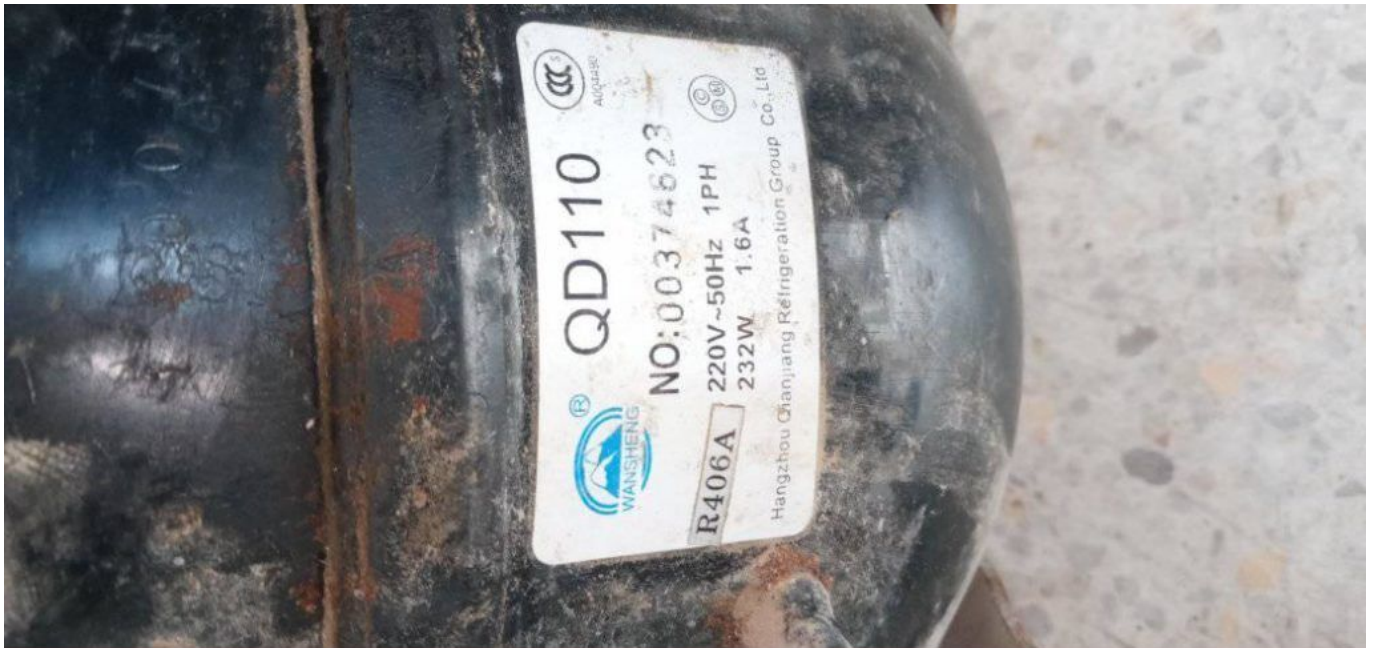

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_QD110-1Télécharger

R406a 220~240V/50Hz

LBP
低背压

序号 No.	应用类型 Application	产品系列 Serial	产品型号 type	马力 Hp	电压/频率 Power Supply (V/Hz)	电机类型 Motor type	制冷量 Capacity		COP Power Efficiency		启动器 Starting Device	启动电容 Starting Capacitor (μF)	运行电容 Running Capacitor (μF)	冷却方式 Cool
							ASHRAE (-23.3°C)	CECOMAF (-25°C)	ASHRAE (-23.3°C)	CECOMAF (-25°C)				
1	LBP 低背压	WT	QD55	1/6	220~240V ~50Hz	RSIR	130	98	1.04	0.81	PTC	/	/	S
2			QD65	1/5		RSIR	158	119	1.08	0.84		/	/	S
3			QD75	1/4		RSIR	176	132	1.09	0.85		/	/	S
4			QD85	1/4		RSIR	202	152	1.10	0.86		/	/	S
5			QD91	1/4		RSIR	216	162	1.12	0.87		/	/	S
6	LBP 低背压	WQ	QD110	3/10	220~240V ~50Hz	RSIR	271	203	1.17	0.91	重锤 Starting Relay	/	/	F
7			QD128	1/3		RSIR	306	230	1.18	0.92		/	/	F
8			QD142	2/5		CSIR	333	250	1.19	0.93		80	/	F
9	LBP 低背压	SC	QD168	1/2	220~240V ~50Hz	CSIR	380	330	1.15	1.06	电流式 Current	80	/	F2
10			QD180	1/2		CSIR	440	382	1.15	1.07		80	/	F2
11			QD210	3/5		CSIR	510	443	1.17	1.08		80	/	F2

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic,
Compressor , R600a, Lj126Cy,
lu126cy1, 1/3 Hp, R600a

Category: compressor

written by www.mbsm.pro | 23 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

Category: compressor

written by www.mbsm.pro | 23 March 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

MODEL QA66C14GAX5
220V ~ 50Hz 1PH R134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
MADE IN MALAYSIA



Electrostar
الكتروستار

Model **ES170 T**

طراز

W **136** وات

A **1.12** أمبير

HZ **50**

ذبذبة

Ser No.



018018

ممتثل

V

220

فولت

R134a

100 gm

وزن وسيط
التبريد

Total Capacity 170 Lit.

Class T


صنع في مصر

Vacuum Pump, 1/4 Hp , Vane Pump, Rotary Vane, Valve Rotary, POMPE À VIDE, Restoration

Category: Technologie, Tester ok
written by www.mbsm.pro | 23 March 2021



Private Picture Copyright : WWW.MBSM.PRO

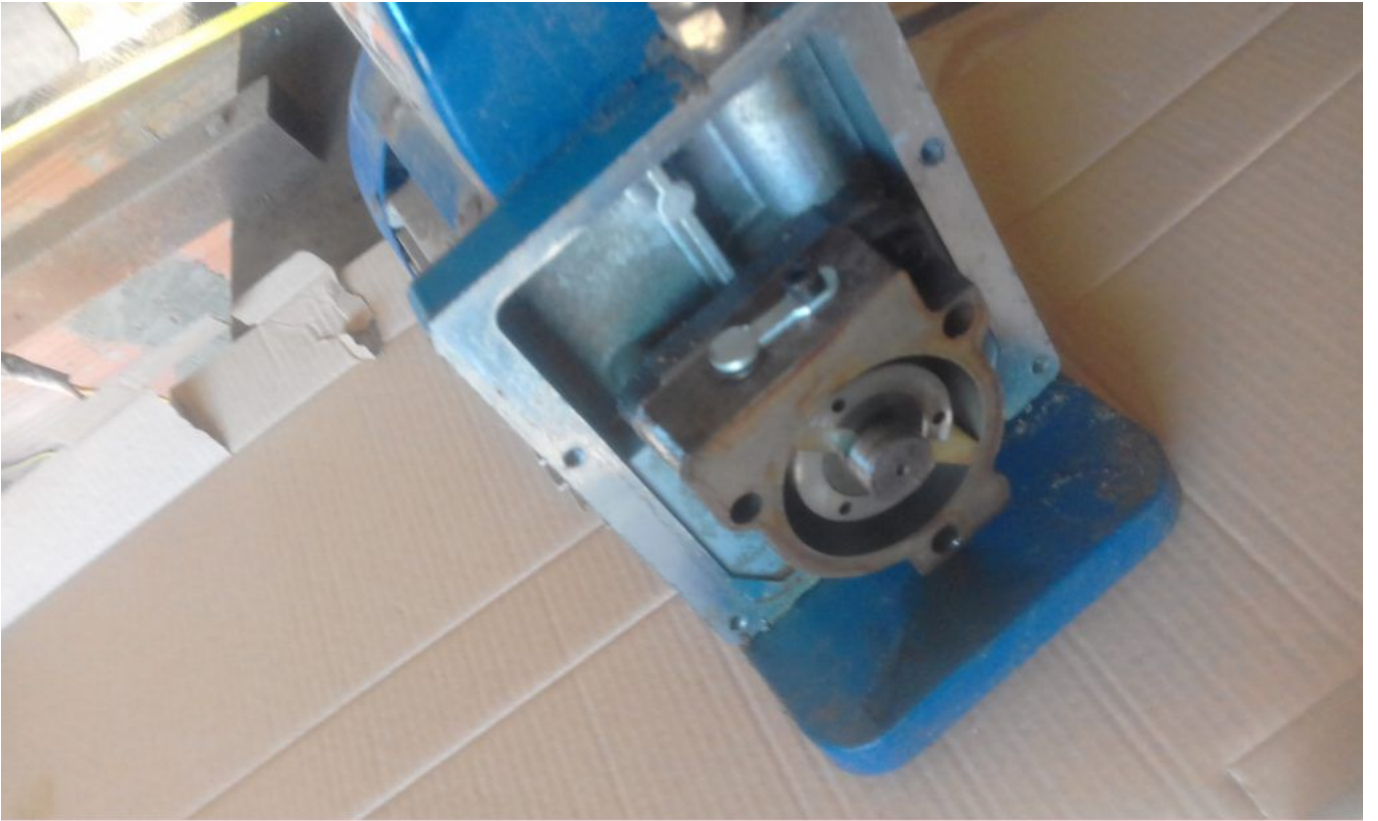

Private Picture Copyright: WWW.MBSM.PRO






Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

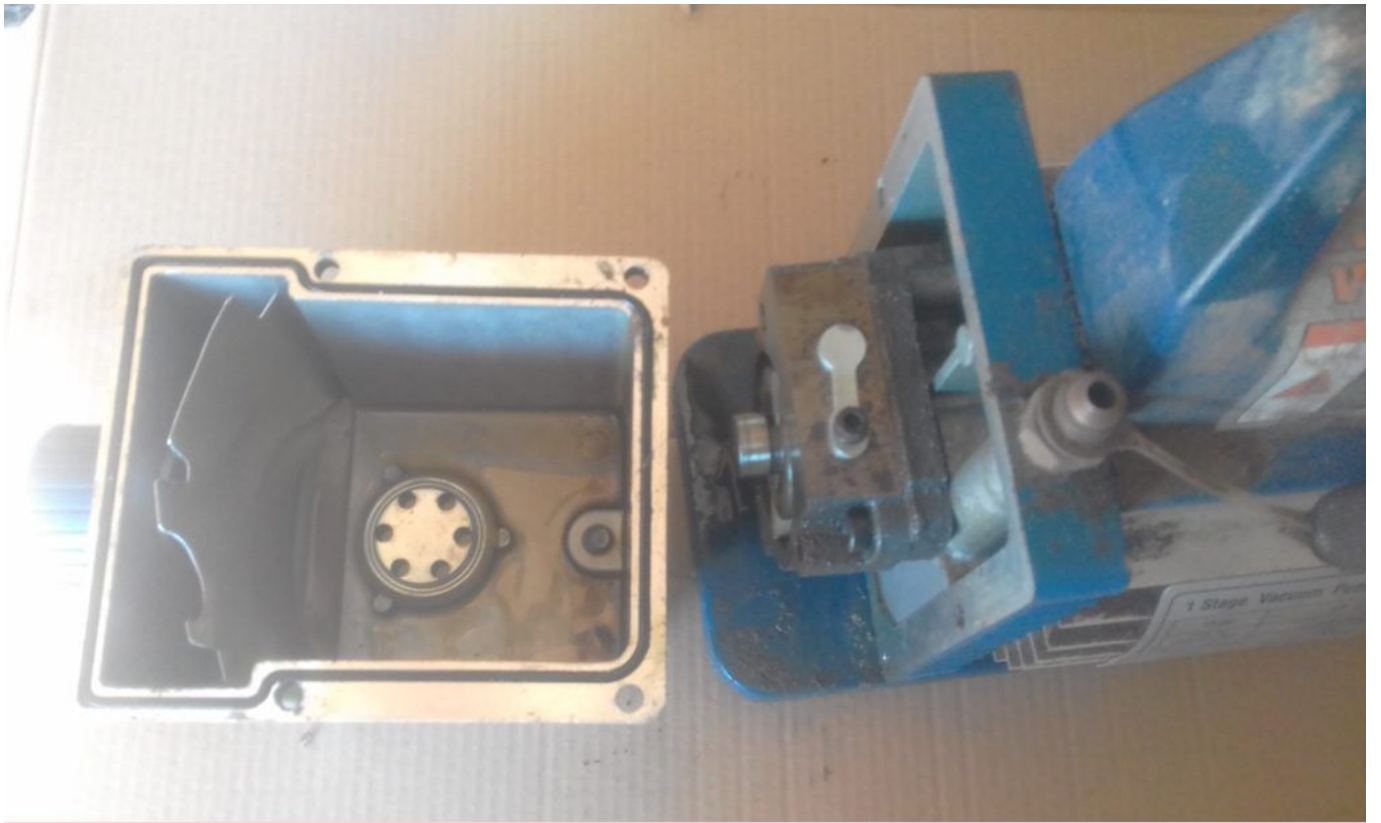

Private Picture Copyright: WWW.MBSM.PRO




Private Picture Copyright: WWW.MBSM.PRO




Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

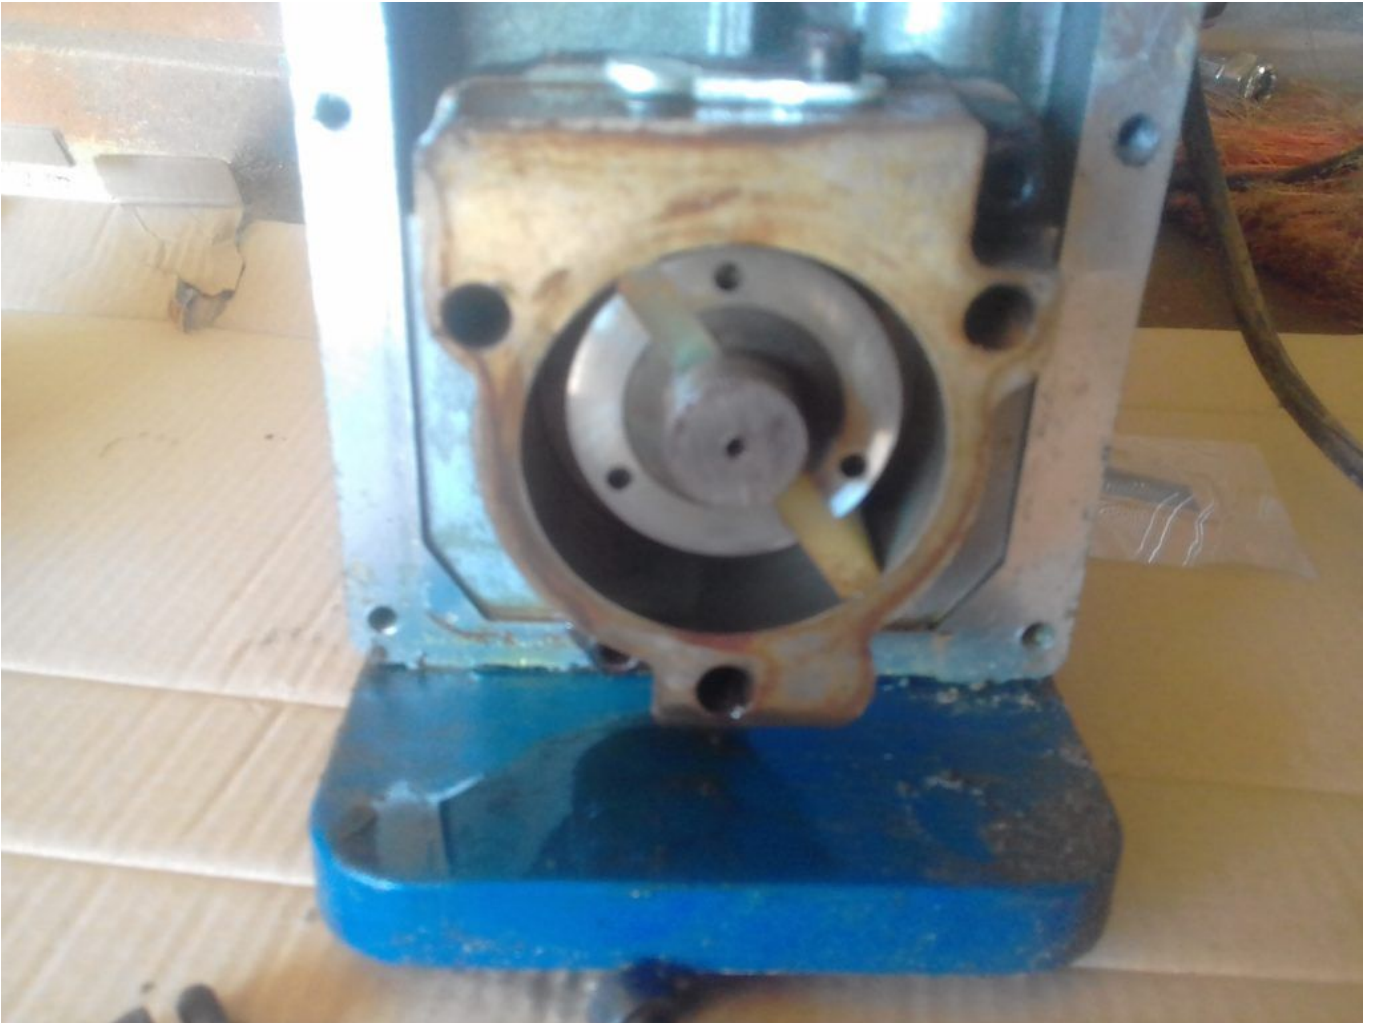

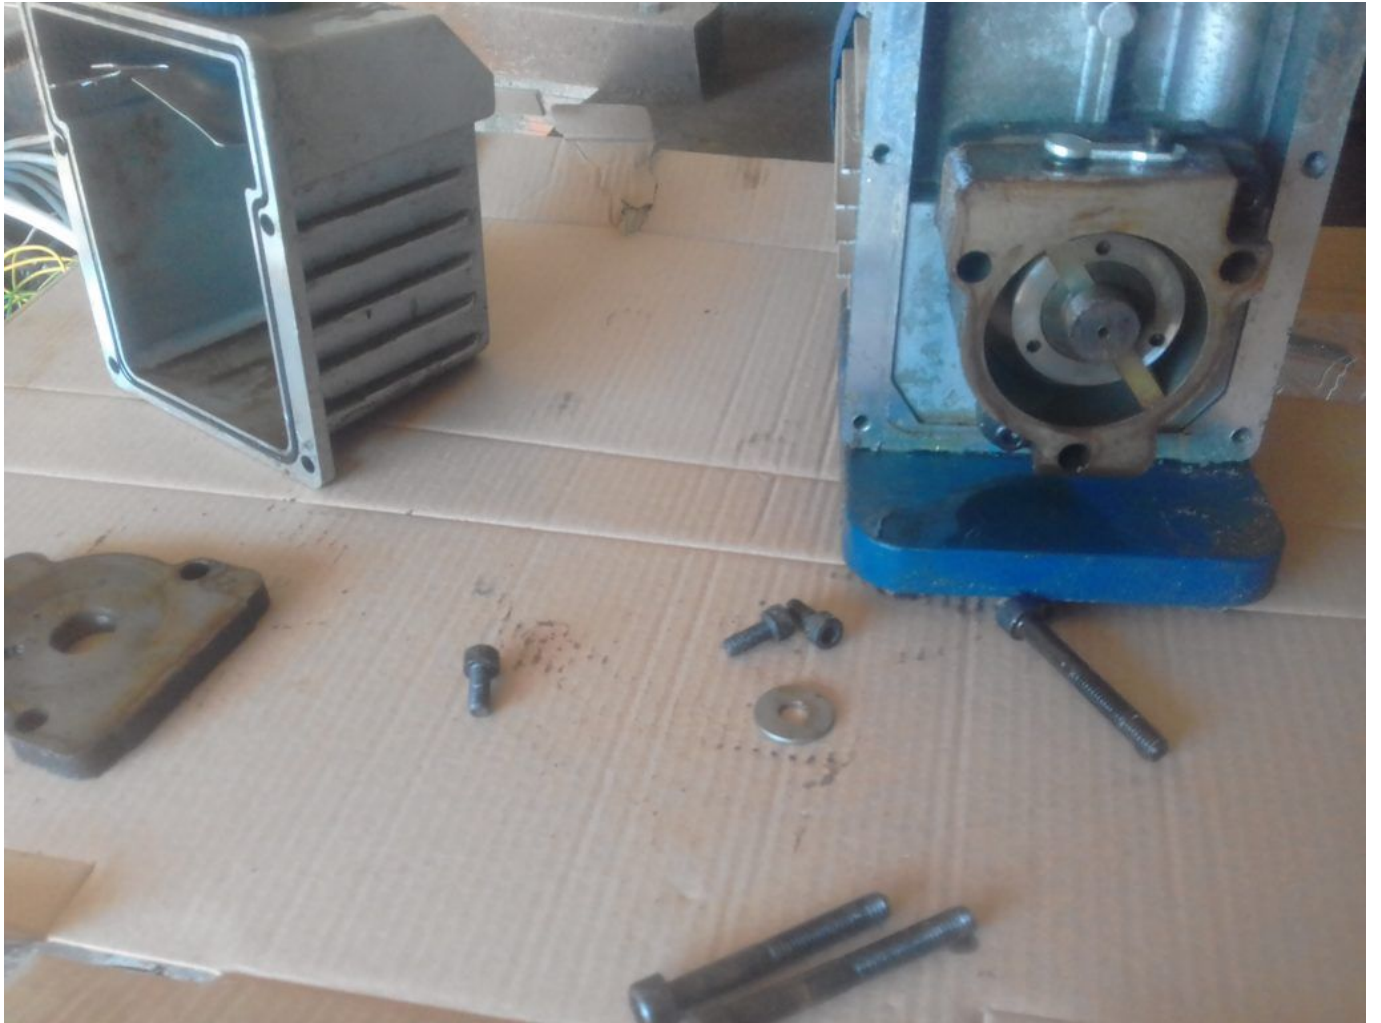







Private Picture Copyright: WWW.MBSM.PRO





















Private Picture Copyright: WWW.MBSM.PRO





Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Free, Program, Download, Msmgroup Cls Clean, Small Program to clean everything in Startup Windows

Category: Programmation

written by www.mbsm.pro | 23 March 2021

<input type="checkbox"/> Nom	Modifié le	Type	Taille
<input checked="" type="checkbox"/> Mbsmgroup.exe	28/01/2021 22:25	Application	5 985 Ko

Description du fichier : Mbsmgroup Cls Clean Installer
Entreprise : MBSMGROUP
Version du fichier : 1.0.0.0
Date de création : 28/01/2021 22:25
Taille : 5,84 Mo



Private Picture Copyright : WWW.MBSM.PRO


<input type="checkbox"/> Nom	Modifié le	Type	Taille
<input checked="" type="checkbox"/> Mbsmgroup.exe	28/01/2021 22:25	Application	5 985 Ko

Description du fichier : Mbsmgroup Cls Clean Installer
Entreprise : MBSMGROUP
Version du fichier : 1.0.0.0
Date de création : 28/01/2021 22:25
Taille : 5,84 Mo



Private Picture Copyright : WWW.MBSM.PRO

MGS Installation de Mbsmgroup Cls Clean

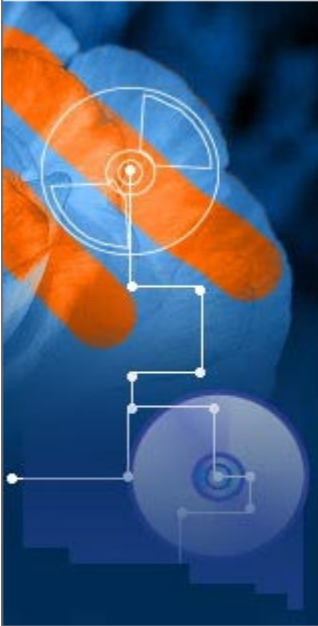


Bienvenue dans l'Assistant de Configuration de Mbsmgroup Cls Clean


L'Assistant de Configuration va installer Mbsmgroup Cls Clean sur votre ordinateur. Cliquez sur "Suivant" pour continuer ou "Annuler" pour quitter l'Assistant de Configuration.

< Précédent **Suivant >** Annuler


Private Picture Copyright : WWW.MBSM.PRO

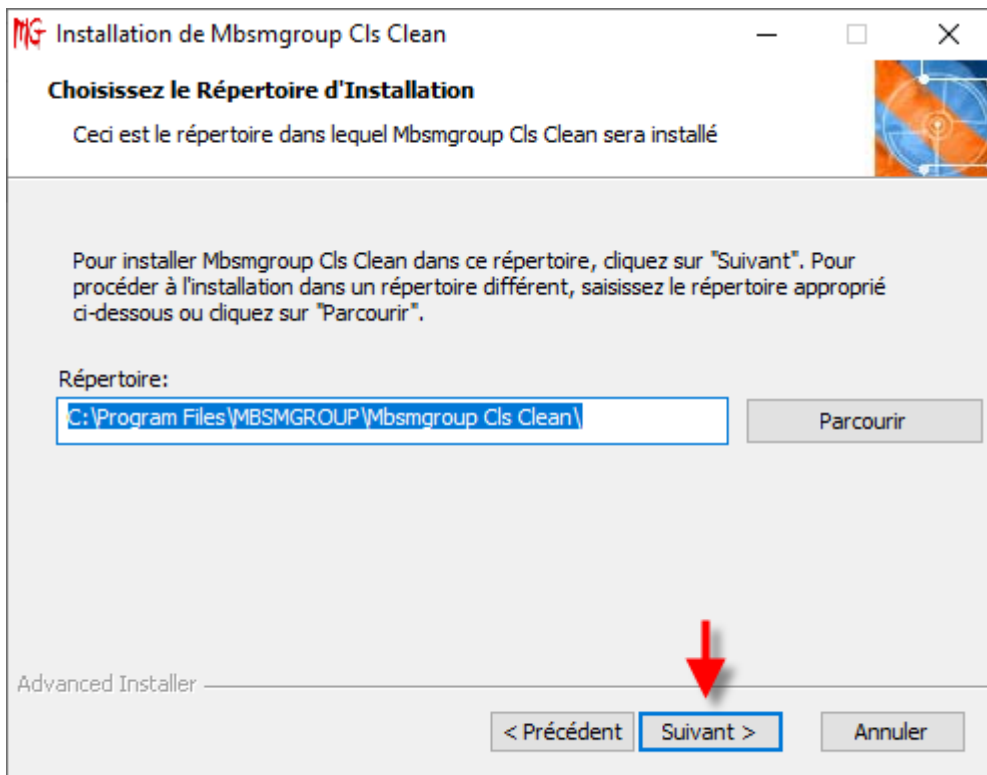

Private Picture Copyright : WWW.MBSM.PRO

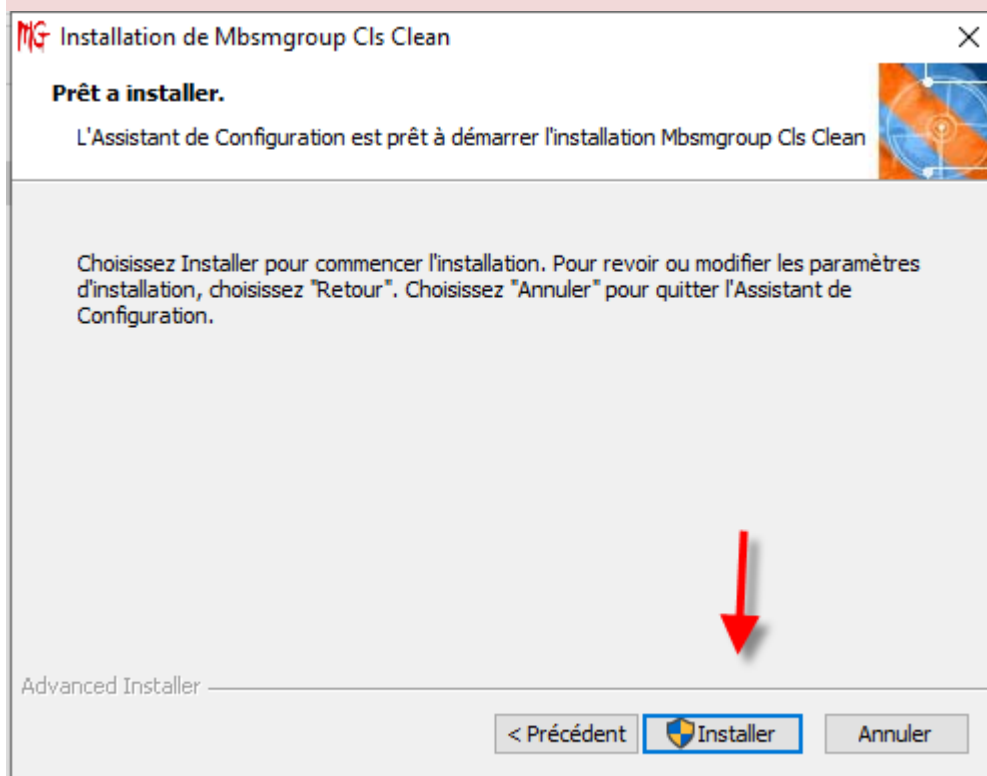

Private Picture Copyright : WWW.MBSM.PRO

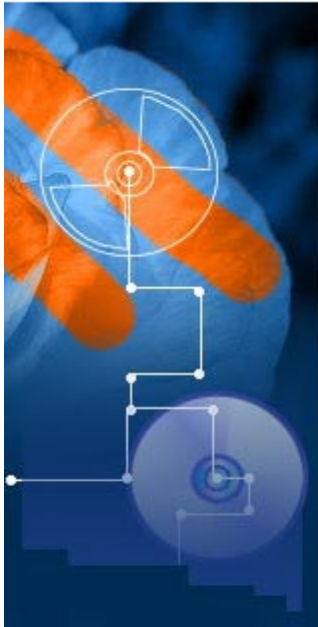

Fin de l'Assistant de Configuration de Mbsmgroup Cls Clean

Cliquez sur le bouton "Terminer" pour sortir de l'Assistant de Configuration



< Précédent

Terminer

Annuler

Private Picture Copyright : WWW.MBSM.PRO


Danfoss, Compressor, 5 Hp, R22, Démontage, ouverture, DESTRUCTION

Category: compressor


written by www.mbsm.pro | 23 March 2021



Private Picture Copyright : WWW.MBSM.PRO

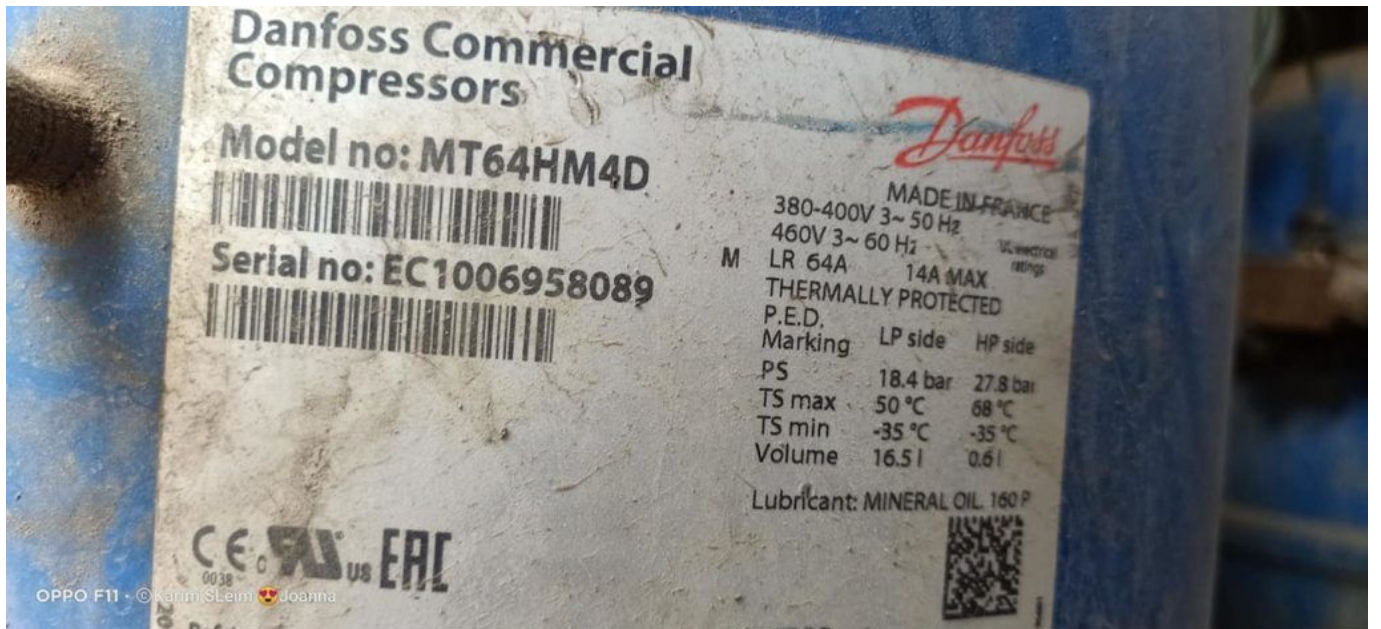

Private Picture Copyright: WWW.MBSM.PRO

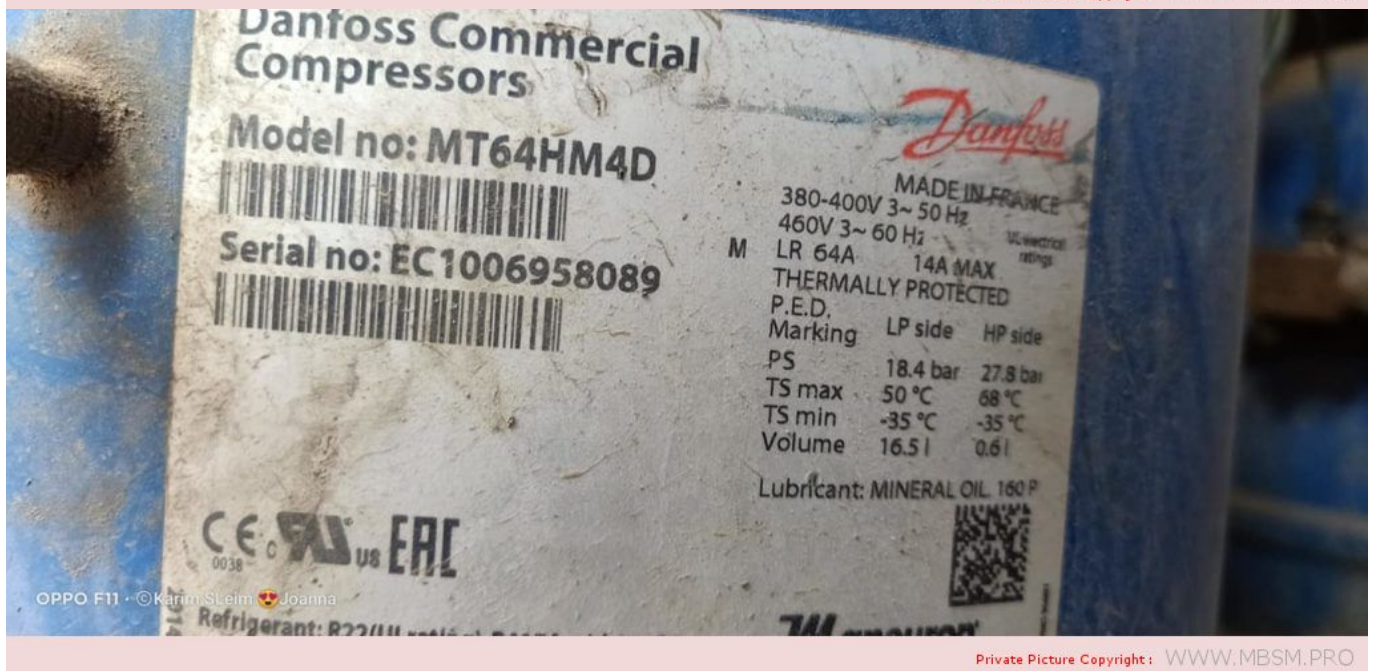

Private Picture Copyright: WWW.MBSM.PRO

Product : Compressor
 产地: 法国制造
 Plant : Made in France
 客户: 丹佛斯自动控制管理(上海)有限公司
 Customer service: Danfoss Automatic Controls Management (Shanghai) Co.Ltd
 地址电话: 上海市宜山路900号科技大楼C楼20层200233 / (021)61513000
 Address/Tel: 20th Floor Block C, Hi-Tech Building
 900 Yi Shan Road Shanghai 200233 / (021)61513000
 警告: 只有具备一定经验和安全程序
 培训的授权人员才可以进行安装和维修。
 Warning: The installation and maintenance
 should be performed by the authorized
 person only



Danfoss Commercial Compressors



型号: MT64HM4DVE


 序列号: EC1006983516


产地法国
 380-400V 3~ 50 Hz
 460V 3~ 60 Hz
 额定电流: 6A 最大工作电流: 14A
 过热保护
 低压倒
 最高额定压力 18.4 bar
 最高额定温度 50 °C
 最低额定温度 -35 °C

润滑油: MINERAL OIL 160 P



R134a 制冷剂: R22 或 R417A 仅和 160PZ



WARNING

Installation and servicing shall be performed by trained personnel only. Failure to observe these safety warnings could result in personal injury or death.
 1. Before working on the compressor, turn off power before removing the charge of capacitors.
 2. Never connect power in place and securely fastened whenever power is applied to the compressor. Use this equipment on a grounded system only.
 3. The system contains refrigerant and oil under pressure. Release pressure from both the high and low side before servicing under safety conditions.
 4. Do not touch the hot surface of the compressor.



CAUTION

Use only manufacturer's approved refrigerants, lubricants, and electrical components. Unauthorized refrigerants / lubricant / electrical component could cause fire, explosion, electrical shorting.
 For details refer to multi language instruction and technical documents available on Danfoss website at www.danfoss.com



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO

CLE, P/COLLECTEUR, 9623, COMAP, Clé 24, Clé pour raccord collecteur

Category: Plomberie

written by www.mbsm.pro | 23 March 2021



Clé pour raccord collecteur







Private Picture Copyright : WWW.MBSM.PRO



Fiche Technique, Samsung RT30GBTS, Algérie, Caractéristiques, Réfrigérateurs, 300Lt, no-frost, 600×621×1560, R134a, 160G, 135W, Compressor 1/6HP

Category: Technologie

written by www.mbsm.pro | 23 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Fiche Technique Réfrigérateur Samsung RT30GBTS

Marque	Samsung
Réfrigérateur	RT30GBTS
Catégorie	2 Portes
Capacité Totale	370 Litres
Capacité Réfrigérateur	Litres

Capacité Congélateur	Litres
Capacité de congélation	
Autonomie du congélateur	
Largeur	60 Cm
Hauteur	157 Cm
Profondeur	64 Cm
Poids	61
Nombre de tiroirs Réfrigérateur	1
Nombre d'étagères Réfrigérateur	2
Nombre de tiroirs Congélateur	0
Nombre d'étagères Congélateur	1
Accessoires inclus	Aucun
Réfrigérant	R134a
Caractéristiques particulières	Aucune
Nombre de portes	2
Position du congélateur	En haut
Couleur	Blanc
Dégivrage Automatique	18
Congélation rapide	19

SPECIFICATION

RT30GB	
CAPACITY	300 LT 10.60 CFT
DIMENSION	W 600 MM
	D 621 MM
	H 1,560 MM
WEIGHT	51.9 Kg
REFRIGERANT R-134a	160 g
VOLTAGE	220V / 50Hz
AMPERE	0.90 A
POWER	120 W

MADE IN ALGERIA
DA99-C1792F

Private Picture Copyright : WWW.MBSM.PRO

Specification						
Model	RT30		RT34		RT37	
	RT30MA	RT30MB	RT34MA	RT34MB	RT37MA	RT37MB
Dimension(WxDxH) mm.	600x640x1560	600x610x1560	600x640x1630	600x610x1630	600x690x1630	600x660x1630
Gross Capacity	264 liter		281 liter		314 liter	
Net Capacity	259 liter		275 liter		306 liter	
Rated Voltage	230-240 V~					
Rated Frequency	50 Hz					
Rated Input	135W					
Rated Current	0.6A					
Defrosting Input(W/A)	150W/0.63A					
Climatic Class of The Appliance	N					
Rated Maximum Input of Lamp	15W					
Refrigerant	HFC-134a(160g)					
Mass	58.5 Kg		60 Kg		63 Kg	
Power Consumption	1.16kwh/24hr		1.25kwh/24hr		1.33kwh/24hr	
Freezing Capacity	4.8kwh/24hr					

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Samsung-1Télécharger

Mbsm_dot_pro_private_PDF_SamsungTélécharger

Hitachi Compressor, LBP, R134a, FL1152-RG, 1/6 Hp, 155W, série R012

Category: compressor

written by www.mbsm.pro | 23 March 2021

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO

HITACHI FL1152-RG

220V 50/60Hz OIL 2010.04.27



SERIAL NO. 00542 HFC-134a

⚠ WARNING | HIGH TEMPERATURE
ELECTRIC SHOCK
DO NOT TOUCH H24

60Hz	FL1462-P*	6.2	180	154	615	350	St	RSR	10.5	200	
	FL1462-P*	6.2	210	180	717	310	St	RSCR	11.8	216	
	FL1568-P*	6.8	210	180	717	310	St	RSCR	11.5	217	
	FL1675-P*	7.5	233	200	795	300		OC	RSR	10.8	216
	FL1875-P*	7.5	225	193	768	300		OC	RSR	11.9	211
	FL1875-P*	7.5	255	219	871	300		OC	RSCR	11.9	216
	FL0634-U*	3.4	98	84	335	270	St	RSR	8.3	179	
	FL0739-U*	3.9	114	98	389	270	St	RSR	8.3	179	
	FL1052-U*	5.2	147	126	502	270	St	RSR	8.1	179	
127V	FL1152-U*	5.2	155	133	529	240	St	RSR	9.0	180	
60Hz	FL1262-U*	6.2	173	148	591	320	St	RSR	9.8	195	
	FL1462-U*	6.2	180	154	615	350	St	RSR	10.5	200	
	FL1568-U*	6.8	208	178	710	310	St	RSCR	11.5	216	
	FL1568-U*	6.8	228	196	778	310	St	RSR	10.5	200	
	FL1875-U*	7.5	225	193	768	300		OC	RSR	11.1	216
200V	FL1875-T*	7.5	200	232	172	683	300	OC	IR	11.1	211
50/60Hz	FL2088-T*	8.8	263	290	226	898	300	OC	IR	11.1	211
	FL0634-R*	3.4	98	84	335	270	St	RSR	8.0	179	
	FL0739-R*	3.9	115	99	393	270	St	RSR	8.0	179	
	FL0845-R*	4.5	122	105	417	240	St	RSR	8.7	180	
220V	FL1052-R*	5.2	150	129	512	240	St	RSR	8.9	180	
60Hz	FL1152-R*	5.2	155	133	529	270	St	RSR	8.1	179	
	FL1262-R*	6.2	162	139	553	320	St	RSR	9.8	195	
	FL1462-R*	6.2	207	178	707	300	St	RSR	10.6	196	
	FL1568-R*	6.8	228	196	778	310	St	RSR	10.5	200	
	FL1568-R*	6.8	181	155	618	300	St	RSCR	11.5	216	
	FL1875-R*	7.5	238	204	813	300		OC	RSR	11.1	216
	FL0634-S*	3.4	95	82	324	240	St	RSCR	9.0	180	
	FL0634-S*	3.4	82	70	280	270	St	RSR	7.8	179	
	FL0734-S*	3.4	95	82	326	240	St	RSCR	9.0	180	

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_FL1152-RGTélécharger

Mbsm.pro, PDF, Compressor, Hitachi, FL 0739 (90 Watts), FL 0847 (105 Watts), FL 1152 (125 Watts), FL 1257 (150 Watts), FL 1462 (165 Watts), FL 1675 (185 Watts), FL 1888 (210 Watts), FL 2088 (250 Watts)

Category: Files

written by www.mbsm.pro | 23 March 2021





Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_FL1462-SA_Hitachi-catalogueTélécharger

Mbsm_dot_pro_private_PDF_FL1462-

SA_Mbsm_dot_pro_private_PDF_P_COM008_105_spec-1Télécharger