


Installation de mitigeur de douche Jacousie encastré

Category: Plomberie

written by www.mbsm.pro | 27 April 2020

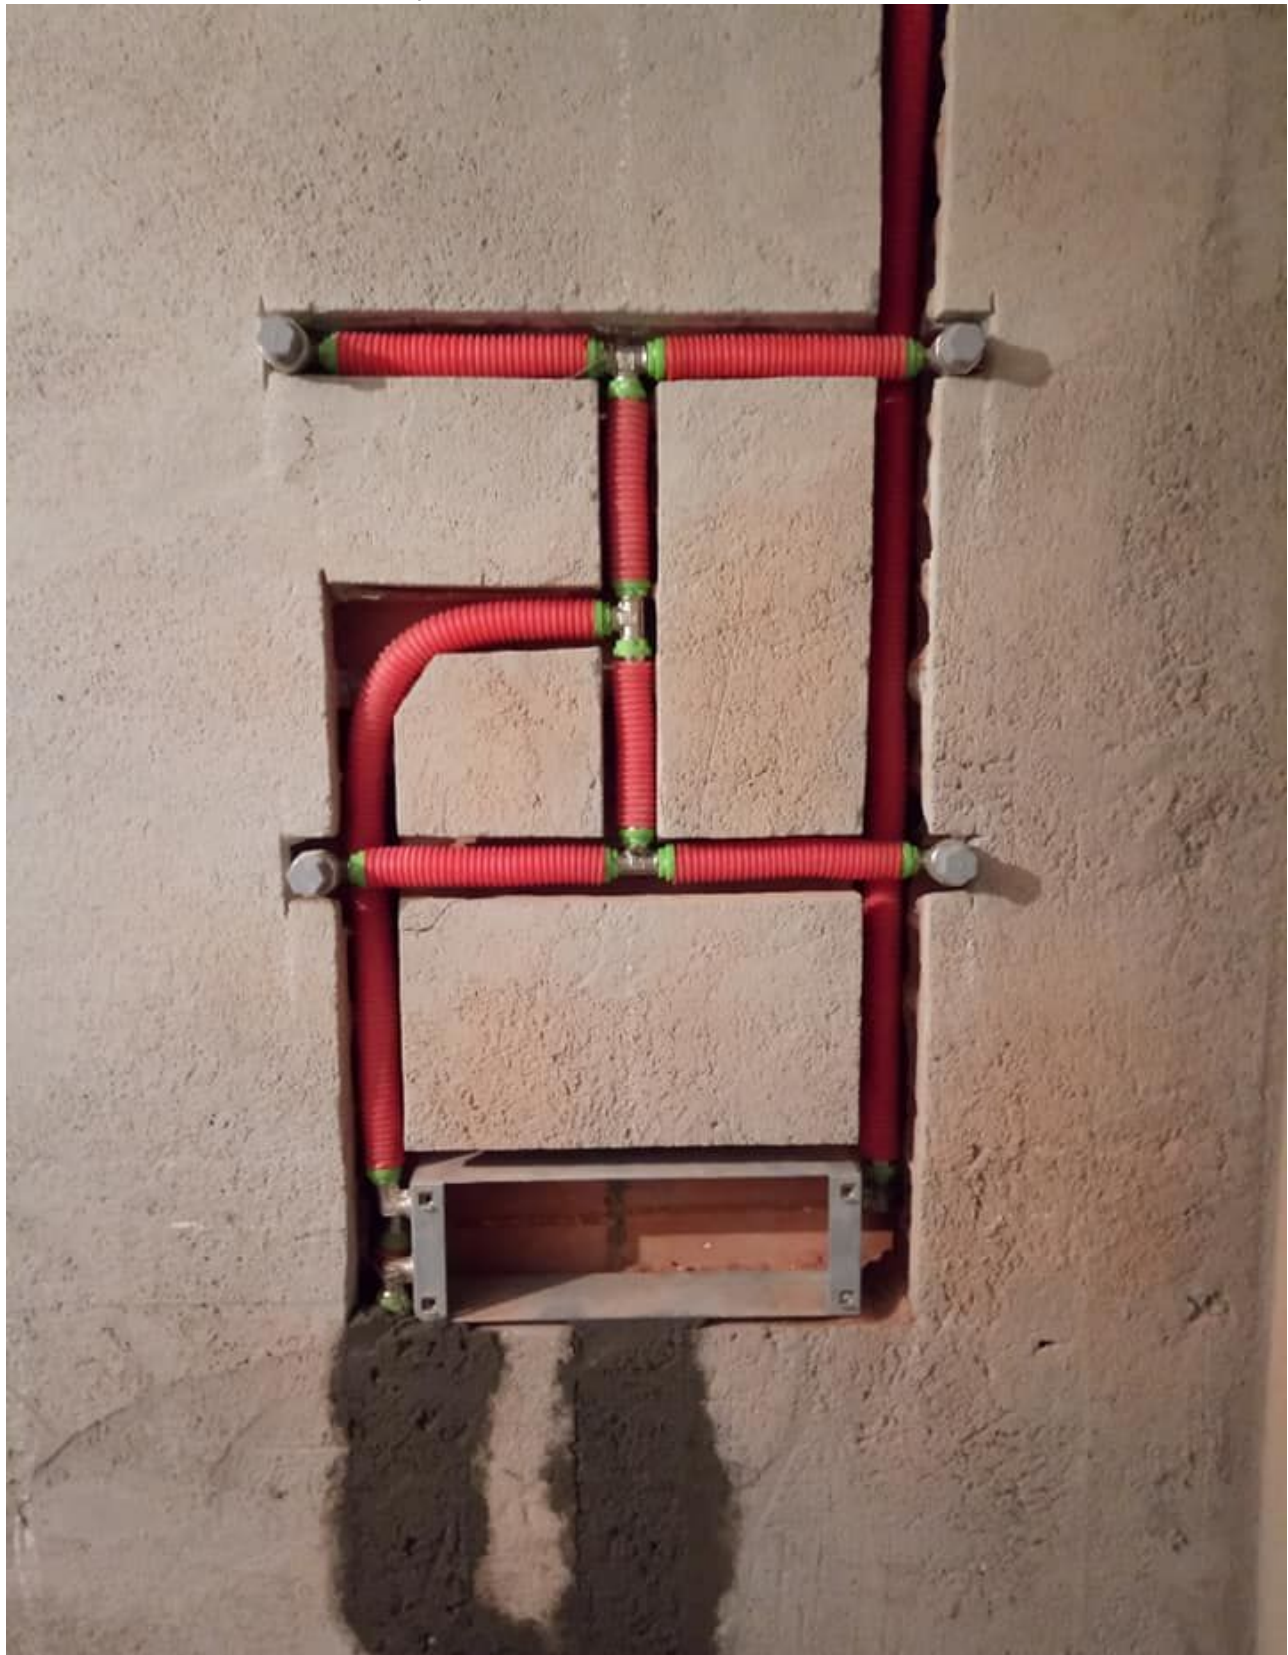


PictureS Mbsm Dot Pro : www.mbsm.pro

Les artistes de plomberie et chauffage central

ZEL , Refrigeration ,Compressor
,Gml200a ,152w , 1/5 Hp
,220/240V/50Hz ,R134a

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020

MADE IN EGYPT



unionaire SPECIFICATIONS

MODEL	RD 310
REFRIGERANT AMOUNT	R134a / 100g
RATED INPUT OF LAMP	15 W
RATED VOLTAGE	220-240V~
RATED CURRENT	1.1A
RATED FREQUENCY	50Hz
CLIMATE CLASS	T
POWER INPUT	130 W
GROSS VOLUME	310 L
CAPACITY (NET)	290 L
GROSS VOLUME cabinet	227
Net volume cabinet	210
PRODUCTION DATE	JULY/2108

Private Picture Copyright : WWW.MBSM.PRO

ZEL , Refrigeration , Compressor , Gml200a , 152w , 1/5 Hp , 220/240V/50Hz , R134a

HFC refrigerant , hydrofluorocarbons , is the third generation, of fluorinated refrigerants

Category: Technologie

written by www.mbsm.pro | 27 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

HFC refrigerant (hydrofluorocarbons) is the third generation of fluorinated refrigerants. Recognized as Ozone Depleting Potential (ODP) and Global Warming Potential (GWP), they represent a greener alternative to CFC and HCFC. Refrigerants in this group are applicable to refrigeration plants and air conditioning units designed specifically for their use. In addition, they can serve as drop-in replacements for older CFCs and HCFCs. The HFC group includes the following products:

R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON M059)
R422A (ISCEON M079)
R422D (ISCEON M029)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON M049Plus)
R438A (ISCEON M099)
R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON M089
R1234yf

مركبات الهيدروفلوروكربون) هي الجيل الثالث من المبردات المفلورة (HFC (GWP) وإمكانية الاحترار العالمي (ODP) معترف بها على أنها إمكانات استنفاد الأوزون . فهي تمثل بديلاً أكثر خضرة لمركبات الكربون الكلورية فلورية ومركبات الكربون الهيدروكلورية فلورية. تنطبق المبردات في هذه المجموعة على محطات التبريد ووحدات تكييف الهواء المصممة خصيصاً لاستخدامها. بالإضافة إلى ذلك ، يمكن أن تكون بمثابة بدائل منسدة لمركبات الكربون الكلورية فلورية ومركبات الكربون الهيدروكلورية فلورية القديمة.

:المنتجات التالية HFC تتضمن مجموعة

R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON M059)
R422A (ISCEON M079)
R422D (ISCEON M029)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON M049Plus)
R438A (ISCEON M099)

R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON M089
R1234yf

Le réfrigérant HFC (hydrofluorocarbures) est la troisième génération de réfrigérants fluorés. Reconnus comme potentiel d'appauvrissement de la couche d'ozone (ODP) et potentiel de réchauffement planétaire (GWP), ils représentent une alternative plus verte au CFC et au HCFC. Les réfrigérants de ce groupe sont applicables aux installations de réfrigération et aux unités de climatisation conçues spécifiquement pour leur utilisation. De plus, ils peuvent servir de remplacements directs pour les CFC et HCFC plus anciens.

Le groupe HFC comprend les produits suivants:

R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON M059)
R422A (ISCEON M079)
R422D (ISCEON M029)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON M049Plus)
R438A (ISCEON M099)
R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON M089
R1234yf






PictureS Mbsm Dot Pro | www.mbsm.pro

HERMETIC ,AW5524EK ,Compressor ,
20,950 BTU ,230/1/60 R-22 ,: 220-240
V/50 Hz. , 1 Phase , 1.7458333333 TON

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020

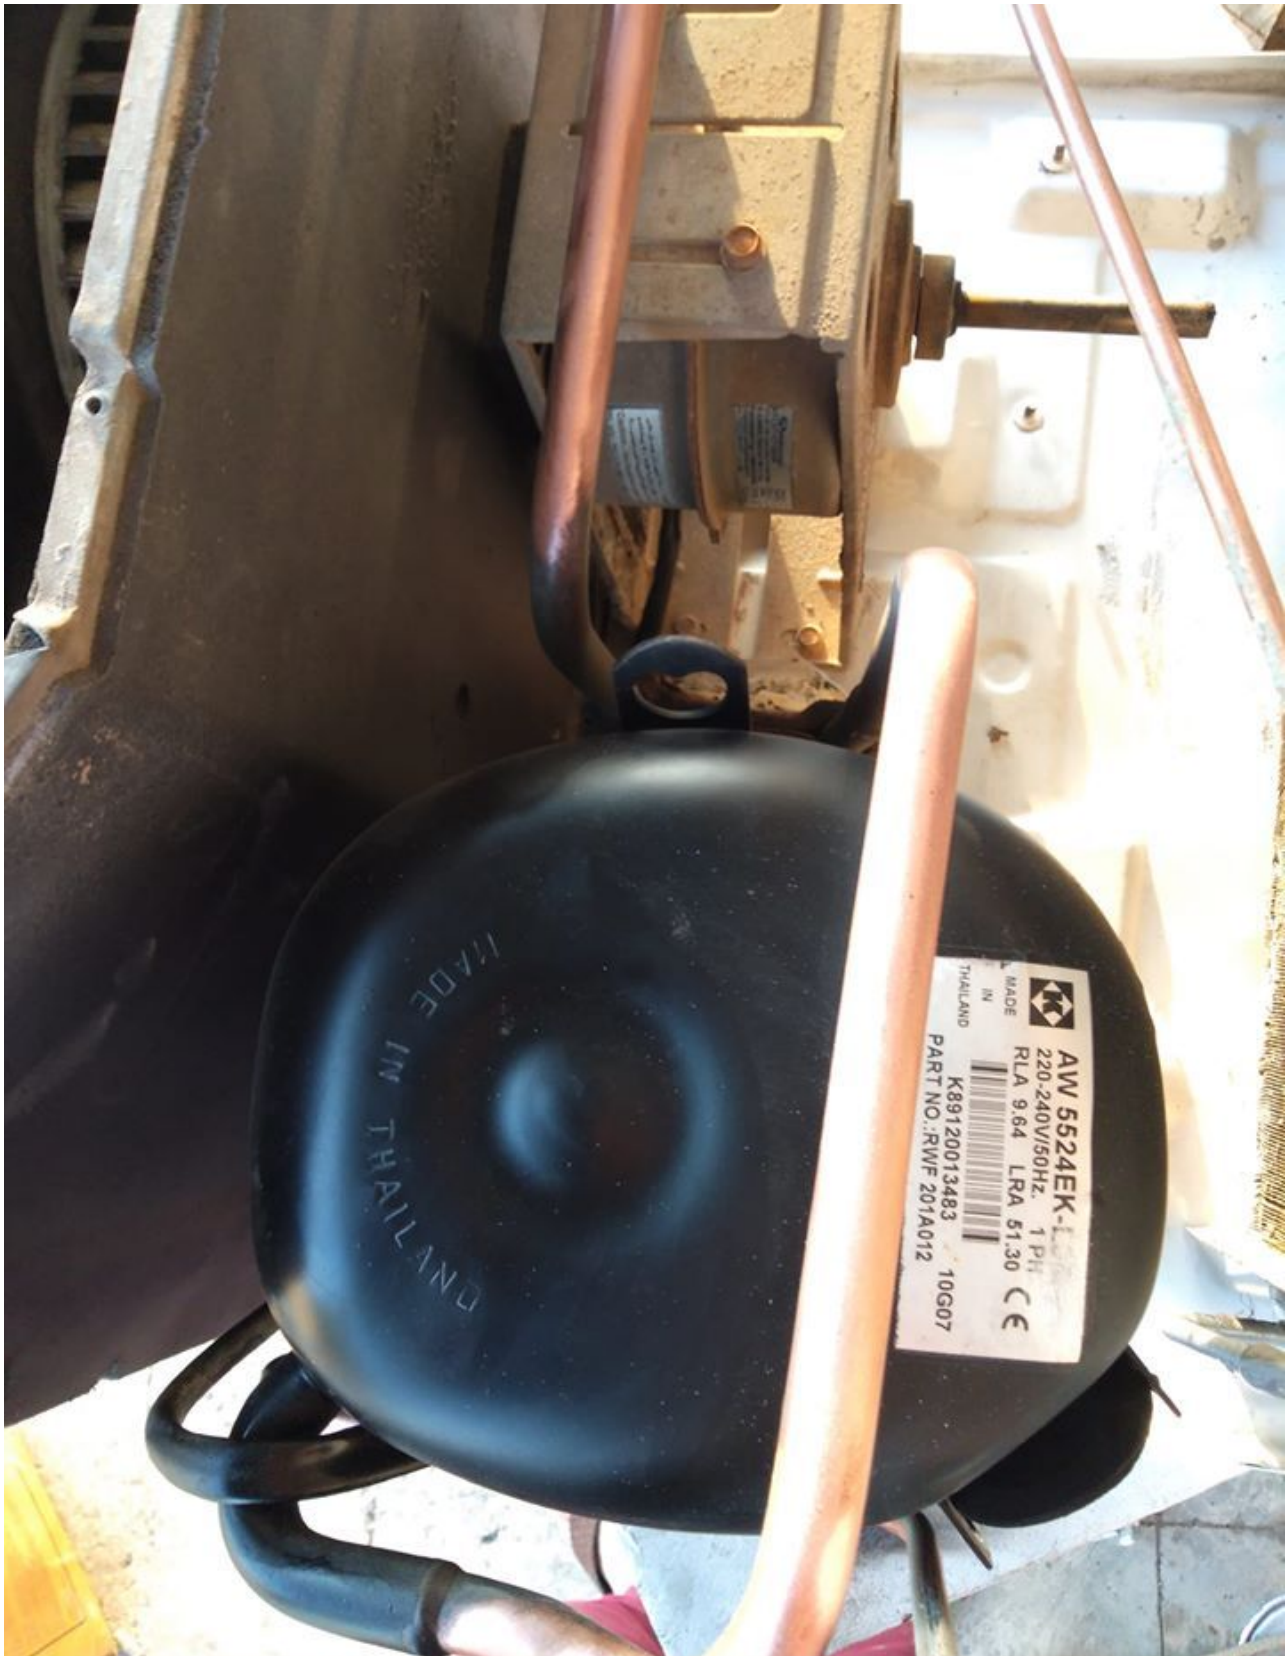

PictureS Mbsm Dot Pro : www.mbsm.pro

Electrical : 220-240 V/50 Hz. 1 Phase
Nominal Performance
Capacity 6,140 / – Watts
20,950 / – BTU/Hr
5,280 / – Kcal/Hr
Power Input 2,089 / – Watts
Locked Rotor Amps 51.30 / – Amps

Max Continuous Current – / – Amps

Rated Load Amps 9.64 / – Amps

COP 2.94 / – Watts / Watts

EER 10.03 / – BTU/W-Hr

Testing Conditions

Condensing Temperature 54.40 °C 129.9 °F

Evaporating Temperature 7.20 / – °C 45.0 / – °F

Liquid Temperature 46.10 °C 115.0 °F

Return Gas Temperature 35.00 °C 95.0 °F

Ambient Temperature 35.00 °C 95.0 °F

Application

Evaporating Temp. Range HBP, A/C @ 0.00 ° C to 13.00 ° C
(32.0° F to 55.4° F)

Heat Pump -23.30 ° C to 13.00 ° C
(-9.9° F to 55.4° F)

Refrigerant R22

Refrigerant Flow Control Capillary Tube

Compressor Cooling Fan

Compressor and Motor data

Compressor Type Reciprocating

Displacement 43.10 cc.

Oil Type Mineral Oil

Oil Charge 964 cc.

Motor Type P.S.C ; 2 Pole 2,850 / – r/m

Voltage Range 198-264/- Volts 50/- Hz.

Winding Resistance at 25 ° C

Start 2.52 Ohms

Run 1.24 Ohms

Weight with Oil 27.72 Kg.

Weight with Oil and Accessories 28.05 Kg.

Electrical Components

Motor Protector

Type Internal Overload

Model Number 4042KGE661-2

Open / Close 125-135 / 50-70 ° C

1st Cycle trip at 25 ° C 50.00 Amps(main) 30.00 Amps(start)

Motor Starter

Type Potential Relay

Model Number 4043KGE681-4(RVA3G6D)

Pick Up (max.) 180.00-195.00 Volts

Drop Out (min.) 40.00-90.00 Volts

Terminal Cover KGM 901-3

Start Capacitor 88-106 µF 330 VAC.

Disch Resistor for Start Cap –

Run Capacitor 45 µF 370/440 VAC.

Mounting Kit

Rubber Grommet 4007KGM905-2

Sleeve Grommet 4023KGM903-2

Washer –

Since we are constantly improving our product , the

specification are subject to change without notice.
REV. DATE C / N No.
ECN 01-04-14 ECN 0515/13





dot Pro : www.mbsm.pro

DOCUMENTATION PDF

Mbsm_dot_pro_private_pictureAW5524EKTélécharger

Austria , RECIPROCATING , COMPRESSOR , SECOP , HXD30AA , 0.04 1/25 HP , R600a , 220v 50Hz

Category: Technologie, Tester ok

written by www.mbsm.pro | 27 April 2020



Picture5 Mbsm Dot Pro : www.mbsm.pro

Austria ,RECIPROCATING ,COMPRESSOR ,SECCOP ,0.04 HP ,HXD30AA , 1/25 HP ,R600a ,
220v 50Hz

HUAYI ,COMPRESSOR , HYE55YL63 ,1/6 Hp , 129Kcal ,R134a, 220V ,LBP

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

HUAYI ,COMPRESSOR , HYE55YL63 ,1/6 Hp , 129Kcal ,R134a, 220V ,LBP

Tropical Compressor ,TLS5FT 102G4524
, SECOP , R134a , 1/6 HP , 134 W ,
LBP , 220/ 240 V 50Hz

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

Tropical Compressor ,TLS5FT 102G4524 , SECOP , R134a , 1/6 HP , 134 W , LBP , 220/ 240 V 50Hz

LOW BACK PRESSURE ,HITACHI ,
Compressor FL1257-SR , 1/5HP , R134a
,135 W , BTU/Hr 512 ,Curcuit RSIR

Category: Solutions,Tester ok
written by www.mbsm.pro | 27 April 2020


HITACHI FL1257-SD

220-240V 50Hz OIL 2006.05.13



SERIAL NO.09760

HFC-134a



WARNING HIGH TEMPERATURE
ELECTRIC SHOCK

K12

DO NOT TOUCH



SHOT ON M6T
MEIZU

PictureS Mbsm Dot Pro : www.mbsm.pro

LOW BACK PRESSURE ,HITACHI , Compressor FL1257-SR , 1/5HP , R134a ,135 W ,
BTU/Hr 512 ,Curcuit RSIR

Notion , Ne jamais utiliser de , pâte
à joints, ni Téflon, ni filasse pour
, l'étanchéité des raccords , de
Climatisation

Category: Solutions, Tester ok
written by www.mbsm.pro | 27 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

Notion , Ne jamais utiliser de , pâte à joints, ni Téflon, ni filasse pour , l'étanchéité des raccords , de Climatisation

Compressor Danfoss SC12CL 3/8 HP , LBP/MBP, R404A/R507

Category: Technologie,Tester ok

written by www.mbsm.pro | 27 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

Compressor Danfoss SC12CL 3/8 HP , LBP/MBP, R404A/R507