

LG, CSB075NJEG, 1/6HP, R600A, alu wire, refrigerator, compressor, refrigerator, BBS130, BBD230, BBC208S

Category: compressor

written by www.mbsm.pro | 12 April 2021

BUD-DCTAE166	19	CC125-BP	25	CPP330	280	DCPL137-2BG-ETP	33	DCTCE146	15	DF
BUD-DCTAE186	19	CC128-BB	25	CPP470	280	DCPL166-2BG	33	DCTCE147	15	DF
BUD-DCTAE187	19	CC128-BP	25	CPP650	280	DCPL167-2BG-ETP	33	DCTCE148	15	DF
BUD-DCTAE206	19	CC155-BB	25	CPP11000	175	DCPL167-2BG	33	DCTCE149	15	DF
BUD-DCTAE207	19	CC155-BP	25	CPP12000	175	DCPL167-2BG-ETP	33	DCTCE150	15	DF
BUD-DCTCE66	19	CC156-BB	25	CPP13000	175	DCPL166-2BD	33	DCTCE151	15	DF
BUD-DCTCE77	19	CC156-BP	25	CPP14000	175	DCPL166-2BD-ETP	33	DCTCE152	15	DF
BUD-DCTCE106	19	CC186-BB	25	CPP16000	175	DCPL166-2BG-ETP	33	DCTCE153	15	DF
BUD-DCTCE107	19	CC186-BP	25	CPP19000	175	DCPL167-2BG	33	DCTCE154	15	DF
BUD-DCTCE128	19	CCA	337	CRPSA	175	DCPL167-2BG	33	DCTCE155	15	DF
BUD-DCTCE127	19	CDD1/1	171	CRP20	175	DCPL167-2BG	33	DDBF	164, 240	DF
BUD-DCTCE146	19	CDD1/2	171	CS6/10	15, 15	DCPL167-2BG	33	DE350	38	DF
BUD-DCTCE147	19	CDD1/3	171	CS/10	15, 15	DCPL167-2BG-ETP	33	DECEFA	38	DF
BUD-DCTCE157	19	CDD1/4	171	CS70	235	DCPL186-2BD	33	DECEFA	38	DF
BUD-DCTCE166	19	CDD1/6	171	CSB075NJEG	235	DCPL186-2BD-ETP	33	DECEFA	38	DF
BUD-DCTCE167	19	CDD2/1	171	CSR/16	48	DCPL186-2BG	33	DECEFA	38	DF
BUD-DCTCE186	19	CDD2/3	171	CSR/18	48	DCPL186-2BG-ETP	33	DEF	44	DF
BUD-DCTCE187	19	CD-GH-818	137	CSR/20	48	DCPL187-2BD	33	DEL-0500	343	DF
BUD-DCTCE206	19	CDR-1	90, 229	CT 1758TD	113	DCPL187-2BD-ETP	33	DESSUS-TH168	361	DF
BUD-DCTCE207	19	CDR-2	90, 229	CT 1760TD	113	DCPL187-2BG	33	DESSUS-TH207	361	DF
BUD-ETPL83	63	CF4-78ET	339	CTR11000	175	DCPL187-2BG-ETP	33	DEV-FIC	21, 305	DF
BUD-ETPL84	63	CF4-78GP	338	CTR12000	175	DCPL206-2BD	33	DIFP90BI	88	DF
BUD-ETPL103	63	CF0380-37	388	CTR13000	175	DCPL206-2BD-ETP	33	DIFP90BL	88	DF
BUD-ETPL104	63	CF0380-50	388	CTR14000	175	DCPL206-2BG	33	DIFP90R	88	DF
BUD-ETPL123	63	CH11000	171	CTR16000	175	DCPL206-2BG-ETP	33	DIFP90VE	88	DF
BUD-ETPL124	63	CH12000	171	CTR19000	175	DCPL207-2BD	33	DIFP90YE	88	DF
BUD-ETPL143	63	CH13000	171	CTR21000	175	DCPL207-2BD-ETP	33	DIPA	163	DF
BUD-ETPL144	63	CH14000	171	CTRE11000	175	DCPL207-2BG	33	DIPA600	163	DF
BUD-ETTU104	63	CH16000	171	CTRE12000	175	DCPL207-2BG-ETP	33	DIST91	94	DF
BUD-ETTU124	63	CH21000	171	CTRE13000	175	DCPLV128-1BD	37	DIST91A	94	DF

Private Picture Copyright : WWW.MBSM.PRO

- + CSB057NJEG 1 / 10HP
- + CSB069NJEG 1 / 8HP
- + CSB075NJEG 1 / 6HP



2021/4/8 18:32

BUD-DCTAE167	19	CC125-BP	25	CPP330	280	DCPL166-2BD-ETP	33	DCTCE146	15	DF
BUD-DCTAE186	19	CC128-BB	25	CPP470	280	DCPL166-2BD	33	DCTCE147	15	DF
BUD-DCTAE187	19	CC128-BP	25	CPP650	280	DCPL167-2BD-ETP	33	DCTCE148	15	DF
BUD-DCTAE206	19	CC155-BB	25	CPP11000	170	DCPL167-2BG	33	DCTCE157	15	DF
BUD-DCTAE207	19	CC155-BP	25	CPP12000	170	DCPL167-2BG-ETP	33	DCTCE166	15	DF
BUD-DCTCE66	19	CC156-BB	25	CPP13000	170	DCPL166-2BD	33	DCTCE167	15	DF
BUD-DCTCE77	19	CC156-BP	25	CPP14000	170	DCPL166-2BD-ETP	33	DCTCE168	15	DF
BUD-DCTCE106	19	CC186-BB	25	CPP16000	170	DCPL166-2BG	33	DCTCE187	15	DF
BUD-DCTCE107	19	CC186-BP	25	CPP19000	170	DCPL166-2BG-ETP	33	DCTCE188	15	DF
BUD-DCTCE128	19	CCA	337	CRP5A	170	DCPL167-2BD	33	DCTCE189	15	DF
BUD-DCTCE127	19	CDD1/1	171	CRP20A	170	DCPL167-2BG	33	DDBF183	164,240	DF
BUD-DCTCE146	19	CDD1/2	171	CS6/10	15,350	DCPL167-2BG-ETP	33	DDBF184	164,240	DF
BUD-DCTCE147	19	CDD1/3	171	CS/10	15,350	DCPL167-2BG-ETP	33	DE35180	38,115	DF
BUD-DCTCE157	19	CDD1/4	171	CS70	232	DCPL166-2BD	33	DEF183A	380,115	DF
BUD-DCTCE166	19	CDD1/6	171	CSB075NJEG	235	DCPL186-2BD-ETP	33	DECEFI14-PM	44	DF
BUD-DCTCE167	19	CDD2/1	171	CSR/16	48	DCPL186-2BG	33	DECEP-PM	44	DF
BUD-DCTCE186	19	CDD2/3	171	CSR/18	48	DCPL186-2BG-ETP	33	DEF	44	DF
BUD-DCTCE187	19	CD-GH-818	137	CSR/20	48	DCPL187-2BD	33	DEL-0500	343	DF
BUD-DCTCE206	19	CDR-1	90,229	CT 1758TD	113	DCPL187-2BD-ETP	33	DESSUS-TH168	361	DF
BUD-DCTCE207	19	CDR-2	90,229	CT 1760TD	113	DCPL187-2BG	33	DESSUS-TH207	361	DF
BUD-ETPL83	63	CF4-78ET	339	CTR11000	175	DCPL187-2BG-ETP	33	DEV-FIC	21,305	DF
BUD-ETPL84	63	CF4-78GP	338	CTR12000	175	DCPL206-2BD	33	DIFP90BI	88	DF
BUD-ETPL103	63	CF0380-37	388	CTR13000	175	DCPL206-2BD-ETP	33	DIFP90BL	88	DF
BUD-ETPL104	63	CF0380-50	388	CTR14000	175	DCPL206-2BG	33	DIFP90R	88	DF
BUD-ETPL123	63	CH11000	171	CTR16000	175	DCPL206-2BG-ETP	33	DIFP90VE	88	DF
BUD-ETPL124	63	CH12000	171	CTR19000	175	DCPL207-2BD	33	DIFP90YE	88	DF
BUD-ETPL143	63	CH13000	171	CTR21000	175	DCPL207-2BD-ETP	33	DIPA	163	DF
BUD-ETPL144	63	CH14000	171	CTR11000	175	DCPL207-2BG	33	DIPA600	163	DF
BUD-ETTU104	63	CH16000	171	CTRE12000	175	DCPL207-2BG-ETP	33	DIST91	94	DF
BUD-ETTU124	63	CH21000	171	CTRE13000	175	DCPLV128-1BD	37	DIST91A	94	DF

Private Picture Copyright : WWW.MBSM.PRO

Pièces détachées

▼ PIÈCES DÉTACHÉES POUR ARRIÈRES DE BAR

DÉSIGNATION	REF.	€	DÉSIGNATION	REF.	€
Compresseurs					
Compresseur LG modèle CMA098NHEM (R600A) pour BBT350, BBC330S	CMA098NHEM	266	Joint de porte pour BBD230, BBT350	BBT350L.28	8,80
Compresseur LG modèle CSB075NJEG (R600A) pour BBS130, BBD230, BBC208S	CSB075NJEG	153	Joint de porte pour BBS130	BBS130L.25	14,40
Condenseurs					
Condenseur pour BBC208S, BBD230	BBD230L.08	59	Portes vitrées		
Condenseur pour BBC330S, BBT350	BBT350L.09	53	Porte vitrée battante droite pour BBD230, BBT350	BBD230L.25.1	222
Condenseur pour BBS130	BBS130L.07	59	Porte vitrée battante gauche pour BBD230, BBT350	BBD230L.25	222
Évaporateurs					
Évaporateur pour BBC208S	BBD230S.47	117	Porte vitrée battante pour BBS130	BBS130L.24	222
Évaporateur pour BBC330S, BBT350	BBT350L.53	141	Porte vitrée coulissante pour BBC208S	BBD230S.26	205
Évaporateur pour BBS130	BBS130L.47	117	Porte vitrée coulissante avec serrure pour BBC208S	BBD230S.26.1	205
			Porte vitrée coulissante gauche pour BBC330S	BBT350S.26.1	222
			Porte vitrée coulissante droite pour BBC330S	BBT350S.26.3	222
			Porte vitrée coulissante milieu pour BBC330S	BBT350S.26.2	222
			Roulette pour porte coulissante pour BBC208S, BBC330S	BBD230S.26.01	1,70
			Thermostat DIXELL XR02CX pour BBS130, BBD230, BBT350, BBC208S, BBC330S	XR02CX	158

Private Picture Copyright : WWW.MBSM.PRO

Compressor, TEE, TURK ELEKTRIK , R600a, MTS200MT, MTS170MT, MTS185MT

Category: compressor

written by www.mbsm.pro | 12 April 2021



Private Picture Copyright : WWW.MBSM.PRO

Compressor, TEE, TURK ELEKTRIK , R600a, MTS200MT, MTS170MT, MTS185MT

Medium and High Back Pressure
Compressors, M/HBP, RSIR, TECUMSEH,
1/5++ HP, R134a, 160g, TWB1374YGS,
TW146GY, 220v/50-60, kiriazi defrost,
340L, k350, k350/1, Embraco,
ff17.5hak, tw146-gy-486, twb1374ygs

Category: compressor

written by www.mbsm.pro | 12 April 2021



Medium and High Back Pressure Compressors, M/HBP, RSIR, TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY, 220v/50-60, kiriazi defrost, 340L, k350, k350/1, Embraco, ff17.5hak, tw146-gy-486, twb1374ygs

LG rotary, compressor, model,
QJS222PMA, 12700BTU 5.6Amps, EER =
10.7, air conditioner

Category: compressor

written by www.mbsm.pro | 12 April 2021

QJS222PMA CONDENSERS

THERMALLY PROTECTED R22

1PH 50Hz 220-240 V ~ LRA 29

SERIAL NO. 0E1R1184ED23 - A00124



LG



MADE IN THAILAND

WARNING

Service should be performed by trained personnel only.



ELECTRIC SHOCK HAZARD

- Ground the equipment securely.
- Turn off the power before servicing.
- Retain Terminal Cover in position whenever power is applied to this compressor.



BURN HAZARD

- Do not touch the Compressor with bare hands during operation or after stoppage instantly.



EXPLOSION OR FIRE

- Wear safety goggles and gears as system contains oil and refrigerant under pressure.
- Do not compress air.
- Do not use refrigerant and lubricants besides those specified.
- Make sure to connect right way with valves.

SHOT ON MI 9T
AI TRIPLE CAMERA

2021/4/10 21:28

Private Picture Copyright: WWW.MBSM.PRO

LG rotary, compressor, model, QJS222PMA, 12700BTU 5.6Amps, EER = 10.7, air conditioner

Tecumseh, Copeland, Compressor, Cross, Reference, P12FW, Compressor, R-12, 1/3HP, 230V, HMBP, ACC-ELECTROLUX, CUBIGEL/HUAYI

Category: compressor

written by www.mbsm.pro | 12 April 2021



Private Picture Copyright : WWW.MBSM.PRO

Tecumseh, Copeland, Compressor, Cross, Reference, P12FW, Compressor, R-12, 1/3HP, 230V, HMBP, ACC-ELECTROLUX, CUBIGEL/HUAYI

Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

Category: compressor,Files

written by www.mbsm.pro | 12 April 2021

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.


Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.

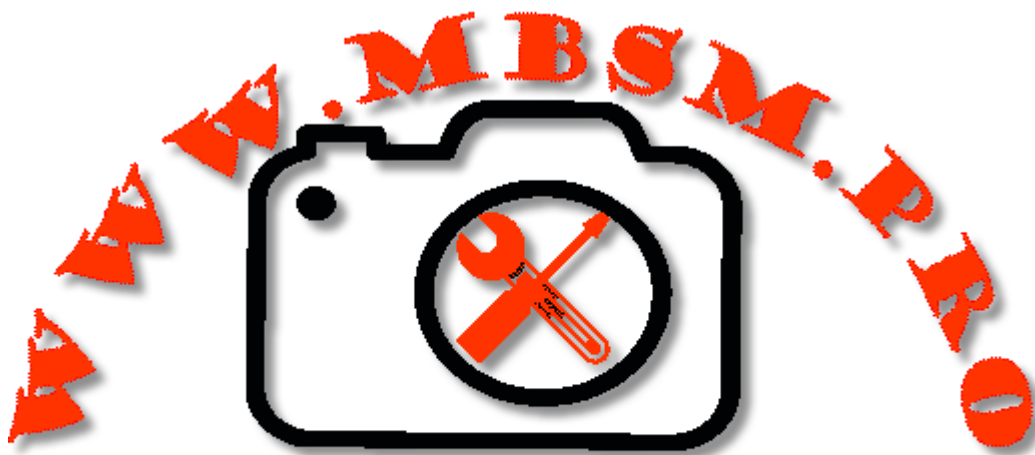

Private Picture Copyright : WWW.MBSM.PRO

Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.


Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.




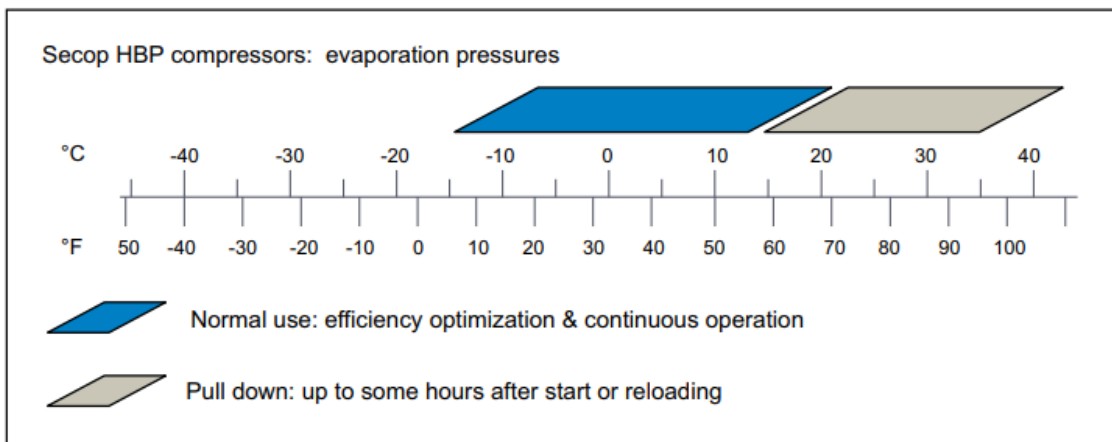


Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

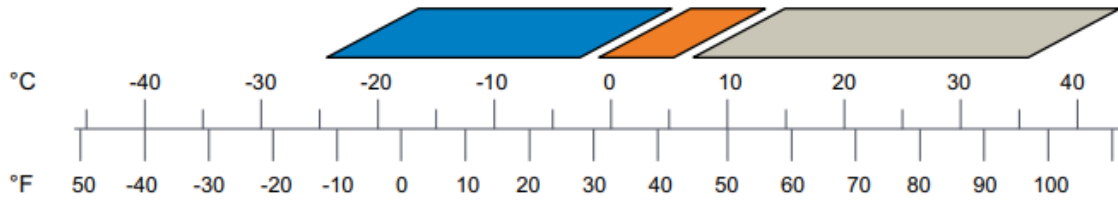Secop MBP compressors: evaporation pressures







-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: up to some hours after start or reloading



Private Picture Copyright : WWW.MBSM.PRO

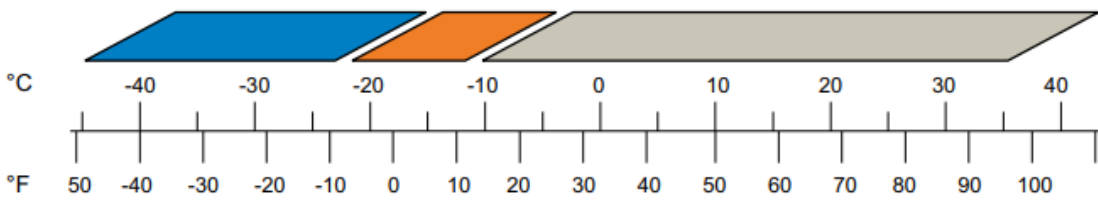Secop LBP compressors: evaporation pressures



-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: short time operation (<60min.) after start or defrost



Private Picture Copyright : WWW.MBSM.PRO

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

Category: compressor,Files

written by www.mbsm.pro | 12 April 2021



Private Picture Copyright : WWW.MBSM.PRO

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

[Mbsm_dot_pro_private_PDF_DANFOSS-FRCC.PK_.046.A1.02Télécharger](#)

[Mbsm_dot_pro_private_PDF_Danfoss_scroll_compressors_HXX_R410ATélécharger](#)

[Mbsm_dot_pro_private_PDF_DANFOSS-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_DANFOSSTélécharger](#)




Private Picture Copyright : WWW.MBSM.PRO

Specification for r-22 Compressor, Ph Rotary Models Specification, PH41VPJT, 2 Ton, Mitsubishi Rotary Compressor, 24000BTu

Category: compressor

written by www.mbsm.pro | 12 April 2021

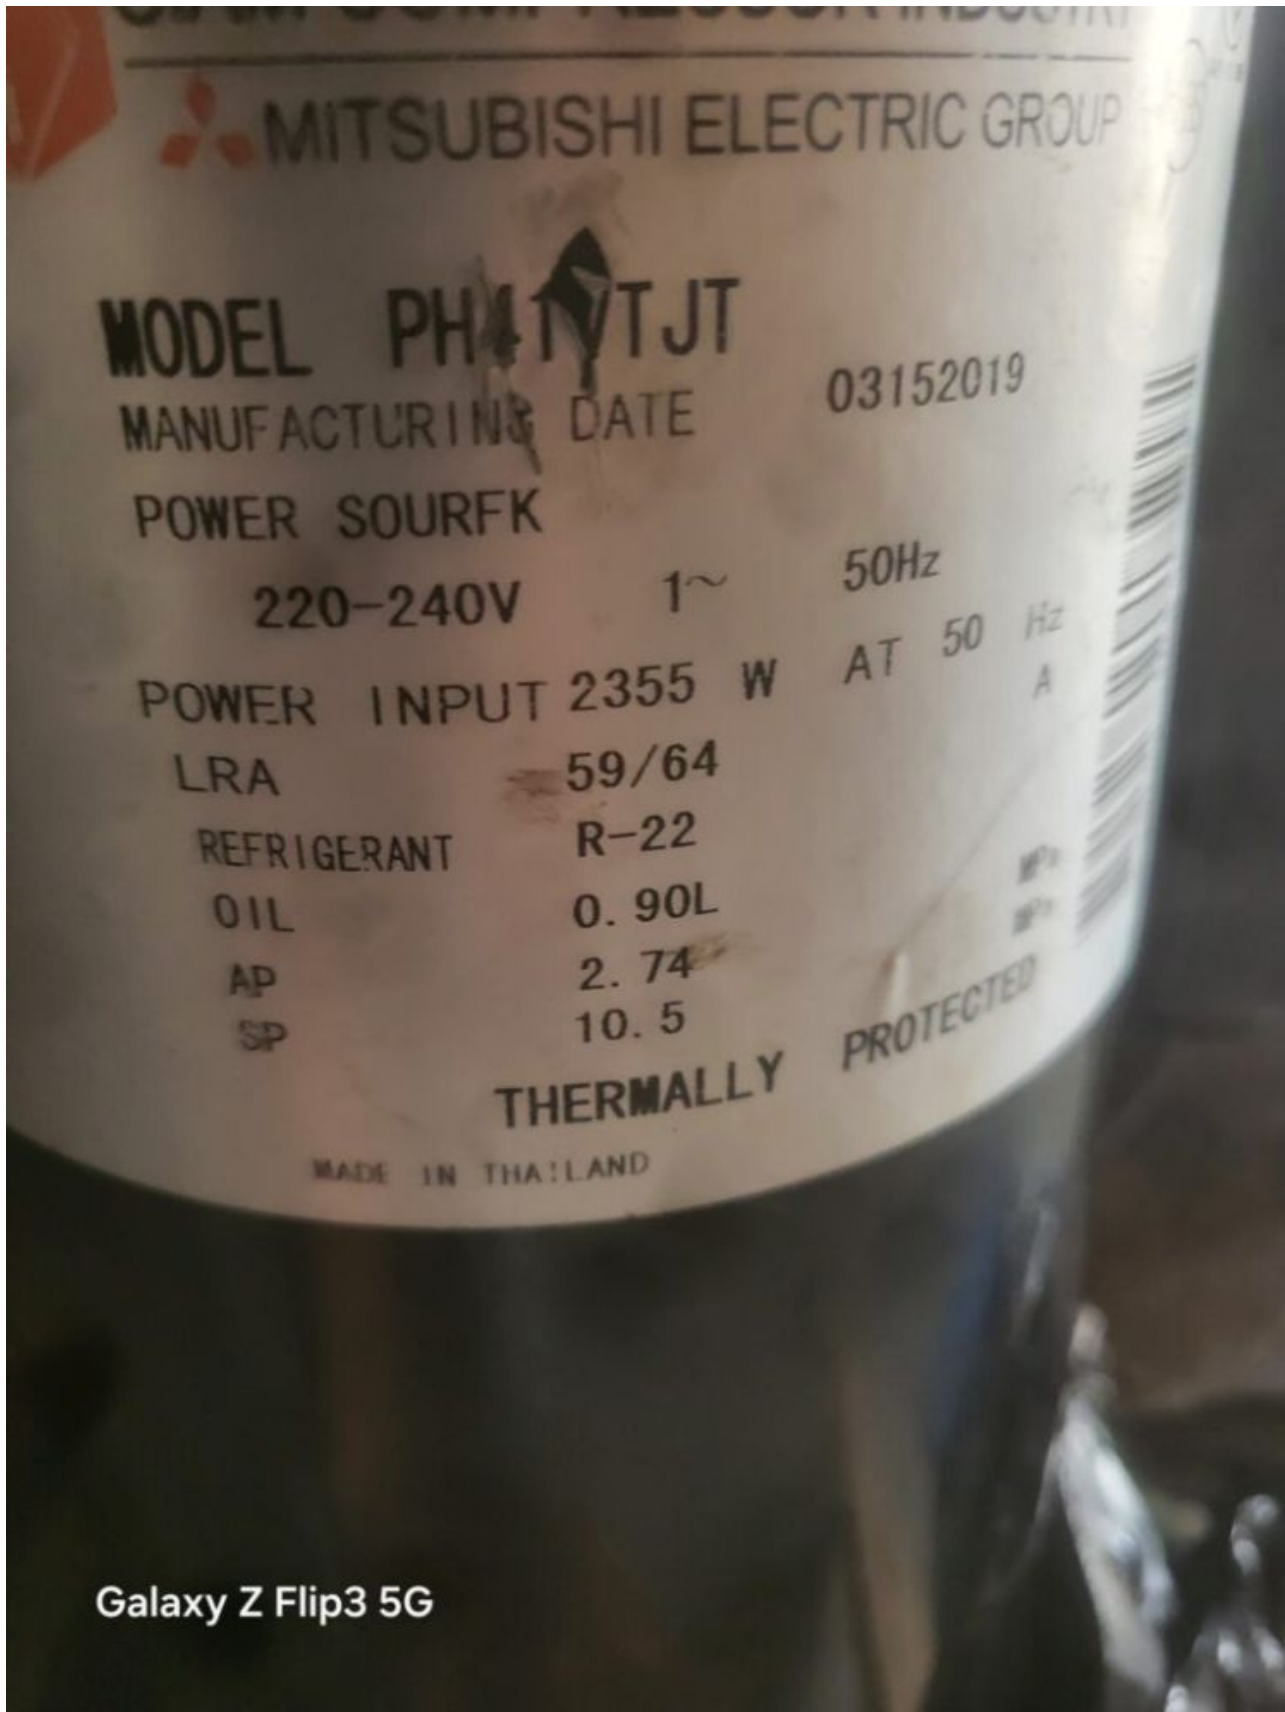

Galaxy Z Flip3 5G

Private Picture Copyright : WWW.MBSM.PRO

Product Specification

Horse Power

2 Ton

Brand

Mitsubishi

Compressor Technology

Rotary Compressor

Rental Available	No
Spares Available	No
Is It Portable	Yes
Installation/After Sales Service Available	No
Cylinder	1
Warranty	1 Year
Phase	Single
Weight	28 Kg
No. Of Cylinder	1
Cylinder Type	Round
Voltage	220 V
Material	Copper
Accessories	No
Application	AC
Color	Black



REFRIGERANT COMPRESSOR

MODEL PH41VPJT

DATE	28022004	PHASE	
VOLT AC	220-240		
FREQ.	50 Hz	L.R.A.	59/64 A
REFRIGERANT	R-22	OIL	MS-32N1
AP	28 Kg/cm^2	SP	84 Kg/cm^2



PH41VPJT A0019344AA

LICENSED BY MITSUBISHI ELECTRIC
SIAM COMPRESSOR INDUSTRY CO., LTD.

MADE IN
THAILAND

ZMC, zanussi, Made in Egypt, Compressors

Category: compressor

written by www.mbsm.pro | 12 April 2021

R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
<input type="checkbox"/> GL45AA	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
<input type="checkbox"/> GL45AN	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
<input type="checkbox"/> GL60AA	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
<input type="checkbox"/> GL60AF	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
<input type="checkbox"/> GL60AH	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
<input type="checkbox"/> GL60AN	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
<input type="checkbox"/> GL70AA	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
<input type="checkbox"/> GL70AN	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
<input type="checkbox"/> GL70AT	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
<input type="checkbox"/> GL75AA	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
<input type="checkbox"/> GL80AA	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
<input type="checkbox"/> GL80AF	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
<input type="checkbox"/> GL80AH	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
<input type="checkbox"/> GL80AN	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
<input type="checkbox"/> GL90AA	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
<input type="checkbox"/> GL90AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
<input type="checkbox"/> GL90AN	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
<input type="checkbox"/> GL90AT	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
<input type="checkbox"/> GL99AA	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
<input type="checkbox"/> GL99AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
<input type="checkbox"/> GL80AD	LBP::R134a	1/5	43	W	0	0	0	0		
<input type="checkbox"/> GL90AD	LBP::R134a	1/4	43	W	0	0	0	0		

R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE -23.3°C	CECOMAF -25°C	ASHRAE -23.3°C	CECOMAF -25°C	ASHRAE -23.3°C	CECOMAF -25°C
					kcal/h	W	W/W	W/W	W/W	W/W
▶ <input type="checkbox"/> GL45AA	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> GL45AN	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> GL60AA	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> GL60AF	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> GL60AH	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> GL60AN	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> GL70AA	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ <input type="checkbox"/> GL70AN	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> GL70AT	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> GL75AA	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> GL80AA	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> GL80AF	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> GL80AH	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> GL80AN	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> GL90AA	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> GL90AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> GL90AN	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> GL90AT	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ <input type="checkbox"/> GL99AA	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ <input type="checkbox"/> GL99AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> GL80AD	LBP::R134a	1/5	43	W	0	0	0	0		
▶ <input type="checkbox"/> GL90AD	LBP::R134a	1/4	43	W	0	0	0	0		

R12

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> L45AV	LBP::R12	1/8	43	B	221	192	0.91	0.71		
▶ <input type="checkbox"/> L55AV	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> L55BV	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> L76AV	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> L76BV	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> L88AV	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> L88BV	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> LT45AV	LBP::R12	1/8	50	B	94	83	1.04	0.83		
▶ <input type="checkbox"/> LT55AV	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> LT55BV	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> LT76BV	LBP::R12	1/5	50	B	155	137	1.14	0.91		
▶ <input type="checkbox"/> LT88BV	LBP::R12	1/4	50	B	190	169	1.16	0.93		
▶ <input type="checkbox"/> P12BW	LBP::R12	1/3	43	A	221	192	0.91	0.71		

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger

R600a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> HL80AH	LBP::R600a	1/7	43	A	104	89	1.37	1.06		
▶ <input type="checkbox"/> HL90AH	LBP::R600a	1/7	43	A	115	99	1.38	1.08		
▶ <input type="checkbox"/> HL99AH	LBP::R600a	1/6	43	A	120	103	1.34	1.03		

Private Picture Copyright: WWW.MBSM.PRO

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP _a 7.2 _a
					CECOMAF 5°C W	ASHRAE 7.2°C kcal/h	
					<input type="checkbox"/> GL45PB	HMBP::R134a	
<input type="checkbox"/> GL45PB	HMBP::R134a	1/6	0	300			
<input type="checkbox"/> GL45TB	HMBP::R134a	1/6	43	A			
<input type="checkbox"/> GL60PB	HMBP::R134a	1/5	43	A			
<input type="checkbox"/> GL60TB	HMBP::R134a	1/5	43	A			
<input type="checkbox"/> GL80PB	HMBP::R134a	1/5	43	A			
<input type="checkbox"/> GL80TB	HMBP::R134a	F	0	300			
<input type="checkbox"/> GL90TB	HMBP::R134a	1/4	43	A			
<input type="checkbox"/> GP12TB	HMBP::R134a	3/8	43	A			

Private Picture Copyright: WWW.MBSM.PRO

ALL COMPRESSOR HERMÉTIC EMBRACO IN ONE FILE

Category: compressor

written by www.mbsm.pro | 12 April 2021

COMPRESORES R404A/ R452A BAJA TEMPERATURA. MONOFÁSICAS 220V

MODELO	CM3	EXP	C.V	INT (A)	REFR COMP	MOTOR	TEMP. DE EVAPORACIÓN			PRECIO
							-10°C	-25°C	-30°C	
EMT2117GK	4,50	C	1/4	1,15	F	CSIR	408	210	164	143,00
EMT2121GK	5,20	C	1/3	1,33	F	CSIR	487	258	204	146,00
EMT2125GK	5,96	C-V	1/3	1,57	F	CSIR	562	301	238	158,00
EMT2130GK	6,76	C-V	1/2	1,70	F	CSIR	605	326	257	165,00
NEU2140GK	8,78	C-V	1/2	2,63	F	CSIR	801	421	326	182,00
NEU2155GK	12,11	C-V	3/4	3,79	F	CSIR	1067	557	432	201,00
NEU2168GJ	14,28	C-V	3/4	3,48	F	CSIR	1213	642	496	240,00
NEU2178GK	16,80	C-V	1	4,27	F	CSIR	1416	753	586	287,00
NT2180GK	20,44	C-V	1	3,12	F	CSIR	1573	814	625	330,00
NT2192GK	22,40	C-V	1	4,92	F	CSIR	1693	865	669	365,00
NT2192GK(r)	22,40	C-V	1	4,92	F	CSIR	1693	865	669	345,00
NT2210GK	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	375,00
NT2210GK(r)	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	355,00
NT2212GK	27,78	C-V	1 1/2	5,30	F	CSIR	2174	1125	876	380,00
NJ2212GK	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	419,00
NJ2212GK(r)	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	394,00



Private Picture Copyright: WWW.MBSM.PRO

EMT22HLP 3,00 C 1/12 0,44 S RSIR 151 69 50 98,00
 EMT36HLP 3,97 C 1/10 0,56 S RSIR 203 94 71 102,00
 EMY3111Z 4,85 C 1/8 0,71 S RSIR 247 117 86 105,00
 EMT49HLP 5,56 C 1/6 0,76 S RSIR 274 131 98 111,00
 EMY3115Z 6,76 C 1/6 0,99 S RSIR 341 158 117 112,00
 NEK1116Z 7,37 C 1/5 0,60 S RSIR 367 172 126 129,00
 NEK1118Z 8,39 C 1/4 0,74 S RSIR 417 195 144 133,00
 NE2121Z 9,26 C/V 1/4 1,41 F CSIR 465 217 163 172,00
 NE2130Z 12,11 C/V 1/3 2,07 F CSIR 613 298 227 186,00
 NE2134Z 14,28 C/V 1/3 2,30 F CSIR 662 313 234 190,00
 NEK2140Z 16,80 C/V 1/2 2,35 F CSIR 801 377 284 207,00
 MODELO CM3 EXP C.V INT

(A)

REFR

COMP MOTOR TEMP. DE EVAPORACIÓN PRECIO +5°C 0°C -5°C -10°C

EMT37HDP 3,40 C 1/8 0,85 S RSIR 343 245 228 181 113,00

EMT45HDR 3,97 C 1/8 0,95 S CSIR 402 284 229 184 121,00

EMT50HDP 4,50 C 1/6 1,05 S RSIR 456 374 303 242 120,00

EMT6144Z 5,20 C/V 1/5 1,38 F RSIR 549 395 367 294 123,00

EMT6160Z 6,76 C/V 1/4 1,74 F RSIR 696 504 469 377 127,00

EMT6170Z 7,69 C/V 1/4 2,03 F RSIR 771 559 522 418 134,00

NEU6187Z 10,00 C/V 1/3 2,61 F RSIR 918 654 600 477 151,00

NEU6210Z 12,12 C/V 1/3 3,15 F RSIR 1170 955 770 615 163,00

NEU6212Z 14,30 C/V 1/2 3,90 F RSIR 1365 1114 894 707 174,00

NEU6214Z 16,80 C/V 1/2 4,21 F RSIR 1569 1292 1047 836 199,00

NT6217Z 20,44 C/V 3/4 4,73 F RSIR 1795 1256 1173 938 292,00

NT6220Z 22,37 C/V 3/4 5,24 F RSIR 1897 1554 1260 1010 323,00

NJ6220Z 26,11 C/V 3/4 5,71 F RSIR 2202 1780 1419 1104 386,00

NJ6220Z () 26,11 C/V 3/4 5,71 F RSIR 2202 1780 1419 1104 379,00 NJ6226Z 34,38

C/V 1 5,95 F CSR 2852 2340 1892 1497 439,00 NJ6226Z () 34,38 C/V 1 5,95 F CSR

2852 2340 1892 1497 410,00

COMPRESORES R404A/ R452A BAJA TEMPERATURA. MONOFÁSICAS 220V

MODELO	CM3	EXP	C.V	INT (A)	REFR COMP	MOTOR	TEMP. DE EVAPORACIÓN			PRECIO
							-10°C	-25°C	-30°C	
EMT2117GK	4,50	C	1/4	1,15	F	CSIR	408	210	164	143,00
EMT2121GK	5,20	C	1/3	1,33	F	CSIR	487	258	204	146,00
EMT2125GK	5,96	C-V	1/3	1,57	F	CSIR	562	301	238	158,00
EMT2130GK	6,76	C-V	1/2	1,70	F	CSIR	605	326	257	165,00
NEU2140GK	8,78	C-V	1/2	2,63	F	CSIR	801	421	326	182,00
NEU2155GK	12,11	C-V	3/4	3,79	F	CSIR	1067	557	432	201,00
NEU2168GJ	14,28	C-V	3/4	3,48	F	CSIR	1213	642	496	240,00
NEU2178GK	16,80	C-V	1	4,27	F	CSIR	1416	753	586	287,00
NT2180GK	20,44	C-V	1	3,12	F	CSIR	1573	814	625	330,00
NT2192GK	22,40	C-V	1	4,92	F	CSIR	1693	865	669	365,00
NT2192GK(*)	22,40	C-V	1	4,92	F	CSIR	1693	865	669	345,00
NT2210GK	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	375,00
NT2210GK(*)	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	355,00
NT2212GK	27,78	C-V	1 1/2	5,30	F	CSIR	2174	1125	876	380,00
NJ2212GK	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	419,00
NJ2212GK(*)	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	394,00



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF8compresores_hermeticos_embraco_2019Télécharger