



INDUBEL S.R.L.

Dirección: Scalabrini Ortiz 1375, Bs. As.
Teléfonos: 4832-6004/6006/5030
E-mail: info@indubel.com.ar
Internet: www.indubel.com.ar

SANYO

No. : JS02-000-GGSY-06

APPROVAL SHEET SPECIFICATIONS OF HERMETIC SCROLL COMPRESSOR

CODE	809 830 45
MODEL	C-SB261H5A

△					
△					
△					
△					
△					
NO.	DATE	PAGE	REVISION DETAILS	SANYO SIGNED	CLIENT SIGNED

REVISION RECORD

USER:

MANUFACTURER:

DALIAN SANYO COMPRESSOR CO., LTD.

LEADER	PURCHASING MANAGER	TECHNICAL MANAGER	APPROVED	CHECKED	SUBMITTED

Section 1. General Specifications

Content		Unit	Specification
Compressor Model (Code)		—	C-SB261H5A (809 830 45)
Type		—	Hermetic Scroll Compressor
Application		—	High Back Pressure
Evap. Temp. Range		°C (°F)	-15~12 (5~54)
Compressor Cooling Type		—	Natural Cooling
Power Source	Phase	—	1
	Rated Voltage	V	220,230,240
	Rated Frequency	Hz	50
Voltage Range		V	198~264
Weight (Including Oil)		kg (lb)	38.5 (84.9)
Refrigerant		—	R22
Oil Type		—	SAY56T or Equivalent
Oil Charge		ml (fl oz)	1700 (57.5)
Displacement		cm ³ (in ³) /rev	55.7(3.40)
Motor	Motor Type	—	1-PH Induction Motor (CSR)
	Number of Poles	—	2
	Electrical Insulation	Class	E
	Nominal Revolution	min ⁻¹	2900
	Locked Rotor Ampere	A	100
	Winding Resistance [at 25°C (77°F)]	Ω	C-S 1.922
			C-R 0.711
Connection Tube	Suction Line (O.D.)	mm (in)	22.2 (0.875)
	Discharge Line (O.D.)	mm (in)	12.7 (0.500)
Compressor Surface Paint		—	Black Paint

Notes

- 1 Voltage range is applied at standard rating conditions.
- 2 Motor specifications in the table are the average values for your reference.
- 3 (): All units with parentheses are reference values.
- 4 Certifications:
CCC certificate No.2002020704000230.

5 Expiration of Specification

Expiration of this specification shall be effected until issuing a notice with indication of the expiration date from the issued date . In case of improvement or elimination of this specification , it shall be handled by the revision record based on agreement between both sides.

Section 2. Performance Warranty

2.1 Performance

Power Source (1PH)	Hz	50	Remark
	V	220	
Capacity	W	9,700	±7%
	(BTU/hr)	33,096	reference
Input Power	W	3,250	±7%
Current	A	15.40	±7%

Standard Rating Conditions

Condensing Temp.	°C (°F)	54.4(130)
Evaporating Temp.	°C (°F)	7.2(45)
Suction Gas Temp.	°C (°F)	18.3(65)
Liquid Temp.	°C (°F)	46.1(115)
Ambient Temp.	°C (°F)	35(95)

2.2 Sound Level

Power Source (1PH)	Hz	50
	V	220
Sound Level	dB(A)	62Max.
Notes 1 The operating conditions are the same as 2.1. 2 MIC location is the distance of 1m (3.28feet) from the compressor. 3 Sound Level is an average sound pressure level in four directions.		

2.3 Minimum Starting Voltage

Power Source (1PH)	Hz	50
Minimum Starting Voltage	V	198

Conditions

Compressor Temp.	°C (°F)	10~60(50~140)
Ambient Temp.	°C (°F)	10~40(50~105)
High Pressure	MPa(G)/psig	1.3(188)
Low Pressure	MPa(G)/psig	1.3(188)

2.4 Others

Content		Unit	Specification
Design Pressure	L.P. S.	MPa(G)/psig	1.6(232)
	H. P. S.	MPa(G)/psig	3.0(435)
Insulation Resistance		MΩ	100 (without refrigerant)
Dielectric Strength		V	1800 (1 second)
Residual Moisture		mg	300
Note: 1. The insulation resistance be measured with a DC500V megohm tester.			

Section 3. Standard Accessories

3.1 Accessories List

Parts Name	Qty	Parts code	Revision No.	Note
Terminal Box Cover	1	A-0101-DSB	0	Installed on Compressor
Terminal Box Clip	1	A-0201-DSB	0	Installed on Compressor
Insulating Grommet	1	A-0301-DSB	0	Installed on Compressor
Mounting Grommet	4	M-0101-DSB	0	Included with Compressor
Mounting Sleeve	4	M-0201-DSB	0	Included with Compressor
Screw Special	1	B-0101-DSB	0	Installed on Compressor

3.2 The Drawing for Reference

Parts Name	Parts Code	Revision No.
Compressor Outline Drawing	D-0101-DSB	0
Mounting Parts Listing	M-5101-DSB	0
Packing Dimensions	D-0201-DSB	0
Nameplate	A-5268-DSB	0
Wiring Diagram	E-0917-DSB	0

3. 3 Internal Motor Protector (in compressor)

Parts Name	Specification	
Internal Motor Protector	Trip Temperature	155±5℃
	Reset Temperature	80±9℃
	Trip Current	98A / 3~10s

3. 4 Electrical Component Required but not Included with compressor


Parts Name	Specification
Start Relay	P.U. 180~195V / D.O. 40~105V
Start Capacitor	100~140μF 330V (Bleed Resistor: Rf=18kΩ , 2W)
Running Capacitor	60μF 440V

Section 4. Compressor Protection

4.1 Protection Required but not Included with compressor


Protection Device	Items	Specifications
Anti-short Cycle Timer	Characteristic	To prevent the reverse rotation caused by brief power interruption
	Setting	3 minutes off / 7 minutes on
Crankcase Heater	Rated Power	35 Watts
Discharge Thermostat	Mounting Position	Located within 100mm(4 in)from the compressor shell
	Trip Temperature	$130\pm 5^{\circ}\text{C}$ ($266\pm 10^{\circ}\text{F}$)
	Reset Temperature	$95\pm 11^{\circ}\text{C}$ ($205\pm 20^{\circ}\text{F}$)
High Pressure Switch	Setting	Cut-out seting no higher than 3.0Mpa(G)
Low Pressure Switch	Setting	Cut-out seting no lower than 0.03Mpa(G)

4.2 Position of the Protection and Refrigerant Charging

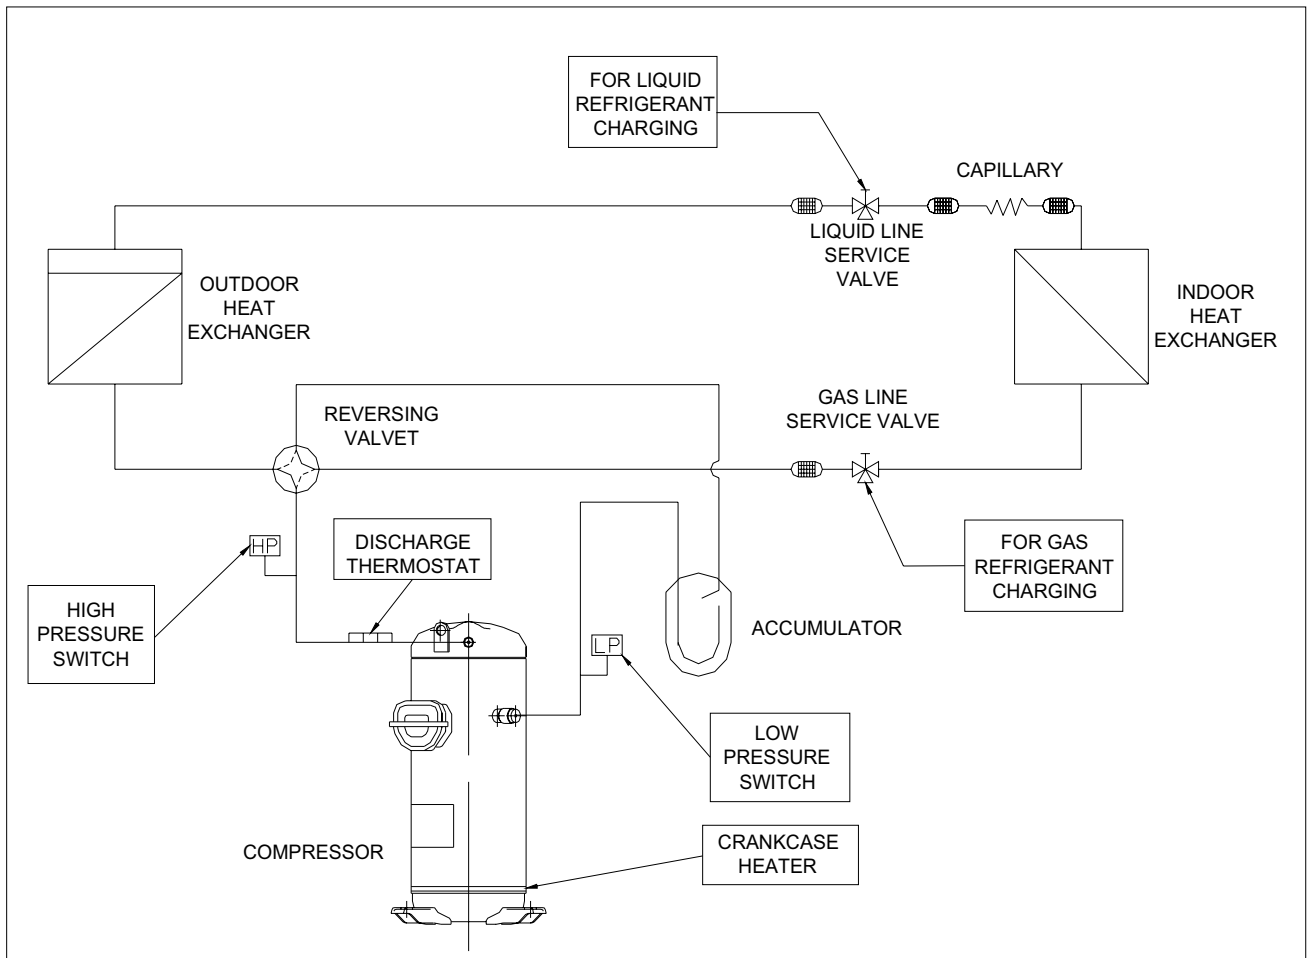

Section 5. Operating Envelope

Suction Gas Superheat: 11.1K
Refrigerant: R22

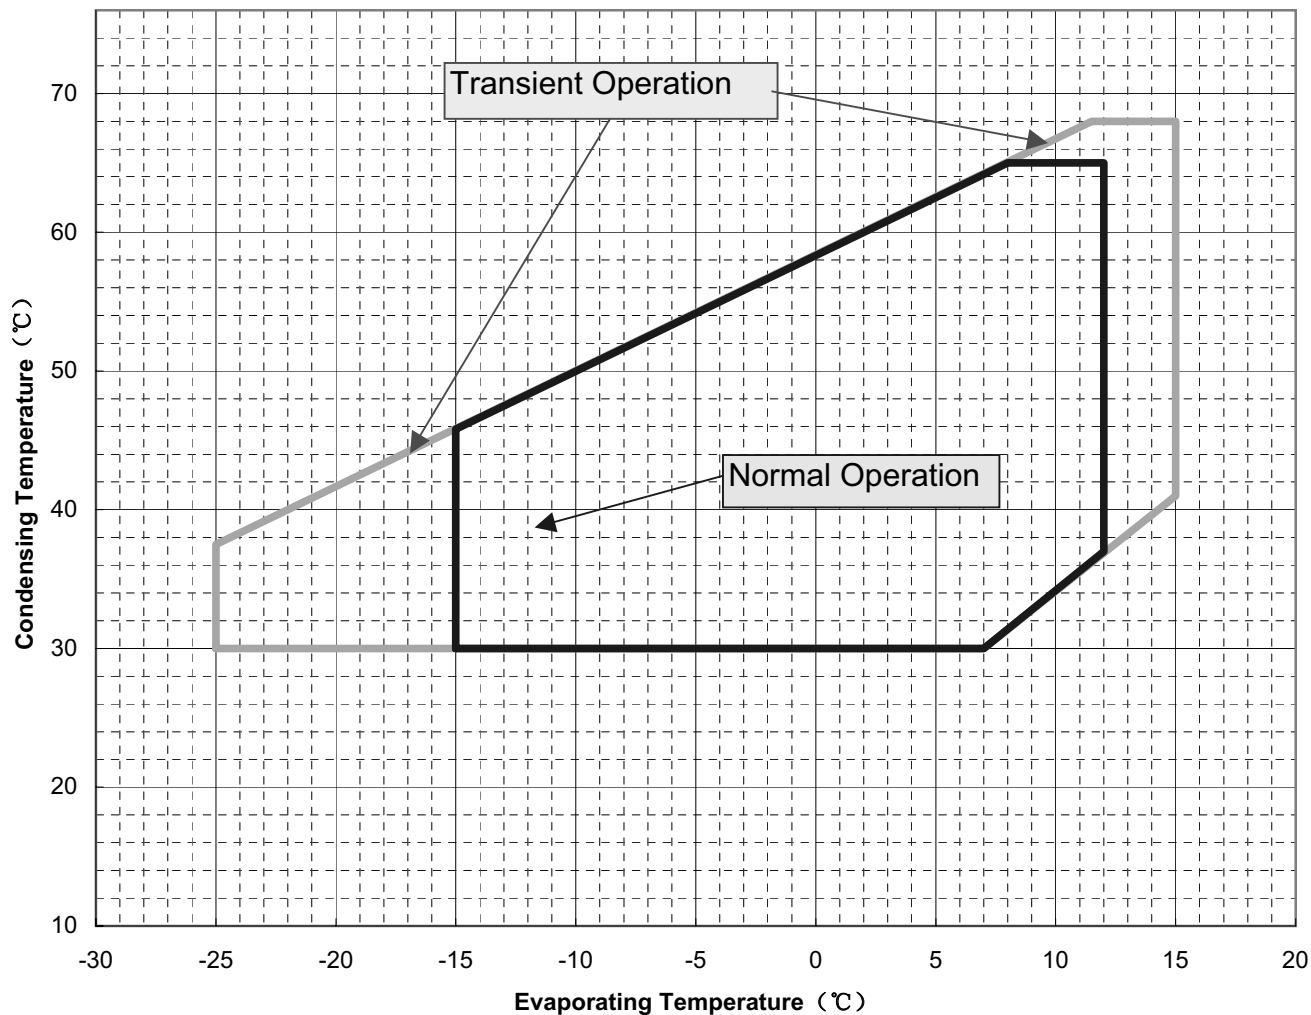

Section 6. Application Standard & Limit

The following requirements apply to vertical type hermetic scroll compressors:

Standard: Applicable to ordinary conditions in Japan JIS B8616 or standards relative to JIS B8616, such as standard rating conditions, maximum operating conditions, low temperature conditions, etc.

Limit: Applicable to transitional brief period of time, such as start-up and beginning of defrost mode.

No.	Item	Standard	Limit	Note
1	Refrigerant	R22(Meet the standard of Japan JIS K1517)		
2	Evaporating Temp.	-15~12℃(5~54 ° F) 0.20~0.62MPa(G)(29~90psig)	-25~15℃(-13~59 ° F) 0.10~0.69MPa(G)(14.5~100psig)	Comp. Suction Pressure
3	Condensing Temp.	30~65℃(86~149 ° F) 1.09~2.60MPa(G)(158~377psig)	68℃(155 ° F) 2.78MPa(G)(403psig)	Comp.Design Pressure(High) 3.0MPa(G) (435psig)
4	Compression Ratio	2 ~ 6	10	
5	Winding Temp.	115℃(240 °F) Max.	125℃(257 °F)	
6	Shell Bottom Temp.	90℃(194 °F) Max.		
		Evaporating Temp.+12℃(21 °F) Min.		Operating
		Ambient Temp.+11℃(20 °F) Min.		Not Operating
7	Discharge Gas Temp.	115℃(240 °F) Max.	C-SB:130℃(266°F) Max.	Temp. within 100mm(4in) of the discharge fitting.
			C-SC:135℃(275°F) Max.	Temp. inside of the well pipe on the top of compressor
8	Suction Gas Temp.	Superheat: 5K(10 °F)Min.	No excessive noise	It should meet the requirement of item 5, 6, 7 and 14 within 30cm of the suction fitting.
9	Running Voltage	Within ±10% of the rated voltage		Voltage at compressor terminals.
10	Starting Voltage	Three Phase Models: 85% of the rated voltage min.		Voltage at compressor terminals.
		Single Phase Models: 90% of the rated voltage min.		
11	On/Off Cycling	On Period: Until the oil level returns to the center of the lower bearing Off Period: Until balance of high and low pressure is obtained		For at least 7 minutes - on/3 minutes-off is recommendable.
12	Refrigerant Charge	oil/refrigerant(wt.)≥0.35		Specific gravity of the Oil:0.92.
13	Life Time	200,000 cycle		
14	Minimum Oil Level	C-SB: Center of the lower bearing	C-SB:Bottom of the lower bearing	
		C-SC:No less than 70% of the initial oil charge		
15	Abnormal Pressure Rise/Drop	Pressure Rise: 3.0MPa(G) (435psig) Max.		By high pressure switch
		Pressure Drop: 0.03MPa(G) (4.35psig) Min.		By low pressure switch
16	System Moisture Level	200ppm Max.		
17	System Uncondensable Gas Level	1 Vol.% Max. Residual Oxygen 0.1 Vol.% Max.		24 hrs. after vacuuming: 1.01kPa Max.
18	Tilt	5° Deg.Max.		

Operation beyond the above limits must be approved by Dalian SANYO Compressor Co., Ltd.

(G): Gauge Pressure

Notes

- 1 Installation should be completed within 15 minutes after removing the rubber plugs.
- 2 Do not use the compressor to compress air.
- 3 Do not energize the compressor under vacuumed condition.
- 4 Liquid refrigerant should be charged on liquid line between condenser and receiver. Do not charge the liquid refrigerant on the suction or discharge pipe of the compressor.
- 5 Do not tilt over the compressor while carrying it.
- 6 Do not remove the paint.
- 7 Crankcase heater is required when the oil sump temperature is too low to meet the requirement of item 6 on page 7.
- 8 Voltage fluctuation between compressor terminals, during operation, shall be within 2% of the rated voltage.
- 9 Do not operate compressor in reverse rotational direction.
- 10 Suction strainers are recommended for all applications.


Section 7. Selection of Electrical Wire

Voltage drop may occur due to the large current draw during compressor starting.


We recommend selecting the wire size from the table below.

6.1 Type of Unit

6.1.1 Window & Commercial Type Unit

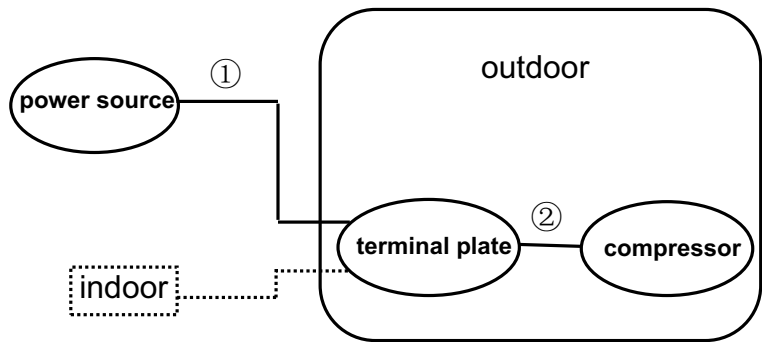

6.1.2 Split Type(Separate Type)

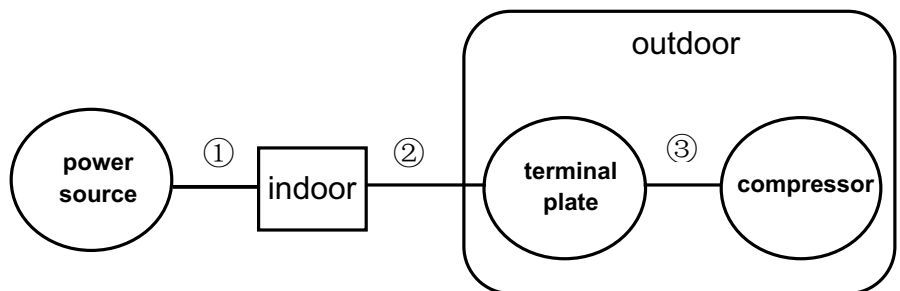


6.2 Size Table of Electrical Wire

Starting current (A)	Size of electrical wire (mm ²)						
	Remark ① or Remark ①+② (heat-resistance Temperature: 60°C(140°F) min.)						Remark③ (heat-resistance Temperature: 120°C(248°F) min.)
	5m max.	10m max.	15m max.	20m max.	30m max.	50m max.	1m max.
20max.	2.0	2.0	2.0	3.5	5.5	8.0	2.0
30max.	↑	↑	3.5	5.5	↑	14.0	↑
40max.	↑	3.5	5.5	↑	8.0	↑	↑
50max.	↑	↑	↑	8.0	14.0	22.0	↑
60max.	↑	5.5	↑	↑	↑	↑	↑
70max.	3.5	↑	8.0	14.0	↑	↑	3.5
80max.	↑	↑	↑	↑	22.0	30.0	↑
90max.	↑	↑	14.0	↑	↑	↑	↑
100max.	↑	8.0	↑	↑	↑	38.0	↑
110max.	↑	↑	↑	↑	↑	↑	↑
120max.	5.5	↑	↑	22.0	30.0	↑	↑
140max.	↑	14.0	↑	↑	↑	50.0	5.5
160max.	↑	↑	22.0	↑	↑	↑	↑
180max.	↑	↑	↑	↑	38.0	60.0	8.0
200max.	8.0	↑	↑	30.0	↑	↑	↑
220max.	↑	↑	↑	↑	50.0	80.0	↑
240max.	↑	↑	↑	↑	↑	↑	14.0



6.3 Caution of Ground

The internal motor protector does not protect the compressor against all possible conditions.

Please be sure that the system utilizes the ground connection when installed in the field.

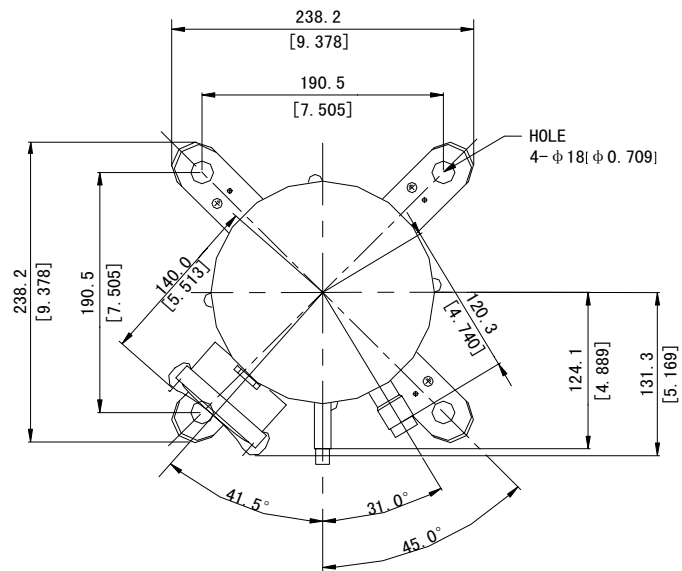

No.	Part Code	Qty	Name
1	809 830 45	1	Compressor
2	A-0101-DSB	1	Terminal Box Cover
3	A-0201-DSB	1	Terminal Box Clip
4	A-0301-DSB	1	Insulating Grommet
5	A-5268-DSB	1	Nameplate
6	B-0101-DSB	1	Screw Special


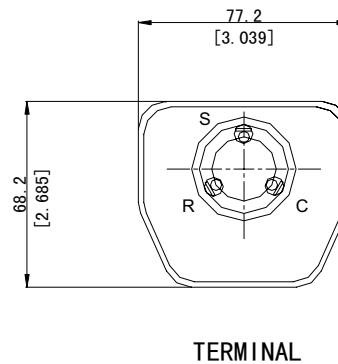
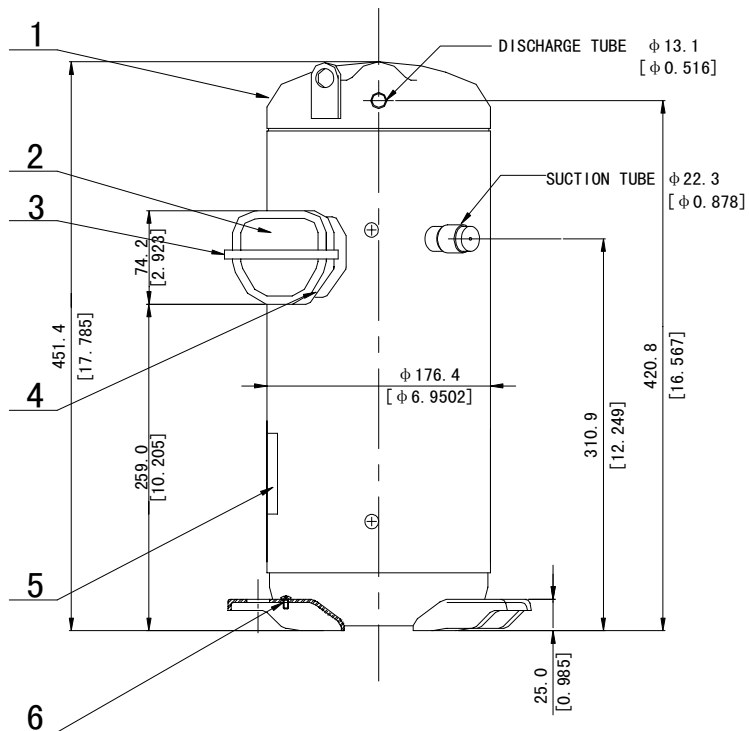


Part Code

D-0101-DSB


Name

Compressor Outline Drawing

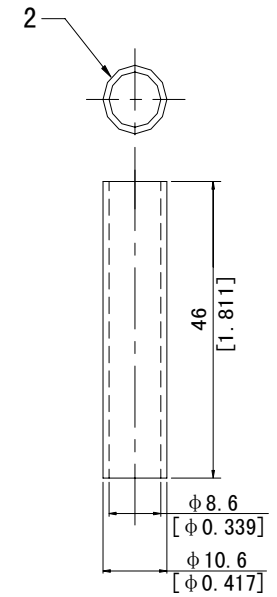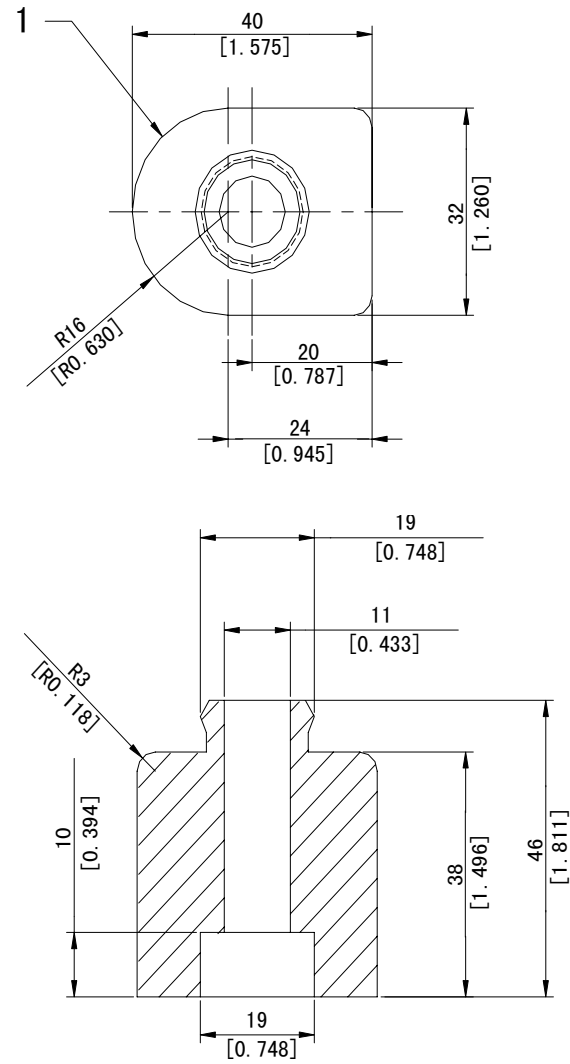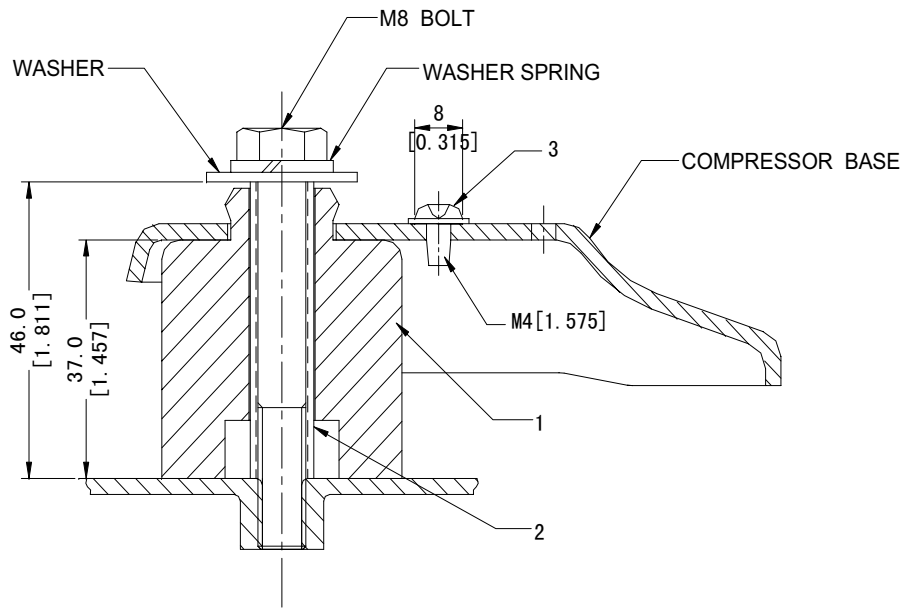

No.	Part	QTY	Name
1	M-0101-DSB	4	Mounting Grommet
2	M-0201-DSB	4	Mounting Sleeve
3	B-0101-DSB	1	Screw Special

Part Code
M-5101-DSB
Name
Mounting Parts Listing

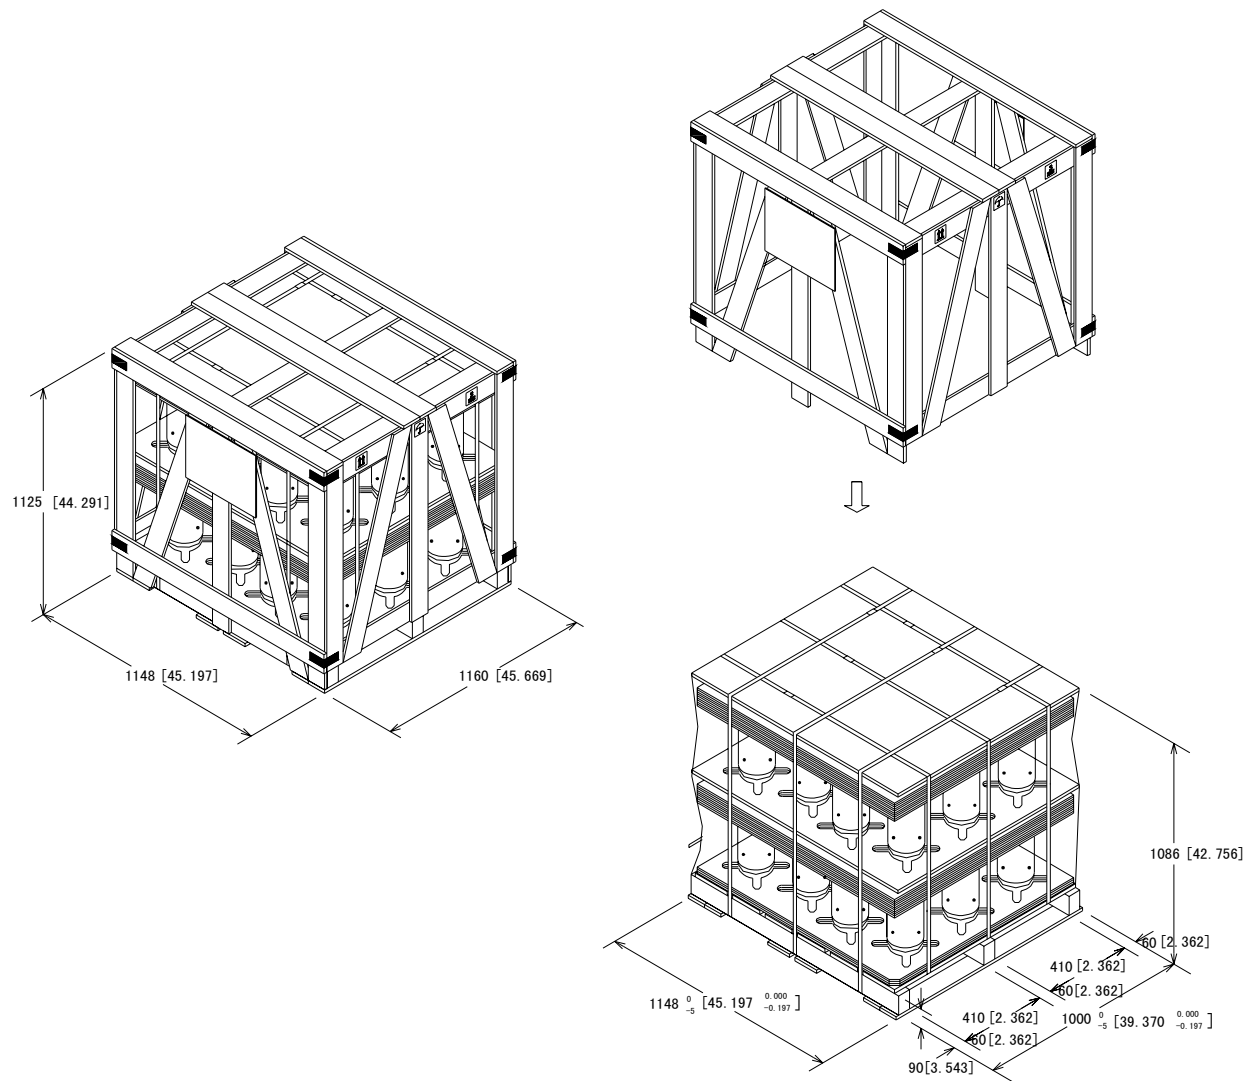


Part Code


D-0201-DSB

Name

Packing Dimensions

120 [4.724]		
CODE MODEL	809 830 45 C-SB261H5A	SANYO
AC 1PH 50Hz 220,230,240V REF. R22 OIL SAY56T RUN CAPACITOR 60uF X 440V DALIAN SANYO COMPRESSOR CO., LTD.		8AI  80983045XXXXXXXXXX XXXXXX
 80980002		
WARNING TERMINAL MUST BE CONNECTED WITH WIRE AS FOLLOWS COMPRESSOR MAY HAVE TROUBLE DUE TO INCORRECT WIRING  MFG. DATE XXXX.XX.XX SERIAL NO. XXXXXXX MADE IN CHINA		80 [3.150]

Part Code
A-5268-DSB
Name
Nameplate

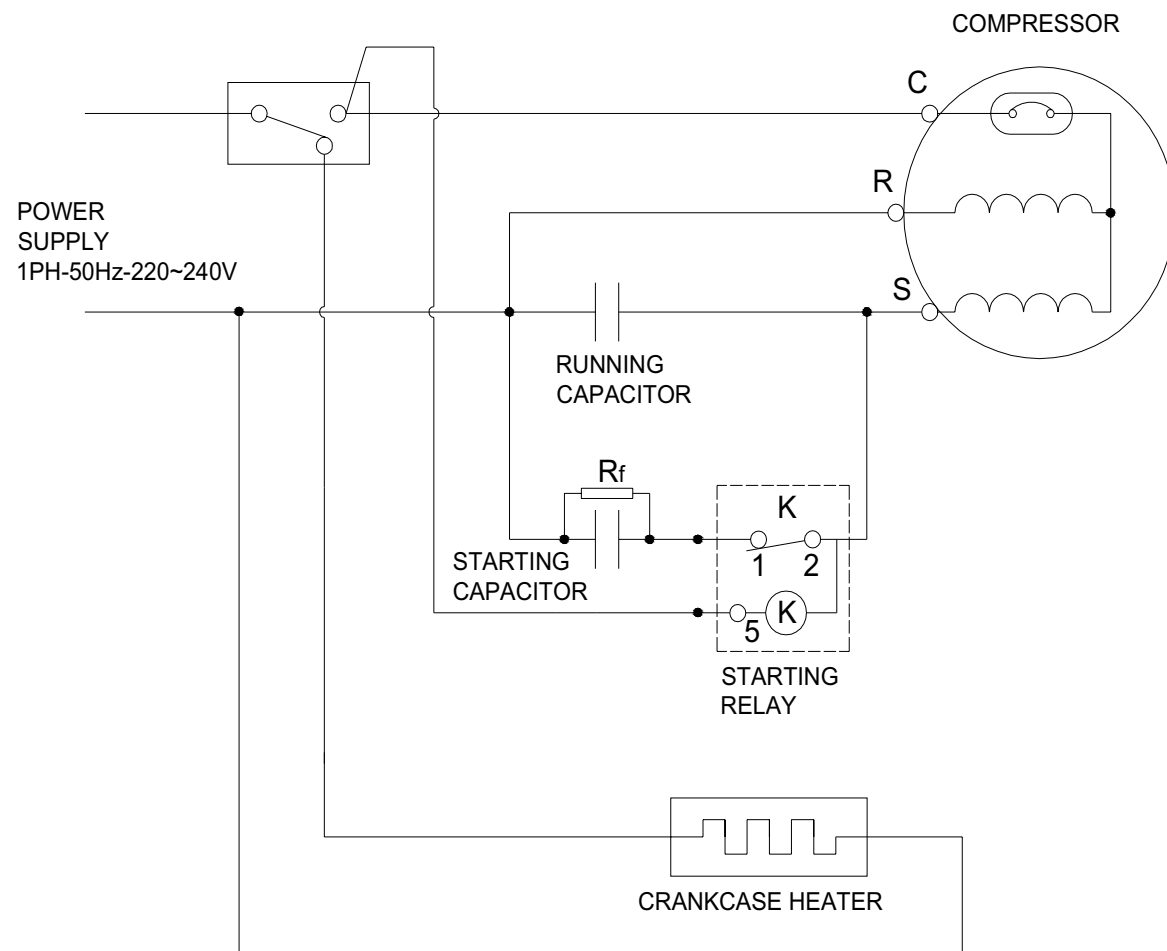

Part Code
E-0917-DSB
Name
Wiring Diagram