

Mbsm.pro, Compressor, D77C18RAX5, RSIR , 1/4 Hp, D Series, r134a, LBP, 186 W, Toshiba, Refrigerator, 14 Feet, GR-EF40, 2 Doors, New Compressor, PE75H1C, 250 w, 1/4 hp

 mbsm.pro/d77c18rax5

Category: compressor

written by www.mbsm.pro | 28 February 2022

Performance

Application : Low Back Pressure

Refrigerant : R134a (CF₃CH₂F)

Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity	COP	Capacity	COP
					W	W/W	W	W/W
	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-

Private Picture Copyright : WWW.MBSM.PRO

Item Performance characteristics

Refrigerant R134a

Displacement (cm³) 7.7

Voltage (V) 220

Frequency (Hz) 50

Motor Type RSIR

Capacity@ASHRAE 186

COP@ASHRAE 1.24

Capacity hp 1/4 hp



Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

GMCC

PE75H1C

RoHS

THERMALLY
PROTECTED


220V-240V~ 50Hz , 1Ph

R134a

SUCTION 



905019357EYBLELA Made in China



ANHUI MEIZHI COMPRESSOR CO., LTD

TOSHIBA NO FROST REFRIGERATOR

MODEL
RATED VOLTAGE
RATED FREQUENCY
RATED INPUT
RATED INPUT OF HEATING ELEMENT
DEFROSTING INPUT
RATED MAXIMUM INPUT OF LAMP
RATED CURRENT
CLIMATIC CLASS
ENERGY CONSUMPTION
INSULATION TYPE
REFRIGERANT
CHARGING VOLUME
FREEZING CAPACITY
WEIGHT
STORAGE VOLUME (L)
FREEZER
REFRIGERATOR
TOTAL GROSS VOLUME (L)
PERFORMANCE TEST SPEC.
PROTECTION DEGREE

GR-EF40P
220 V
50 Hz
134 W
170 W
170 W
1.6 W
1.6 A
5 T
1.3 KWH/24H
R-134a
130 g
5 Kg/24 H
68 kg
356
110
246
378
IEC2007/62552, 3793/2006
IPx 0

4YDQF09633


تحتوي : لا يستخدم هذا الجهاز إلا في حالة وجود توصيلات ارضي بالمبنى أو بشفطة نهجية تيار متغير (RCD) مع لوحة شالية
Made in EGYPT
Produced by EL ARABY Co. for ENGINEERING Ind., Under License
of TOSHIBA Corporation JAPAN

WIRING DIAGRAM

Fasten Receptacle
Relay Housing
Soldering

WIRING COLOR

Bl: Blue-White
or Blue
Bk: Black-White
or Black
Br: Brown-White
or Brown
Pp: Purple-White
or Purple
Cy: Gray-White
or Gray
R: Red-White
or Red
Pi: Pink
Or: Orange-White
or Orange
Wh: White

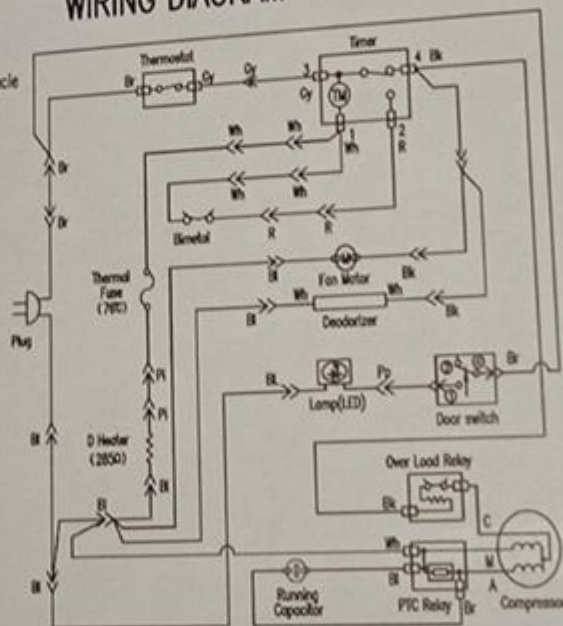





2019/3/7 17:19

Private Picture Copyright : WWW.MBSM.PRO

Performance

Application : Low Back Pressure

Refrigerant : R134a (CF₃CH₂F)

Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity W	COP W/W	Capacity W	COP W/W
	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-

Private Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_PE75H1CTélécharger](#)

[Mbsm_dot_pro_private_PDF_d77c18rax5Télécharger](#)