

Mbsm.pro, TECUMSEH, Compressor, Condensing, Units, AHC4540EFZ, FH4540F, FH4524F, FH4528F, FH4531F, FH4540F, R22, 3-1/2 HP, hbp, CSR, 220V ~ 50HZ

Category: compressor

written by www.mbsm.pro | 15 January 2022



Private Picture Copyright: WWW.MBSM.PRO

Performance

Condition	Test Voltage	(R) Btu/h	(R) kcal/h	(R) W	(I) W	(E) Btu/Wh	(E) kcal/Wh	W/W	EVAP TEMP	COND TEMP	AMBIENT TEMP	RETURN GAS	LIQUID TEMP
EN12900	220V ~ 50HZ	31460	7927	9217	3580	8.78	2.21	2.57	5°C (41°F)	50°C (122°F)	32°C (90°F)	20°C (68°F)	50°C (122°F)

General

Evaporating Temp. Range: -6.7°C to 12.8°C (20°F to 55°F)

Motor Torque: High Start Torque (HST)

Compressor Cooling: Fan

Mechanical

Weight: 37

Weight Unit of Measure: KG

Displacement (cc): 74.25

Oil Type: Polyolester
Viscosity (cSt): 32
Oil Charge (cc): 1480

Electrical

Voltage Range (50 Hz): 198-253
Voltage Range (60 Hz): N/A
Locked Rotor Amps (LRA): 94
Rated Load Amps (RLA 50 Hz): 18.6
Rated Load Amps (RLA 60 Hz): 0
Max. Continuous Current (MCC in Amps): 30.5
Motor Resistance (0hm) – Main: .6
Motor Resistance (0hm) – Start: 3
MotorType: CSR
Overload Type: N/A
Relay Type: N/A

Agency Approval

R134a, Room Temperature -25~10

Unit Model	Compressor	Condenser					
Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m³/h)	Fan Power (W)	Fan Voltage	
CE-THB4410Y	THB4410Y	1/8	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4413Y	THB4413Y	1/4	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4415Y	THB4415Y	1/6	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4419Y	THB4419Y	1/5	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4422Y	THB4422Y	1/5	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4425Y	AE4425Y	1/5	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4430Y	AE4430Y	1/4	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4440Y	AE4440Y	1/3	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4450Y	AE4450Y	3/8	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4456Y	AE4456Y	7/16	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4460Y	AE4460Y	1/2	220-240V/1/50HZ	1*φ200	560	38	220V
CE-CAJ4452Y	CAJ4452Y	3/7	220-240V/1/50HZ	1*φ200	560	38	220V
CE-CAJ4461Y	CAJ4461Y	1/2	220-240V/1/50HZ	1*φ250	1150	65	220V
CE-TAJ4461Y	CTAJ4461Y	1/2	400V/3/50HZ	1*φ250	1150	70	380V
CE-CAJ4476Y	CAJ4476Y	5/8	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-CAJ4492Y	CAJ4492Y	3/4	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ4492Y	TAJ4492Y	3/4	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ4511Y	CAJ4511Y	1	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ4511Y	TAJ4511Y	1	400V/3/50HZ	1*φ350	2980	138	380V
CE-CAJ4513Y	CAJ4513Y	1-1/8	220-240V/1/50HZ	1*φ350	2980	138	220V

CE-FH4518Y	FH4518Y	1-1/2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4518Y	TFH4518	1-1/2	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH4525Y	FH4525Y	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4525Y	TFH4525Y	2	400V/3/50HZ	1*φ350	3110	145	380V
CE-TAG4528Y	TAG4528Y	2-1/2	400V/3/50HZ	1*φ400	3900	190	380V
CE-TAG4534Y	TAG4534Y	2-1/2	400V/3/50HZ	1*φ400	3900	190	380V
CE-TAG4537Y	TAG4537Y	3-1/4	400V/3/50HZ	1*φ400	3900	190	380V
CE-TAH4543Y	TAG4543Y	3-1/2	400V/3/50HZ	2*φ350	6220	290	380V

R404A, Room Temperature -25℃~10℃

Unit Model Compressor Condenser

Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-FH4522Z	FH4522Z	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4522Z	TFH4522Z	2	400V/3/50HZ	1*φ350	2980	138	380V
CE-FH4524Z	FH4524Z	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4524Z	TFH4524Z	2	400V/3/50HZ	1*φ350	2980	138	380V
CE-FH4531Z	FH4531Z	2-3/4	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH4531Z	TFH4531Z	2-3/4	400V/3/50HZ	2*φ350	5960	276	380V
CE-FH4540Z	FH4540Z	3-1/2	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH4540Z	TFH4540Z	3-1/2	400V/3/50HZ	2*φ350	5960	276	380V
CE-TAG4546Z	TAG4546Z	4	400V/3/50HZ	2*φ350	5960	276	380V
CE-TAG4553Z	TAG4553Z	4-1/2	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4561Z	TAG4561Z	5	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4568Z	TAG4568Z	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4573Z	TAG4573Z	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4581Z	TAG4581Z	6-3/4	400V/3/50HZ	2*φ400	7800	380	380V

R404A, Room Temperature -30℃~ -10℃

Unit Model Compressor Condenser

Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-THB2360Z	THB2360Z	1/5	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-THB2378Z	THB2378Z	1/5	220-240V/1/50HZ	1*φ200	455	29	220V
CE-THB2396Z	THB2396Z	1/5	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE2410Z	AE2410Z	1/4	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE2415Z	AE2415Z	3/8	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE2420Z	AE2420Z	1/2	220-240V/1/50HZ	1*φ250	1000	70	220V
CE-AE2425Z	AE2425Z	5/8	220-240V/1/50HZ	1*φ300	1664	85	220V
CE-TYA2431ZKS	TYA2431ZKS	1	220-240V/1/50HZ	1*φ300	1664	85	220V
CE-TYA2438ZKS	TYA2438ZKS	1-1/4	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TYA2431ZKS	TYA2431ZKS	1-1/3	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-CAJ2428Z	CAJ2428Z	3/4	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ2428Z	TAJ2428Z	3/4	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ2432Z	CAJ2432Z	3/4	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ2432Z	TAJ2432Z	3/4	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ2440Z	CAJ2440Z	1	220-240V/1/50HZ	1*φ300	2100	115	220V


CE-CAJ2446Z	CAJ2446Z	1	220-240V/1/50HZ	1*φ300	2100	115	380V
CE-TAJ2446Z	TAJ2446Z	1	400V/3/50HZ	1*φ300	2150	120	220V
CE-CAJ2464Z	CAJ2464Z	1-1/2	220-240V/1/50HZ	1*φ350	2980	138	380V
CE-TAJ2464Z	TAJ2464Z	1-1/2	400V/3/50HZ	1*φ350	3110	145	220V
CE-FH2480Z	FH2480Z	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH2480Z	TFH2480Z	2	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH2511Z	FH2511Z	3	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH2511Z	TFH2511Z	3	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG2513Z	TAG2513Z	3-1/4	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG2516Z	TAG2516Z	4	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG2522Z	TAG2522Z	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG2525Z	TAG2525Z	6-1/4	400V/3/50HZ	2*φ400	7800	380	380V

R22, Room Temperature -25℃~10℃

Unit Model		Compressor	Condenser				
Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-AE4425E	AE4425E	1/5	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE4430E	AE4430E	1/4	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AEZ4440E	AEZ4440E	1/3	220-240V/1/50HZ	1*φ200	455	29	220V
CE-CAE4450E	CAE4450E	7/16	220-240V/1/50HZ	1*φ250	1000	70	220V
CE-CAE4460E	CAE4460E	1/2	220-240V/1/50HZ	1*φ250	1000	70	220V
CE-CAJ9480T	CAJ9480T	5/8	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ9480T	TAJ9480T	5/8	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ9510T	CAJ9510T	1	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ9510T	TAJ9510T	1	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ9513T	CAJ9513T	1-1/8	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ9513T	TAJ9513T	1-1/8	400V/3/50HZ	1*φ350	3110	145	380V
CE-CAJ4517E	CAJ4517E	1-1/4	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ4517T	TAJ4517T	1-1/4	400V/3/50HZ	1*φ350	3110	145	380V
CE-CAJ4519T	CAJ4519T	1-3/4	220-240/1/50HZ	1*φ350	2980	138	220V
CE-TAJ4519T	TAJ4519T	1-3/4	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH4522F	FH4522F	2	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH4522F	TFH4522F	2	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH4524F	FH4524F	2	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH4524F	TFH4524F	2	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH4531F	FH4531F	2-3/4	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH4531F	TFH4531F	2-3/4	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH4540F	FH4540F	3-1/2	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH4540F	TFH4540F	3-1/2	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG4546T	TAF4546T	4	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4553T	TAF4553T	4-1/2	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4561T	TAG4561T	5	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4568T	TAG4568T	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4573T	TAF4573T	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-AJ5512E	AJ5512E	1	220-240V/1/50HZ	1*φ300	1664	85	220V

CE-AJ5515E AJ5515E	1-1/4	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ5515E TAJ5515E	1-1/4	400V/3/50HZ	1*φ350	3110	145	380V
CE-AJ5519E AJ5519E	1-1/2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ5519E TAJ5519E	1-1/2	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH5524E FH5524E	2	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH5524E TFH5524E	2	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH5531E FH5531E	2-3/4	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH5531E TFH5531E	2-3/4	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH5540E FH5540E	3-1/3	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH5540E TFH5540E	3-1/3	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG5546E TAG5546E	3-5/6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5553E TAG5553E	4-1/2	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5561E TAG5561E	5	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5568E TAG5568E	5-2/3	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5573E TAG5573E	6	400V/3/50HZ	2*φ400	7800	380	380V

□□

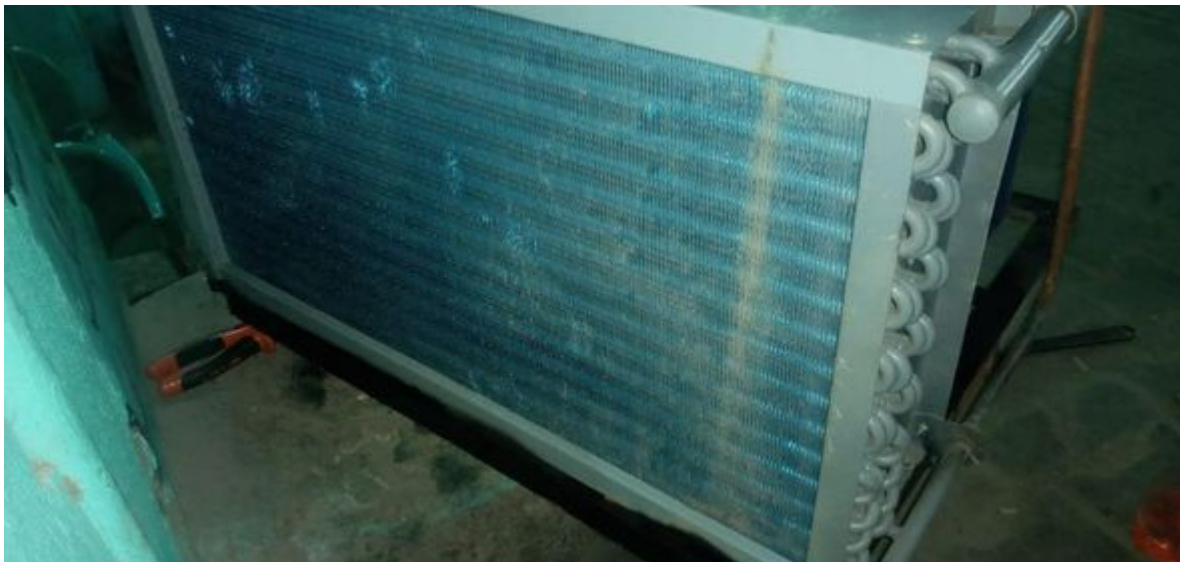

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

商用低回压压缩机

说明 NOTES

- ① C-毛细管 V-膨胀阀
- ② F-风扇冷却
- ③ 如有需要,可代订其他电压型号,详情请与本公司联络
- ④ 冷凝温度为50℃
- ⑤ 冷凝温度为45℃
- ⑥ 冷凝温度为40℃
- ⑦ TAGP型号是用于并联安装应用,配备油、气平衡接口

SE 低噪音和高效率系列

型号	排气量(cc)	背压	电机类型	型号	排气量(cc)	背压	电机类型	型号	排气量(cc)	背压	电机类型
AE7415EK	5.48		MBP CSIR	AE4430Y	8.86		HBP CSIR	AE4430Z	5.68		HMBPCSR
AE4430EK	6.92		HBP CSR	AE4430Y	8.86		HBP CSIR	AE4440Z	7.57		HMBPCSR
AE7422EK	7.55		MBP CSIR	AE4440Y	12.05		HBP CSIR	AE4440Z	7.57		HMBPCSR
AE4440EK	7.57		HBP CSR	AE4448Y	14.14		HBP CSIR	BA7430Z	8.85		HMBPCSR
AE7426EK	8.85		MBP CSIR	AE9437Y-SR18			HMBPCSR	BA7440Z	12.05		HMBPCSR
AE4448EK	8.85		HBP CSR	CA9440Y	20		HMBPCSR	BA7443Z	14.14		HMBPCSR
AE7435EK	12.04		MBP CSR	CA9445Y	22.3		HMBPCSR	BA7452Z	16.08		HMBPCSR
AE7440EK	14.14		MBP CSR	WJ9460YK	30.5		HMBPCSR	BA7459Z	18		HMBPCSR
AE4474EK	14.14		HBP CSR	AW4513YK	35.6		HMBPCSR	WJ9470Z	21.5		HMBPCSR
AE7445EK	16.08		MBP CSR	AW4515YK	39.6		HMBPCSR	WJ9485Z	24.2		HMBPCSR
AE7457GK	18		HMBPCSR	AW4517YK	48.4		HMBPCSR	WJ9490Z	26.7		HMBPCSR
WJ9470EK	21.5		MBP CSR					WJ9510Z	30.5		HMBPCSR
WJ5513EK	21.5		HBP CSR					AW9510Z	35.6		HMBPCSR
WJ9480EK	24.2		MBP CSR					AW7514Z	43.1		HMBPCSR
WJ5515EK	24.2		HBP CSR					AW9516Z	53.5		HMBPCSR
WJ9485EK	26.7		MBP CSR								
WJ5516EK	26.75		HBP CSR								
WJ9510EK	30.5		MBP CSR								
WJ5518EK	31		HBP CSR								
AW4519EK	35.6		HBP CSR								
AW4524EK	43.1		HBP CSR								
AW4532EK	53.5		HBP CSR								

KK压缩机R22 R134a R404a型号互换-低背压LBP

R22				R134a				R404a			
型号	排气量(cc)	背压	电机类型	型号	排气量(cc)	背压	电机类型	型号	排气量(cc)	背压	电机类型
AE7415EK	5.48		MBP CSIR	C-BZN201L5	8.37		LBP CSIR	AE2410ZK/ C-BR225L55.99/	5.2		LBP CSIR/ CSR
AE7422EK	7.55		MBP CSIR					AE2413ZK/ C-BR250L56.91/	5.7		LBP CSIR/ CSR
AE7426EK	8.85		MBP CSIR					AE2416ZK/ C-BR425L58.86/	8.37		LBP CSIR/ CSR
AE7435EK	12.04		MBP CSR					AE2420ZK-SR	12.05		LBP CSR
AE7440EK	14.14		MBP CSR					AE2425ZK	14.14		LBP CSR
AE7445EK	16.08		MBP CSR					AE2428ZK-SR	16.08		LBP CSR
AE7457GK	18		HMBPCSR					AE2432ZK	18		LBP CSR
WJ9470EK	21.5		MBP CSR					CA2435Z	20		LBP CSR
WJ9480EK	24.2		MBP CSR					WJ2440ZK	24.2		LBP CSR
WJ9485EK	26.7		MBP CSR					WJ2450ZK	26.75		
WJ9510EK	30.5		MBP CSR								

MEDIUM/HIGH BAK PRESSURE COMPRESSORS

商用中/高回压压缩机

COMPRESSOR MODELS 压缩机型号	Nominal Power(H.P.)						REFRIGERATION CAPACITY AT 50 Hz Rated @54.5℃ Cond.Temp(Watts) 50Hz制冷量, 测试标准在 54.5℃ 冷凝温度下 Evaporating Temperature 蒸发温度						VOLTAGE 电 压 ③
	Refrigerant												
	名 义 马 力 (匹)	制 冷 剂	气 缸 排 气 量	装 油 量	Displacement(cm ³)		Oil charge(cm ³)						
					① 膨 胀 装 置	Cooling ② 冷 却 法	Expansion device						
-25℃	-15℃	-10℃	0℃	+7.2℃	+15℃								
R22													
AEZ4425E	1/5	R22	4.50	250	C,V	F	138 ⁸	192	256	413	553	728	220-240V/ 1/ 50Hz
AEZ4430E	1/4	R22	5.70	250	C,V	F	192 ⁸	255	336	538	718	945	220-240V/ 1/ 50Hz
AEZ3440E	1/3	R22	7.55	350	C	F	308 ⁸	362	464	733	980	1298	220-240V/ 1/ 50Hz
AEZ4440E	1/3	R22	7.55	350	C,V	F	308 ⁸	362	464	733	980	1298	220-240V/ 1/ 50Hz
AEZ9440T	1/3	R22	7.55	350	C,V	F	222	362	464	733	975	1302	220-240V/ 1/ 50Hz
CAE4450E	3/7	R22	9.40	350	C,V	F	355 ⁸	426	554	896	1212	1623	220-240V/ 1/ 50Hz
CAE9450T	3/7	R22	9.40	350	C,V	F	256	426	554	896	1212	1623	220-240V/ 1/ 50Hz
CAE9460T	1/2	R22	11.30	350	C,V	F	324	553	715	1134	1514	2000	220-240V/ 1/ 50Hz
CAJ9480T TAJ9480T	5/8	R22	15.20	887	C,V	F	461	786	1011	1586	2103	2761	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ9510T TAJ9510T	1	R22	18.30	887	C,V	F	545	956	1229	1909	2510	3266	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ9513T TAJ9513T	1-1/8	R22	24.20	887	C,V	F	526	1074	1451	2411	3272	4366	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ4517E TAJ4517T	1-1/4	R22	25.95	887	C,V	F	771 ⁸	1233	1673	2727	3629	4743	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ4519T TAJ4519T	1-3/4	R22	34.45	887	C,V	F	1382 ⁸	1780	2304	3601	4738	6162	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4522F TFH4522F	2	R22	39.95	1480	C,V	F	1068 ⁸	1598	2202	3774	5206	7042	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4524F TFH4524F	2	R22	43.50	1480	C,V	F	1463 ⁸	1841	2456	4131	5706	7759	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4531F TFH4531F	2-3/4	R22	56.65	1480	C,V	F	1780 ⁸	2620	3504	5659	7528	9854	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
TFH4538E	3	R22	67.50	1625	C,V	F		3100	4169	7041	9659	13400	400V / 3 / 50Hz
TFH4540F	3-1/2	R22	74.25	1480	C,V	F	1299 ⁸	3000	4301	7330	9863	12938	400V / 3 / 50Hz
TAG/TAGP4546T ⁷	4	R22	90.20	1960	C,V	F	1328	3103	4368	7839	11253	15961	400V / 3 / 50Hz
TAG/TAGP4553T ⁷	4-1/2	R22	100.70	1960	C,V	F	1528	3875	5306	9105	12927	18406	400V / 3 / 50Hz
TAG/TAGP4561T ⁷	5	R22	112.50	1960	C,V	F	2059	4465	6133	10593	14870	20658	400V / 3 / 50Hz
TAG/TAGP4568T ⁷	6	R22	124.40	1960	C,V	F	2493	5157	6967	11862	16676	23359	400V / 3 / 50Hz
TAG/TAGP4573T ⁷	6	R22	134.80	1960	C,V	F	2803	5629	7501	12632	17816	25204	400V / 3 / 50Hz
TAGD4590T	7-1/2	R22	180.40	3920	C,V	F	2656	6206	8735	15678	22506	31922	400V / 3 / 50Hz
TAGD4610T	9	R22	201.40	3920	C,V	F	3055	7750	10613	18211	25844	36811	400V / 3 / 50Hz
TAGD4612T	10	R22	225.00	3920	C,V	F	4117	8929	12267	21186	29739	41315	400V / 3 / 50Hz
TAGD4614T	12	R22	248.80	3920	C,V	F	4987	10314	13933	23724	33352	46718	400V / 3 / 50Hz

商用中/高回压压缩机

COMPRESSOR MODELS 压缩机型号	Nominal Power(H.P.)						REFRIGERATION CAPACITY AT 50 Hz						VOLTAGE 电 压 ③
	Refrigerant						Rated @54.5℃ Cond.Temp(Watts) 50Hz制冷量, 测试标准在 54.5℃ 冷凝温度下						
	名 义 马 力 (匹)	制 冷 剂	Displacement(cm ³)		Oil charge(cm ³)		Evaporating Temperature 蒸发温度						
			气 缸 排 气 量	装 油 量	Expansion device		-25℃	-15℃	-10℃	0℃	+7.2℃	+15℃	
					① 膨 胀 装 置	Cooling ② 冷 却 法							
R22													
AEZ4425E	1/5	R22	4.50	250	C,V	F	138 ^s	192	256	413	553	728	220-240V/ 1/ 50Hz
AEZ4430E	1/4	R22	5.70	250	C,V	F	192 ^s	255	336	538	718	945	220-240V/ 1/ 50Hz
AEZ3440E	1/3	R22	7.55	350	C	F	308 ^s	362	464	733	980	1298	220-240V/ 1/ 50Hz
AEZ4440E	1/3	R22	7.55	350	C,V	F	308 ^s	362	464	733	980	1298	220-240V/ 1/ 50Hz
AEZ9440T	1/3	R22	7.55	350	C,V	F	222	362	464	733	975	1302	220-240V/ 1/ 50Hz
CAE4450E	3/7	R22	9.40	350	C,V	F	355 ^s	426	554	896	1212	1623	220-240V/ 1/ 50Hz
CAE9450T	3/7	R22	9.40	350	C,V	F	256	426	554	896	1212	1623	220-240V/ 1/ 50Hz
CAE9460T	1/2	R22	11.30	350	C,V	F	324	553	715	1134	1514	2000	220-240V/ 1/ 50Hz
CAJ9480T TAJ9480T	5/8	R22	15.20	887	C,V	F	461	786	1011	1586	2103	2761	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ9510T TAJ9510T	1	R22	18.30	887	C,V	F	545	856	1029	1599	2510	3266	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ9513T TAJ9513T	1-1/8	R22	24.20	887	C,V	F	526	1074	1451	2411	3272	4366	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ4517E TAJ4517T	1-1/4	R22	25.95	887	C,V	F	771 ^s	1233	1673	2727	3629	4743	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ4519T TAJ4519T	1-3/4	R22	34.45	887	C,V	F	1382 ^s	1780	2304	3601	4738	6162	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4522F TFH4522F	2	R22	39.95	1480	C,V	F	1068 ^s	1598	2202	3774	5206	7042	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4524F TFH4524F	2	R22	43.50	1480	C,V	F	1463 ^s	1841	2456	4131	5706	7759	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4531F TFH4531F	2-3/4	R22	56.65	1480	C,V	F	1780 ^s	2620	3504	5659	7528	9854	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
TFH4538E	3	R22	67.50	1625	C,V	F		3100	4169	7041	9659	13400	400V / 3 / 50Hz
TFH4540F	3-1/2	R22	74.25	1480	C,V	F	1299 ^s	3000	4301	7330	9863	12938	400V / 3 / 50Hz
TAG/TAGP4546T ⁷	4	R22	90.20	1960	C,V	F	1328	3103	4368	7839	11253	15961	400V / 3 / 50Hz
TAG/TAGP4553T ⁷	4-1/2	R22	100.70	1960	C,V	F	1528	3875	5306	9105	12927	18406	400V / 3 / 50Hz
TAG/TAGP4561T ⁷	5	R22	112.50	1960	C,V	F	2059	4465	6133	10593	14870	20658	400V / 3 / 50Hz
TAG/TAGP4568T ⁷	6	R22	124.40	1960	C,V	F	2493	5157	6967	11862	16676	23359	400V / 3 / 50Hz
TAG/TAGP4573T ⁷	6	R22	134.80	1960	C,V	F	2803	5629	7501	12632	17816	25204	400V / 3 / 50Hz
TAGD4590T	7-1/2	R22	180.40	3920	C,V	F	2656	6206	8735	15678	22506	31922	400V / 3 / 50Hz
TAGD4610T	9	R22	201.40	3920	C,V	F	3055	7750	10613	18211	25844	36811	400V / 3 / 50Hz
TAGD4612T	10	R22	225.00	3920	C,V	F	4117	8929	12267	21186	29739	41315	400V / 3 / 50Hz
TAGD4614T	12	R22	248.80	3920	C,V	F	4987	10314	13933	23724	33352	46718	400V / 3 / 50Hz



6546230100
TFH4531F



54 M0511 90 075755 A

COUNTRY OF ORIGIN : FRANCE THERMALLY PROTECTED

R22 LRA 31

400V 3~ 50Hz FLA 4.8

440V 3~ 60Hz FLA 5.1



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_fh4540fTélécharger

Mbsm_dot_pro_private_PDF_fh4540f-1Télécharger

Mbsm_dot_pro_private_PDF_fh4540f-2-1Télécharger