

Daewoo, HSL11Y-5 , Compresseur hermétique, R-134a, 93W, RSIR , 1/8Hp

Category: compressor

written by www.mbsm.pro | 26 May 2020

Series	Model	Displacement [cc/rev]	Consumption Power [W]	Cooling Capacity			Efficiency			Motor Type	Cooling Type	Net Weight [kg]	Oil Qty. [cc]
				kcal/h	Watt	Btu/h	EFF kcal/Wh	COP W/W	EER Btu/Wh				
DS	DS22LHS8	2.18	57	37	43	147	1.54	0.75	2.58	RSIR	ST	6.0	180
	DS25LHS8	2.54	63	50	58	198	1.26	0.92	3.15	RSIR	ST	6.0	180
	DS30LHS8	3.06	78	69	80	274	1.13	1.03	3.51	RSIR	ST	6.0	180
WX	WX20LHS5T	2.01	58	29	34	115	2.00	0.58	1.98	RSIR	ST	5.9	180
	WX24LHS5	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX24LHS5T	2.54	64	40	47	159	1.60	0.73	2.48	RSIR	ST	5.9	180
	WX24LHS8	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX30LHS5	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHS5T	3.06	88	59	69	234	1.49	0.78	2.66	RSIR	ST	5.9	180
	WX30LHS8	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHT5W	3.06	75	52	60	206	1.44	0.81	2.75	RSIR	ST	5.9	180
	WX35LHS5T	3.51	98	64	74	254	1.53	0.76	2.59	RSIR	ST	5.9	180
	WX35LHT5W	3.51	99	64	74	254	1.55	0.75	2.57	RSIR	ST	5.9	180
Y	HPL7Y-5	2.65	62	50	58	198	1.24	0.94	3.20	RSCR	ST	6.7	230
	HPL9Y-5	3.43	76	58	67	230	1.31	0.89	3.03	RSCR	ST	6.7	230
	HSL11Y-5	4.51	89	80	93	317	1.11	1.05	3.57	RSCR	ST	7.0	230
	HSL5Y-5	2.29	65	35	41	139	1.86	0.63	2.14	RSIR	ST	6.3	230
	HSL5Y-5P	2.29	64	35	41	139	1.83	0.64	2.17	RSIR	ST	6.7	230
	HSL7Y-5	2.65	74	48	56	190	1.54	0.75	2.57	RSIR	ST	6.7	230
	HSL9Y-5	3.43	74	46	53	183	1.61	0.72	2.47	RSIR	ST	6.7	230
	HSL11Y-5	4.51	109	80	93	317	1.36	0.85	2.91	RSIR	ST	7.0	230
	HSL11Y-5A	4.51	102	85	99	337	1.20	0.97	3.31	RSIR	ST	7.0	230
	HSL11Y-5T	4.51	108	78	91	310	1.38	0.84	2.87	RSIR	ST	7.0	230
	JE	HPL13JE-5	4.62	97	93	108	369	1.04	1.12	3.80	RSCR	ST/FC	7.4
HPL15JE-5		5.12	107	107	124	425	1.00	1.16	3.97	RSCR	ST/FC	7.7	230
HPL17JE-5		5.55	124	123	143	488	1.01	1.15	3.94	RSCR	ST/FC	7.7	230
HPL19JE-5		5.84	124	134	156	532	0.93	1.26	4.29	RSCR	ST/FC	8.2	230
HSL15JE-5		5.12	114	108	126	429	1.06	1.10	3.76	RSIR	ST/FC	7.7	230
HSL15JE-5A		5.12	117	109	127	433	1.07	1.08	3.70	RSIR	ST/FC	7.7	230
HSL15JE-5C		5.12	115	108	126	429	1.06	1.09	3.73	RSIR	ST/FC	7.8	230

Private Picture Copyright: WWW.MBSM.PRO

Daewoo, HSL11Y-5 , Compresseur hermétique, R-134a, 109W, RSIR , 1/8Hp

R134a, FL1568-SL, HITACHI Compressor, 220 v 50Hz, 1/4 Hp, white whale, 18Feet, LBp, 200W

Category: compressor

written by www.mbsm.pro | 26 May 2020

14/8/2556 OVERLOAD RELAY - Hitachi Compressor (Thailand) ,Ltd..htm

FL0739-S*	3.9	94	81	321	270	St		RSIR	7.8	179
FL0845-S*	4.5	117	100	400	270	St		RSIR	8.1	179
FL1052-S*	5.2	121	104	413	270	St		RSIR	8.3	179
FL1152-S*	5.2	136	117	464	260	St		RSCR	8.3	179
FL1152-S*	5.2	134	115	457	280	St		RSIR	9.3	188
220-240V 50Hz FL1157-S*	5.7	136	117	464	240	St		RSIR	8.7	178
FL1257-S*	5.7	150	129	512	240	St		RSIR	9.3	181
FL1257-S*	5.7	173	148	591	240	St		RSCR	9.3	181
FL1262-S*	6.2	145	124	495	310	St		RSIR	10.5	200
FL1462-S*	6.2	165	142	563	310	St		RSIR	10.5	200
FL1462-S*	6.2	185	159	632	310	St		RSCR	11.9	216
FL1568-S*	6.8	180	154	615	310	St		CSIR	11.5	216
FL1568-S*	6.8	200	172	683	310	St		RSIR	10.5	200
FL1568-S*	6.8	200	172	683	310	St		RSCR	10.5	200
FL1875-S*	7.5	215	184	734	335		OC	RSIR	10.8	211
FL1875-S*	7.5	208	178	710	310			F RSIR	11.9	216
FL1888-S*	8.8	207	178	707	300		OC	RSIR	11.2	216
FL2088-S*	8.8	256	220	874	380			F CSR	11.4	210
FL2088-S*	8.8	245	210	836	300		OC	RSCR	11.9	216
FL2088-S*	8.8	245	210	836	300		OC	CSIR	11.9	216
FL2088-S*	8.8	245	210	836	300		OC	RSIR	11.6	216



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_P_COM008_105_specTélécharger

14/8/2556 OVERLOAD RELAY - Hitachi Compressor (Thailand) ,Ltd..htm

FL0739-S*	3.9	94	81	321	270	St		RSIR	7.8	179
FL0845-S*	4.5	117	100	400	270	St		RSIR	8.1	179
FL1052-S*	5.2	121	104	413	270	St		RSIR	8.3	179
FL1152-S*	5.2	136	117	464	260	St		RSCR	8.3	179
FL1152-S*	5.2	134	115	457	280	St		RSIR	9.3	188
220-240V 50Hz FL1157-S*	5.7	136	117	464	240	St		RSIR	8.7	178
FL1257-S*	5.7	150	129	512	240	St		RSIR	9.3	181
FL1257-S*	5.7	173	148	591	240	St		RSCR	9.3	181
FL1262-S*	6.2	145	124	495	310	St		RSIR	10.5	200
FL1462-S*	6.2	165	142	563	310	St		RSIR	10.5	200
FL1462-S*	6.2	185	159	632	310	St		RSCR	11.9	216
FL1568-S*	6.8	180	154	615	310	St		CSIR	11.5	216
FL1568-S*	6.8	200	172	683	310	St		RSIR	10.5	200
FL1568-S*	6.8	200	172	683	310	St		RSCR	10.5	200
FL1875-S*	7.5	215	184	734	335		OC	RSIR	10.8	211
FL1875-S*	7.5	208	178	710	310			F RSIR	11.9	216
FL1888-S*	8.8	207	178	707	300		OC	RSIR	11.2	216
FL2088-S*	8.8	256	220	874	380			F CSR	11.4	210
FL2088-S*	8.8	245	210	836	300		OC	RSCR	11.9	216
FL2088-S*	8.8	245	210	836	300		OC	CSIR	11.9	216
FL2088-S*	8.8	245	210	836	300		OC	RSIR	11.6	216



Private Picture Copyright : WWW.MBSM.PRO



Copyright : WWW.MBSM.PRO

HITACHI FL1568-SL

.220-240V 50Hz OIL 2008.09.26




SERIAL NO. 22592 HFC-134a

⚠ WARNING | HIGH TEMPERATURE
ELECTRIC SHOCK

DO NOT TOUCH M15

CIRCUIT DIAGRAM

GY...GRAY OR...ORANGE RD...RED PK...PINK
 VT...VIOLET BR...BROWN BL...BLUE BK...BLACK
 GN/YL...GREEN/YELLOW YL...YELLOW
 BK

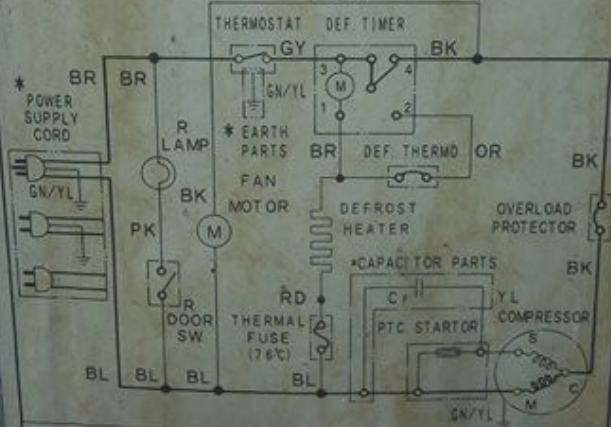

*THE PLUG TYPE CAPACITOR PARTS, EARTH PARTS ON CIRCUIT DIAGRAM ARE SUBJECTED TO CHANGE ACCORDING MODEL TYPE



Insulation Blowing Gas:
Cyclo-Pentane

N02



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

**QB73C12GAW5, 185W, 1/4Hp , RSIR, Q
Series PANASONIC (Reciprocating Fixed
Speed), R134a, LBP**

Category: compressor

written by www.mbsm.pro | 26 May 2020

Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	7.3
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	185
COP@ASHRAE	1.26/1.23
Capacity@CECOMAF	-
COP@CECOMAF	-

Private Picture Copyright: WWW.MBSM.PRO


QB73C12GAW5, 185W, 1/4Hp , RSIR, Q Series PANASONIC (Reciprocating Fixed Speed), R134a, LBP

**QB66C13GAX5 , KIRIAZI Electronic
,250L (Freezer capacity 64L),
Panasonic Compressor , 1/5Hp ,165W
,Low back pressure,R134a,
RSIR,220-240V/1/50Hz**

Category: compressor,Technologie,Tester ok
written by Jamila | 26 May 2020

V41GX 8814

ME3489960

QB66C13GAX5 R134a 

220V ~ 50Hz 1PH
THERMALLY PROTECTED

Matsushita Electric Industrial Co., Ltd.
Manufactured by Panasonic Refrigeration
Devices Malaysia Sdn. Bhd. Made in Malaysia

QB66C13GAX5 , KIRIAZI Electronic ,250L (Freezer capacity 64L), Panasonic Compressor , 1/5Hp ,165W ,Low back pressure,R134a, RSIR,220-240V/1/50Hz

COMPRESSEUR , Turkish Electric, NTU 170 MT, 220-240V 50Hz, R600A ,POUR REFRIGERATEUR ,BEKO ,1/4HP , LBP , LRA 12.4A ,197W, capacity 170KCal

Category: compressor

written by www.mbsm.pro | 26 May 2020

Spécifications	
Lieu de production	Turquie
Marque	Électrique turc
Type de compresseur	Piston hermétique
Régime de travail	LBP (-23,3 oC / 54,4 oC)
Puissance du compresseur (Hp)	1/3
Approvisionnement en électricité	220-240V
Fluide réfrigérant	R600a R600a
Capacité de refroidissement (Watt)	198
Type de moteur	Phase 1 - PTCSR
Boom.	-
Modèle compresseur	NTU170MT
Volume de balayage (cm3/rev)	11,55
Fréquence (Hz)	50
Ligne d'aspiration	1/4"
Ligne push	3/16"

Private Picture Copyright: WWW.MBSM.PRO

COMPRESSEUR , Turkish Electric, NTU 170 MT, 220-240V 50Hz, R600A ,POUR REFRIGERATEUR ,BEKO ,1/4HP , LBP , LRA 12.4A ,197W, capacity 170KCal

3/4HP (+Big, Cappacitor 10μF), CSR, Danfos , secop refrigerator freezer,

r134a, compressor, SC21G , 104G8140 ,
230 V 60Hz ,LBP / HBP, 21.8 A

Category: compressor

written by www.mbsm.pro | 26 May 2020



3/4HP (+Big Cappacitor 10 μ F), CSR, Danfos , secop refrigerator freezer, r134a,
compressor, SC21G , 104G8140 , 230 V 60Hz ,MBP

Compressor ELECTROLUX, CUBIGEL
,GP12TB ,Hermetic piston ,ACC ,HMBP ,
moteur HP , 3/8 HP++, 1/2 hp- , 1PH ,
R134A , Pression 1.7 Bar , 220V

Category: compressor,Technologie,Tester ok

written by www.mbsm.pro | 26 May 2020

	Model	Refr.	HP
▶ <input type="checkbox"/>	<u>GL45PB</u>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<u>GL45PB</u>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<u>GL45TB</u>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<u>GL60PB</u>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<u>GL60TB</u>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<u>GL80PB</u>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<u>GL80TB</u>	HMBP::R134a	F
▶ <input type="checkbox"/>	<u>GL90TB</u>	HMBP::R134a	1/4
▶ <input type="checkbox"/>	<u>GP12TB</u>	HMBP::R134a	3/8

Picture5 Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

Compressor ELECTROLUX, CUBIGEL GP12TB ,Hermetic piston ,ACC ,HMBP , moteur HP , 3/8 HP , 1PH , R134A , Pression 1.7 Bar