


3HP , 2CC-3.2 , Bitzer , Semi hermetic , Refrigeration , Compressor , for cold storage

Category: Technologie, Tester ok
written by www.mbsm.pro | 12 May 2020

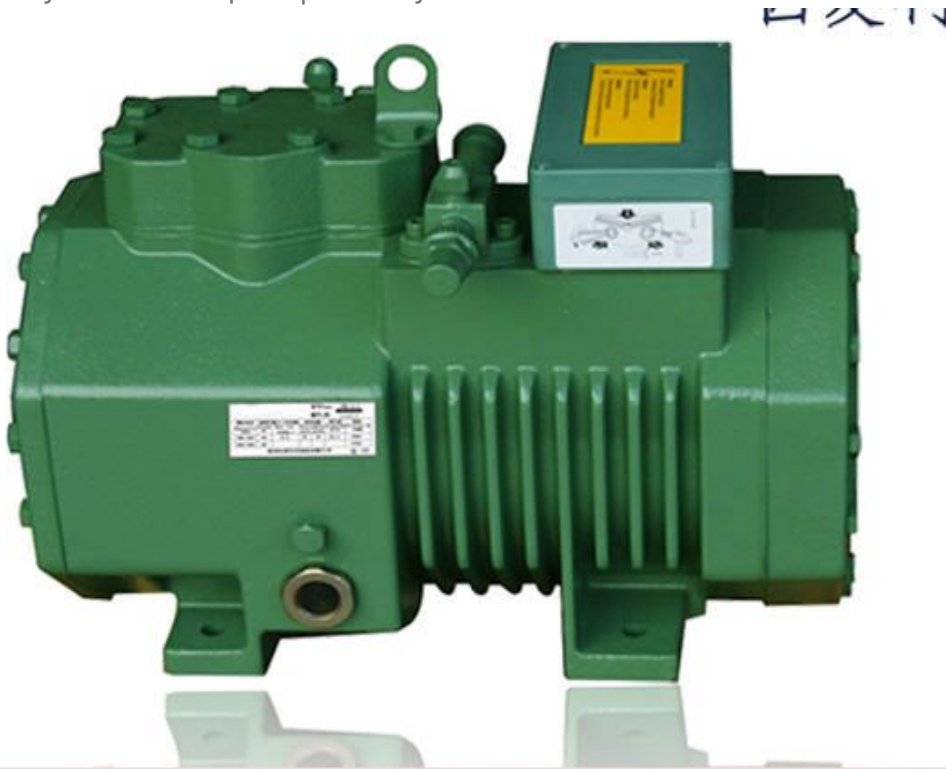

Private Picture Copyright: WWW.MBSM.PRO

3HP , 2CC-3.2 , Bitzer , Semi hermetic , Refrigeration , Compressor , for cold storage

NL10MF , 1/3 HP , 10,5kg 1/3HP
, Hermétique, Compressor , DANFOSS
, SECOP , R134a , 220-240V 50Hz ,
208-230V 60Hz , MBP (Medium Back
Pressure) , CSIR – RSIR (Resistance
Start – Capacitor Run)

Category: Technologie, Tester ok
written by www.mbsm.pro | 12 May 2020



Private Picture : www.MBSM.PRO

NL10MF ,1/3 HP ,10,5kg 1/3HP ,Hermétique,Compressor , DANFOSS ,SECOP ,R134a ,220-240V 50Hz , 208-230V 60Hz ,MBP (Medium Back Pressure) ,CSIR – RSIR

(Resistance Start – Capacitor Run)

Application Pour Les Pro Seulement , Soudure de Raccord De climatiseur A l'aide d'emboiture

Category: Technologie, Tester ok
written by www.mbsm.pro | 12 May 2020



Application For Pro Only, Air Conditioner Fitting Solder Using Socket

EMT36HLP , EMBRACO , ASPERA
, COMPRESSEUR FRIGORIFIQUE , 220/240V
50Hz , 1/10 HP , déplacement 3,97 ,
R134 , LBP

Category: Technologie, Tester ok
written by www.mbsm.pro | 12 May 2020



Private Picture : www.MBSM.PRO

EMT36HLP ,EMBRACO ,ASPERA ,COMPRESSEUR FRIGORIFIQUE ,220/240V 50Hz ,1/10 HP, déplacement 3,97 , R134 ,LBP

Compresseur, hermétique Daewoo
,HSL19JE-5, RLA 5.5 ,R134a LBP
220-240V / 50Hz , 144/155 W , 1/5 HP,
516 Btu ,RSIR

Category: Technologie,Tester ok
written by www.mbsm.pro | 12 May 2020

Series	Model	Displacement [cc/rev]	Power [W]	kcal/h	Watt	Btu/h	EFF	COP	EER	Motor Type	Compressor Type	Weight [kg]	Qty. [cc]
							kcal/Wh	W/W	Btu/Wh				
DS	DS22LHS8	2.18	57	37	43	147	1.54	0.75	2.58	RSIR	ST	6.0	180
	DS25LHS8	2.54	63	50	58	198	1.26	0.92	3.15	RSIR	ST	6.0	180
	DS30LHS8	3.06	78	69	80	274	1.13	1.03	3.51	RSIR	ST	6.0	180
WX	WX20LHSST	2.01	58	29	34	115	2.00	0.58	1.98	RSIR	ST	5.9	180
	WX24LHS5	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX24LHSST	2.54	64	40	47	159	1.60	0.73	2.48	RSIR	ST	5.9	180
	WX24LHS8	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX30LHS5	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHSST	3.06	88	59	69	234	1.49	0.78	2.66	RSIR	ST	5.9	180
	WX30LHS8	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHT5W	3.06	75	52	60	206	1.44	0.81	2.75	RSIR	ST	5.9	180
	WX35LHSST	3.51	98	64	74	254	1.53	0.76	2.59	RSIR	ST	5.9	180
	WX35LHT5W	3.51	99	64	74	254	1.55	0.75	2.57	RSIR	ST	5.9	180
Y	HPL7Y-5	2.65	62	50	58	198	1.24	0.94	3.20	RSCR	ST	6.7	230
	HPL9Y-5	3.43	76	58	67	230	1.31	0.89	3.03	RSCR	ST	6.7	230
	HPL11Y-5	4.51	89	80	93	317	1.11	1.05	3.57	RSCR	ST	7.0	230
	HSL5Y-5	2.29	65	35	41	139	1.86	0.63	2.14	RSIR	ST	6.3	230
	HSL5Y-5P	2.29	64	35	41	139	1.83	0.64	2.17	RSIR	ST	6.7	230
	HSL7Y-5	2.65	74	48	56	190	1.54	0.75	2.57	RSIR	ST	6.7	230
	HSL9Y-5	3.43	74	46	53	183	1.61	0.72	2.47	RSIR	ST	6.7	230
	HSL11Y-5	4.51	109	80	93	317	1.36	0.85	2.91	RSIR	ST	7.0	230
	HSL11Y-5A	4.51	102	85	99	337	1.20	0.97	3.31	RSIR	ST	7.0	230
	HSL11Y-5T	4.51	108	78	91	310	1.38	0.84	2.87	RSIR	ST	7.0	230
JE	HPL13JE-5	4.62	97	93	108	369	1.04	1.12	3.80	RSCR	ST/FC	7.4	230
	HPL15JE-5	5.12	107	107	124	425	1.00	1.16	3.97	RSCR	ST/FC	7.7	230
	HPL17JE-5	5.55	124	123	143	488	1.01	1.15	3.94	RSCR	ST/FC	7.7	230
	HPL19JE-5	5.84	124	134	156	532	0.93	1.26	4.29	RSCR	ST/FC	8.2	230
	HSL15JE-5	5.12	114	108	126	429	1.06	1.10	3.76	RSIR	ST/FC	7.7	230
	HSL15JE-5A	5.12	117	109	127	433	1.07	1.08	3.70	RSIR	ST/FC	7.7	230
	HSL15JE-5C	5.12	115	108	126	429	1.06	1.09	3.73	RSIR	ST/FC	7.8	230
	HSL17JE-5	5.55	129	126	147	500	1.02	1.14	3.88	RSIR	ST/FC	7.7	230
	HSL17JE-5A	5.55	129	121	141	480	1.07	1.09	3.72	RSIR	ST/FC	7.7	230
	HSL19JE-5	5.84	133	130	151	516	1.02	1.14	3.88	RSIR	ST/FC	8.2	230
HSL19JE-5A	5.84	141	135	157	536	1.04	1.11	3.80	RSIR	ST/FC	7.8	230	
JX41LHS5	4.09	101	89	104	353	1.13	1.02	3.50	RSIR	ST/FC	7.6	230	

Private Picture : www.MBSM.PRO

Compresseur, hermétique Daewoo ,HSL19JE-5, RLA 5.5 ,R134a LBP 220-240V / 50Hz , 133/144 W , 1/6HP, 516 Btu ,RSIR

ML90FB ,CUBIGEL ,R404A / R507, LBP, COMPRESSEUR HERMÉTIQUE ,1/3HP, 230V 50Hz

Category: Technologie,Tester ok
written by www.mbsm.pro | 12 May 2020



Private Picture : www.MBSM.PRO

ML90FB ,CUBIGEL ,R404A / R507, LBP, COMPRESSEUR HERMÉTIQUE ,1/3HP, 230V 50Hz

SECOP , R600 ,Compresseur de réfrigérateur, DLY9.4KK, 220/50Ht, 1/5 HP , 166w ,LBP

Category: Technologie,Tester ok
written by www.mbsm.pro | 12 May 2020



Private Picture : www.MBSM.PRO

SECOP , R600 ,Compresseur de réfrigérateur, DLY9.4KK, 220/50Ht, 1/5 , 166w ,LBP

Raccords , frigorifiques , climatiseur , Rapide A Souder

Category: Tester ok

written by www.mbsm.pro | 12 May 2020



Private Picture : www.MBSM.PRO

Raccords , frigorifiques , climatiseur , Rapide A Souder

Compresseur, Aspera – Embraco EMT
, EMT2121U, R290 , 1/3 HP , 220-240V 50
Hz , Cylindrée = 5.56 CM3 , Moteur
type: CSIR, 7.7LRA , Oil 180ML

Category: Technologie, Tester ok

written by www.mbsm.pro | 12 May 2020



Private Picture : www.MBSM.PRO

Compresseur, Aspera – Embraco EMT ,EMT2121U, R290 ,1/3 HP , 220-240V 50 Hz ,Cylindrée = 5.56 CM3 , Moteur type: CSIR,7.7LRA , Oil 180ML

Compressor ,Embraco Aspera ,NJ2212GK,
LBP – R404A, R507, 220-240V/1/50Hz,
1.5 HP, 34.38 cm3, LRA 36.0 A, CSR,
lubricant charge 750ml POE 22, 1547 W
,at -23.3 / +54.4 °

Category: Technologie,Tester ok
written by www.mbsm.pro | 12 May 2020



Private Picture Copyright : WWW.MBSM.PRO

Compressor ,Embraco Aspera ,NJ2212GK, LBP – R404A, R507, 220-240V/1/50Hz, 1.5 HP, 34.38 cm³, LRA 36.0 A, CSR, lubricant charge 750ml POE 22, 1547 W ,at -23.3 / +54.4 °