

DAEWOO Compressor , HSL25YE-5, 1/4HP, 1PH, R134a ,220-240V 50Hz, Puissance frigorifique, 204 W ,690 BTU

Category: Technologie, Tester ok

written by www.mbsm.pro | 30 April 2020



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO

Series	Model	Displacement [cc/rev]	Consumption Power [W]	Cooling Capacity			Efficiency			Motor Type	Cooling Type	Net Weight [kg]	Oil Qty. [cc]
				kcal/h	Watt	Btu/h	EFF kcal/Wh	COP W/W	EER Btu/Wh				
YH	HPL17YH-5	5.55	108	129	150	512	0.84	1.39	4.74	RSCR	ST/OC/FC	9.5	290
	HPL19YH-5	5.84	115	136	158	540	0.85	1.38	4.69	RSCR	ST/OC/FC	9.5	290
	HPL19YH-5A	5.84	115	136	158	540	0.85	1.38	4.69	RSCR	ST/OC/FC	9.5	290
	HPL21YH-5	6.73	129	152	177	603	0.85	1.37	4.68	RSCR	ST/OC/FC	9.5	290
	HPL23YH-5	7.03	139	166	193	659	0.84	1.39	4.74	RSCR	ST/OC/FC	9.5	290
	HPL25YH-5	7.96	155	194	226	770	0.80	1.46	4.97	RSCR	ST/OC/FC	9.5	290
YX	HPL26YH-5	8.25	164	205	238	814	0.80	1.45	4.96	RSCR	ST/OC/FC	9.5	290
	YX58LHP5	5.84	112	141	164	560	0.79	1.46	5.00	RSCR	ST/OC/FC	9.8	290
YG	HPL25YG1-5	7.68	153	180	209	714	0.85	1.37	4.67	RSCR	ST/OC/FC	9.5	290
	HPL27YG1-5	8.69	175	206	240	817	0.85	1.37	4.67	RSCR	ST/OC/FC	9.5	290
	HPL30YG-5	9.92	207	235	273	933	0.88	1.32	4.51	RSCR	ST/OC/FC	9.5	290
	HPL30YG-5A	9.92	208	228	265	905	0.91	1.27	4.35	RSCR	ST/OC/FC	9.5	290
	HSL25YG-5	7.68	175	185	215	734	0.95	1.23	4.20	RSP	ST/OC/FC	9.5	290
	HKL21YE-5	6.73	155	151	176	599	1.03	1.13	3.87	CSR	ST/OC/FC	9.0	290
YE	HKL23YE-5	7.03	162	159	185	631	1.02	1.14	3.89	CSR	ST/OC/FC	9.3	290
	HKL25YE-5	7.68	186	177	206	702	1.05	1.11	3.78	CSR	ST/OC/FC	9.5	290
	HKL27YE-5	8.69	200	200	233	794	1.00	1.16	3.97	CSR	ST/OC/FC	9.3	290
	HKL30YE-5	9.92	241	236	274	937	1.02	1.14	3.89	CSR	ST/OC/FC	9.5	290
	HPL27YE-5	8.69	180	204	237	810	0.88	1.32	4.50	RSCR	ST/OC/FC	9.5	290
	HPL30YE-5	9.92	211	228	265	905	0.93	1.26	4.29	RSCR	ST/OC/FC	9.5	290
	HSL27YE-ST1	8.69	197	205	238	814	0.96	1.21	4.13	RSP	ST/OC/FC	9.5	290
	HSL21YE-5	6.73	149	151	176	599	0.99	1.18	4.02	RSP	ST/OC/FC	9.0	290
	HSL23YE-5	7.03	161	155	180	615	1.04	1.12	3.82	RSP	ST/OC/FC	9.3	290
	HSL23YE-5B	7.03	161	155	180	615	1.04	1.12	3.82	RSP	ST/OC/FC	9.3	290
	HSL23YE-ST1	7.03	163	159	185	631	1.03	1.13	3.87	RSP	ST/OC/FC	9.3	290
	HSL25YE-5	7.68	176	174	202	690	1.01	1.15	3.92	RSP	ST/OC/FC	9.5	290
	HSL25YE-5A	7.68	168	169	197	671	0.99	1.17	3.99	RSP	ST/OC/FC	9.0	290
	HSL27YE-5	8.69	196	197	229	782	0.99	1.17	3.99	RSP	ST/OC/FC	9.5	290
	HSL27YE-5A	8.69	193	195	227	774	0.99	1.18	4.01	RSP	ST/OC/FC	9.5	290
	HSL30YE-5	9.92	253	230	267	913	1.10	1.06	3.61	RSP	ST/OC/FC	9.5	290
	HSL30YE-5B	9.92	239	229	266	909	1.04	1.11	3.80	RSCR	ST/OC/FC	10.4	290
	HPL25YE-5-K	7.68	171	175	203	694	0.98	1.19	4.05	RSCR	ST/OC/FC	9.0	290
	HPL27YE-5-K	8.69	196	199	231	790	0.98	1.18	4.03	RSCR	ST/OC/FC	9.0	290
	HPL30YE-5-K	9.92	207	221	257	876	0.94	1.24	4.22	RSCR	ST/OC/FC	9.0	290
DH	DH70LHP5	7.03	124	161	187	639	0.77	1.51	5.15	RSCR	FC	10.4	290
	DH80LHP5	7.89	143	189	220	750	0.76	1.54	5.24	RSCR	FC	10.4	290
	DH90LHP5	8.93	157	205	238	814	0.77	1.52	5.18	CSR	FC	10.4	290
	DH90LHK5	8.93	175	205	238	814	0.85	1.36	4.65	RSCR	FC	10.4	290
	DH99LHP5	9.92	234	309	359	1226	0.76	1.54	5.24	CSR	FC	10.4	290
DM	DM99LHK5	9.92	237	246	286	976	0.96	1.21	4.12	CSR	FC	10.4	290



PictureS Mbsm Dot Pro : www.mbsm.pro

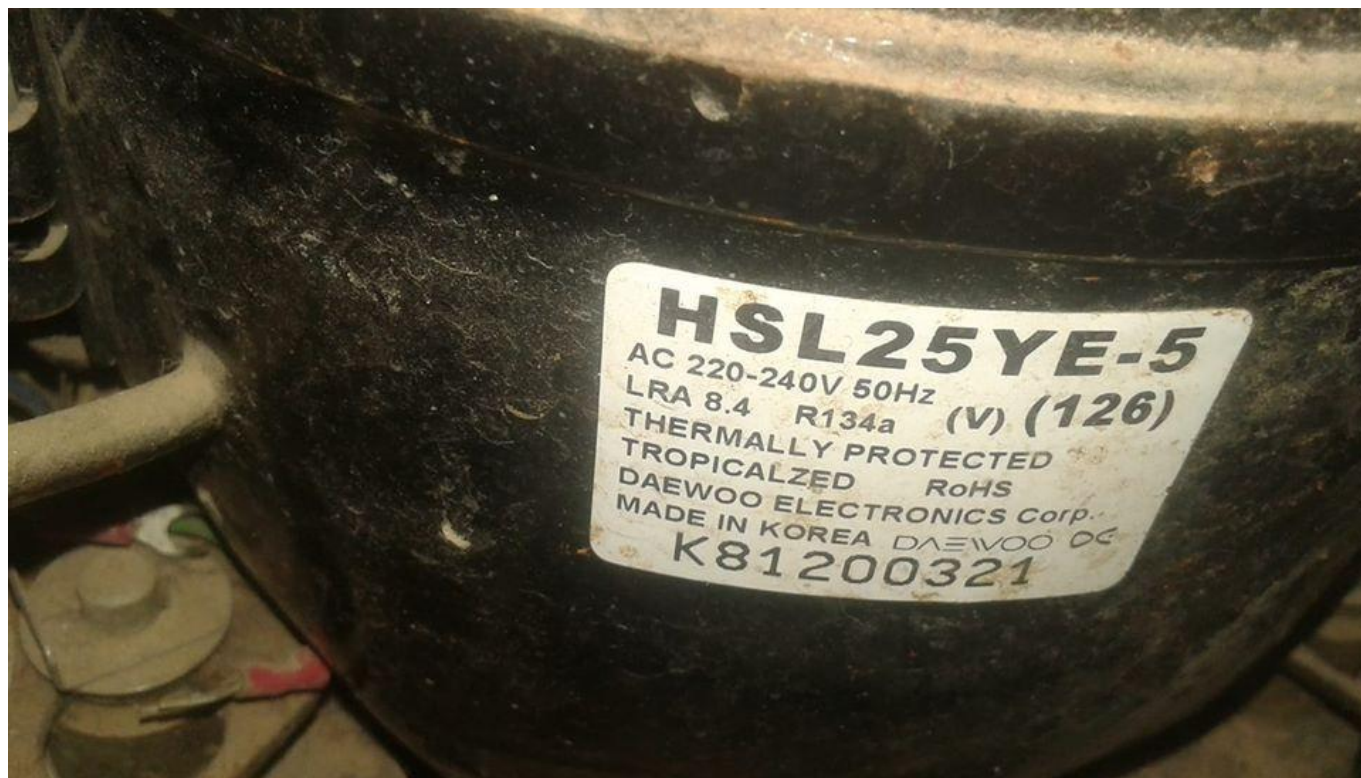

Private Picture : www.MBSM.PRO

PictureS Mbsm Dot Pro : www.mbsm.pro

Pdf Documentation

Mbsm_dot_pro_private_picture_hsl25ye-5Télécharger



HPL25YE-5-K

HPL30YE-5-K

Jx58lhs5-k, DAEWOO COMPRESSOR ,FOR REFRIGERATOR ,1/5 Hp , 220/240 V , R134A,

DAEWOO COMPRESSOR FOR REFRIGERATOR

* R134a / LBP

- ORIGIN : KOREA

RATED VOLTAGE [V-Hz]	HP	MODEL	MOTOR TYPE	COOLING CAPACITY[W]	POWER INPUT [W]	COP [W/W]	COOLING TYPE
220/240-50	1/5	JX58LHS5-K	RSIR	163	145	1.12	ST
	1/4	HPL25YE-5-K	RSCR	203	171	1.19	ST
	1/3	HPL30YE-5-K	RSCR	257	207	1.24	ST

Private Picture Copyright : WWW.MBSM.PRO

Model	Cooling Capacity			Efficiency			Motor Type	Cooling Type	NetWeight [kg]	OilQty [cc]
	Kcal/h	Watt	Btu/h	EFF Kcal/Wh	COP W/W	EER Btu/Wh				
DM10LHS5	30	35	119	0.65	0.76	2.59	RSIR	ST	3.6	100
DM15LHS5	41	48	164	0.77	0.9	3.07	RSIR	ST	3.6	100
DM20LHS5	48	56	191	0.86	1	3.41	RSIR	ST	3.6	100
DM24LHS5	56	65	222	0.9	1.05	3.58	RSIR	ST	3.7	100
DM30LHS5	64	75	256	0.82	0.95	3.24	RSIR	ST	3.9	100
WX24LHS5W-K	41	48	163	0.53	0.72	2.10	RSIR	ST	6.1	180
WX24LHS5T	41	48	163	0.64	0.73	2.54	RSIR	ST	5.9	180
WX24LHS5T-K	41	48	163	0.53	0.62	2.12	RSIR	ST	5.9	180
WX30LHS5T	60	70	238	0.71	0.77	2.83	RSIR	ST	5.9	180
WX30LHS5W-K	60	70	238	0.68	0.79	2.71	RSIR	ST	6.1	180
JX41LHP5-K	91	106	361	0.96	1.11	3.79	RSCR	ST/FC	7.9	230
JX41LHS5	91	106	361	0.90	1.05	3.58	RSIR	ST/FC	7.6	230
JX46LHS5	109	127	433	1.11	1.41	4.41	RSIR	ST/FC	8	230
JX51LHP5-K	125	145	496	1.01	1.17	4.00	RSCR	ST/FC	8	230
JX51LHS5	125	145	496	0.91	1.14	3.62	RSIR	ST/FC	8.2	230
JX51LHT5	125	145	496	1.03	1.2	4.10	RSIR	ST/FC	8.2	230
JX55LHP5-K	132	154	524	1.01	1.17	4.00	RSIR	ST/FC	8.2	230
JX55LHS5-K	132	154	524	0.96	1.12	3.82	RSIR	ST/FC	7.7	230
JX58LHK5	151	176	599	1.09	1.18	4.31	CSIR	ST/FC	8.2	230
JX58LHP5	151	176	599	1.27	1.37	5.04	RSCR	ST/FC	8.2	230
JX58LHP5-K	151	176	599	1.23	1.22	4.87	RSCR	ST/FC	7.4	230

Private Picture Copyright : WWW.MBSM.PRO

Model	Cooling Capacity			Efficiency			Motor Type	Cooling Type	NetWeight [kg]	OilQty [cc]
	Kcal/h	Watt	Btu/h	EFF Kcal/Wh	COP W/W	EER Btu/Wh				
JX58LHS5	151	176	599	1.03	1.18	4.08	RSIR	ST/FC	8.2	230
JX58LHP5-K	151	176	599	1.04	1.13	4.13	RSIR	ST/FC	7.4	230
JX58LHS5A	151	176	599	1.01	1.09	3.99	RSIR	ST/FC	7.4	230
GD53LHP5	138	160	548	1.50	1.75	5.97	RSCR	ST	8.4	150
GD53LHP5-K	138	160	548	1.44	1.68	5.73	RSCR	ST	8.4	150
GD53LHP5-L	138	160	548	1.42	1.65	5.63	RSCR	ST	8.4	150
GD57LHP5	149	173	591	1.50	1.75	5.97	RSCR	ST	8.9	150
GD57LHP5-K	149	173	591	1.44	1.68	5.73	RSCR	ST	8.4	150
GD57LHP5-L	149	173	591	1.42	1.65	5.63	RSCR	ST	8.4	150
GD63LHP5	167	194	663	1.50	1.75	5.97	RSCR	ST	8.9	150
GD63LHP5-K	167	194	663	1.44	1.68	5.73	RSCR	ST	8.4	150
GD63LHP5-L	167	194	663	1.42	1.65	5.63	RSCR	ST	8.4	150
GD69LHP5	179	208	710	1.50	1.75	5.97	RSCR	ST	8.9	150
GD69LHP5-K	179	208	710	1.44	1.68	5.73	RSCR	ST	8.4	150
GD69LHP5-L	179	208	710	1.42	1.65	5.63	RSCR	ST	8.4	150
HPL21YE-5-K	155	180	615	1.00	1.16	3.97	RSCR	ST/OC/FC	9	290
HPL21YE-5-L	155	180	615	1.04	1.2	4.11	RSCR	ST/OC/FC	8.9	290
HSL21YE-5	155	180	615	1.04	1.21	4.13	RSIR	ST/OC/FC	9	290
HPL23YE-5	171	199	635	1.1	1.27	4.35	RSCR	ST/OC/FC	9.5	290
HPL23YE-5-K	171	199	679	1.14	1.19	4.52	RSCR	ST/OC/FC	9	290
HSL23YE-5	171	199	679	1.06	1.16	4.21	RSIR	ST/OC/FC	9.3	290

Private Picture Copyright : WWW.MBSM.PRO



Model	Cooling Capacity			Efficiency			Motor Type	Cooling Type	NetWeight [kg]	OilQty. [cc]
	Kcal/h	Watt	Btu/h	EFF Kcal/Wh	COP W/W	EER Btu/Wh				
HPL25YE-5-L	180	209	714	1.07	1.31	4.23	RSCR	ST/OC/FC	9	290
HGH25YE-5	631	734	2504	1.88	2.19	7.47	CSIR	OC/FC	9.5	290
HKL27YE-5	210	244	833	1.01	1.17	4.27	CSIR	ST/OC/FC	9.5	290
HPL27YE-5	210	244	833	1.01	1.31	4.63	RSCR	ST/OC/FC	9.5	290
HPL27YE-5-K	210	244	833	1.01	1.2	4.90	RSCR	ST/OC/FC	9	290
HSL27YE-5	210	244	833	1.01	1.2	4.32	RSIR	ST/OC/FC	9.5	290
HSL27YE-5A	210	244	833	1.01	1.22	4.32	RSIR	ST/OC/FC	9.5	290
HKH27YE-5	732	851	2817	1.92	2.23	7.61	CSIR	OC/FC	9.5	290
HS27YE-5	732	851	2817	1.88	2.19	7.47	RSIR	OC/FC	9.5	290
HKL30YE-5	230	267	913	1.01	1.1	3.61	CSIR	ST/OC/FC	9.5	290
HPL30YE-5-K	230	267	913	1.01	1.28	4.75	RSCR	ST/OC/FC	9	290
HSL30YE-5	230	267	913	1.01	1.05	3.61	RSIR	ST/OC/FC	9.5	290
HS30YE-5	780	907	3095	1.01	2.13	6.57	RSIR	OC/FC	9.5	290
HKL30YE-5	230	267	913	1.01	1.1	3.61	CSIR	ST/OC/FC	9.5	290
HPL30YE-5-K	230	267	913	1.01	1.28	4.41	RSCR	ST/OC/FC	9	290
HSL30YE-5	230	267	913	1.01	1.05	3.61	RSIR	ST/OC/FC	9.5	290
NW52LHP5-L	139	162	552	1.01	1.6	5.63	RSCR	ST/FC	8.7	230
NW60LHP5-L	147	171	583	1.01	1.54	5.40	RSCR	FC	9.6	230
NW70LHP5-L	171	199	679	1.01	1.6	5.32	RSCR	FC	9.6	230
NW80LHP5	206	240	794	1.39	1.62	5.51	RSCR	FC	9.6	230
NW90LHP5-L	206	240	817	1.01	1.56	5.49	RSCR	FC	9.6	230

