

Réfrigerant Pressure Détails, Pression de Recharge Gaz, ضغوطات غاز التبريد عند الشحن

Category: Arabe, Chaud & Froid

written by www.mbsm.pro | 3 December 2021

Réfrigerant Pressure Détails

Refrigerant Pressure Details

By ACTech / All AC Error code

Refrigerant Name	Standing Pressure	Suction Pressure	Discharge Pressure	Chemical name	Boiling Point
R 22	150 – 160 psi	60 – 70 psi	250 – 300 psi	Chlorodifluoromethane CHClF ₂	–40.7 °C (–41.3 °F; 232.5 K)
R134A	80 – 90 psi	12 – 18 psi Refrigeration	140 psi	Tetrafluoroethane CF ₃ CH ₂ F	–26.3 °C (–15.3 °F; 246.8 K)
R600A	40 psi	Below 0 psi (In Vacuum)	150 psi	Isobutane (CH ₃) ₃	–11.7 °C (10.9 °F; 261.4 K)
R32	245 – 255 psi	110 to 120 psi	300 – 350 psi	Difluoromethane CH ₂ F ₂	–52 °C (–62 °F; 221 K)
R290	130 – 135 psi	65 – 70 psi	275 – 300 psi	Propane C ₃ H ₈	–42.25 °C; (–44.05 °F; 230.90 K)
R407C	180 – 190 psi	75 – 80 psi	280 – 300 psi	Mixture of hydrofluorocarbons R-32/125/134a (23±2/25±2/52±2)	–43.8 °C
R404A	180 – 185 psi	85 – 90 psi	275 – 295 psi	HFC "nearly azeotropic" R-125/143a/134a (44±2/52±1/4±2)	–46.5 °C
R417A	140 psi	65 psi	270 psi	Mixture of R-125/134a/600 (79±1/18.3±1/2.7±1, –.5)	–39 °C
R410A	230 – 250 psi	110 – 125 psi	450 – 510 psi	Mixture of R-32/125 (50±.5, –1.5/50±1.5, –.5)	–51.4 °C

Private Picture Copyright : WWW.MBSM.PRO

Fully4World

Some Refrigerant Standing, Suction, Discharge Pressure & Boiling Temperature List.

Refrigerant Name	Standing Pressure	Suction Pressure	Discharge Pressure	Boiling Temp
R-22	150-155 psi	60-70 psi	250-300 psi	-40.8 C
R-410a	225-230 psi	120-130 psi	450-500 psi	-51.4 C
R-134a	85-95 psi	12-15 psi		-26.2 C
R-600a	40-50 psi	Below 0-1 psi		-11.7 C
R-32	240-245 psi	110-115 psi		-52.0 C
R-290	125-130 psi	65-70 psi	275-300 psi	-42.1 C
R-407c	180-185 psi	75-80 psi	275-300 psi	-45.0 C
R-404a	180-185 psi	80-90 psi		-46.2 C
R-417	140 psi	65 psi	261 psi	

Private Picture Copyright : WWW.MBSM.PRO

Compressor, r600a, 1/5HP, LBP, 149W, htk12aa, Electrolux, Brandt, 220-240V 50Hz, Run Capacitor: 4.0 μ F (5.0 μ F

as alternative) , Motor type RSCR/RSIR

Category: compressor

written by www.mbsm.pro | 3 December 2021

compressor/compressor ACC – Electrolux HTK12AA, LBP – R600a, Power consumption 1/5HP++, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 11.1 cm³, Oil type mineral oil, Oil quantity 170 cm³, Power 116 W at -25 / +55°C, Power consumption 149 W, Current 0.77, Weight 8.6Cooling capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
300	240	188	144	107	78

Shipping Class	Standard
Scope Of Application	LBP
Lieferzeit	2-3 Wochen
Type Of Construction	Piston
Condensation Temperature	55°C
Maker	ACC
Manufacturer No.	HPY12AA
Displacement In Cm3	11.1
Measuring Requirements	Ashrae
Refrigerants	R600a
Series	HPY
Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	12.7

1. Be the first to review this product

[Mbsm_dot_pro_private_PDF_HTK12AA-1-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_HTK12aa-1Télécharger](#)



Private Picture Copyright : WWW.MBSM.PRO

Verdichter - Cubigel

R-600a, LBP

Hermetische Verdichter für Kapillarrohrbetrieb.
Hochleistungs-Verdichter mit Betriebskondensatoren.
LBP Temperaturbereich -30 °C bis -10 °C.
Netzspannung 220 - 240 V / 50 Hz.



Artikelnr.	Typ	Leistung (PS)	Kälteleistung [W] T _s -25 °C, T _k +45 °C
			-25
47-32 HQY45AA	HQY 45 AA	1/12	52
47-32 HQY55AA	HQY 55 AA	1/9	62
47-32 HQY70AA	HQY 70 AA	1/8	80
47-32 HQY80AA	HQY 80 AA	1/7	99
47-32 HQY90AA	HQY 90 AA	1/7	109
47-32 HQY99AA	HQY 99 AA	1/6	119
47-32 HPY12AA	HPY 12 AA	1/5	144
47-32 HPY14AA	HPY 14 AA	1/5	166
47-32 HPY16AA	HPY 16 AA	1/4	181

Gesamtkatalog jetzt anfordern unter info@kaeltepartner.net!

 Hinweis: Bilder Können vom Produkt abweichen

Private Picture Copyright: WWW.MBSM.PRO

Cabine de douche carré 80cm Décors PALMIER

Category: Plomberie

written by www.mbsm.pro | 3 December 2021

Cabine de douche carré 80cm Décors PALMIER





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compressor, FLB075LBNA, LG-Original
New Linear Refrigerator Compressor,
LG-compressor, Inverter 0~220V 53Hz,
R134a(165g), LSXC22386, LSXC22326,
LSXC22336, 1/4HP

Category: compressor

written by www.mbsm.pro | 3 December 2021

FLS075LANA is the new **compressor** model number It replaces these older **LG/Kenmore**
Elite **compressor** versions: FC75LBNA FLA075LANA FLB075LANA **FLB075LBNA**

Compressor Fls075lana_replacement A: Fla075lana, Flb075lana

Compressor, FLB075LBNA, LG-Original New Linear Refrigerator Compressor, LG-compressor, Inverter 0~220V 53Hz, R134a(165g), LSXC22386, LSXC22326, LSXC22336, 1/4HP

New version LG Compressor part # TCA38091801 & Software Jig TCA35911910

Compressor has a purple decal and red decal on top warning about the software update.

FLS075LANA is the new compressor model number

It replaces these older LG/Kenmore Elite compressor versions:

FC75LBNA

FLA075LANA

FLB075LANA

FLB075LBNA







SEARS BRANDS
MANAGEMENT CORPORATION
HOFFMAN ESTATES, IL 60179

HOUSEHOLD REFRIGERATOR/
REFRIGÉRATEUR MENAGERE

MODEL/MODÈLE : 795.73153.610



RATING/CAPACITÉ NOMINALE 115V ~ 60Hz 2.9A

REFRIGERANT/RÉFRIGÉRANT R134a 5.11oz

DEFROSTING INPUT / PUISSANCE ABSORBÉE EN DÉGIVRAGE 360W

POWER INPUT OF DEFROST HEATER /

PUISSANCE ABSORBÉE DE LA RÉSISTANCE DE DÉGIVRAGE

FREEZER/CONGÉLATEUR 350W

PRODUCTION DATE / DATE DE PRODUCTION 2016.04

DIMENSIONS 35 3/4(W) x 36 1/4(D) x 70 1/4(H) inch

DESIGN PRESSURES/ HIGH SIDE/ CÔTÉ SUPÉRIEUR 400PSI Ga

PRESSION DE DESSIN LOW SIDE/ CÔTÉ INFÉRIEUR 140PSI Ga

SER.No./NO.DE SÉRIE:

MADE IN KOREA
FABRIQUÉ EN CORÉE



604KR00971



For SEARS REPAIR SERVICE
CALL 1-844-553-6667

AU CANADA POUR SERVICE EN
FRANÇAIS 1-800-LE-FOYER^{MC}

24HOURS A DAY,

7 DAYS A WEEK FOR SEARS
REPAIR SERVICE

LE SERVICE DE REPARATION

SEARS CANADA


VINGT-QUATRE HEURES PAR JOUR,
SEPT JOURS PAR SEMAINE.

TAB37097603





Name Plate

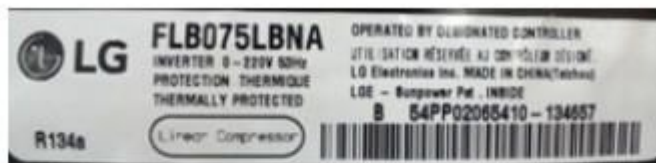


Size : 90mm X 20mm



Private Picture Copyright : WWW.MBSM.PRO


Compressor Label

1. Compressor Model

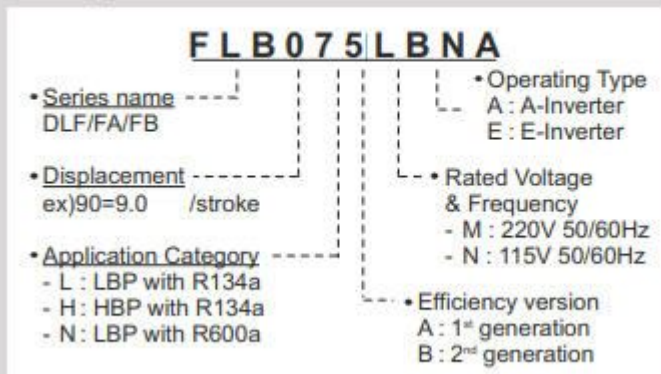

2. Refrigerant

3. Serial Number

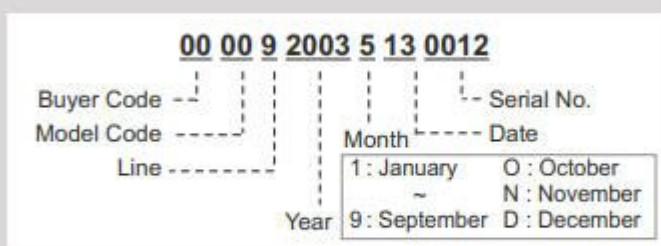

Private Picture Copyright : WWW.MBSM.PRO

Defrost	End	Auto	
	Evaporation	Forced method	
	Type of heat shield	Cyclo-Pentane	
F-Room	Fixed Shelf	3	
	Drawer	2	
R-Room	Fixed Shelf	4	
	Shelf(Movable, Folding)	-	
	Egg container	-	
	Vegetable room	2	
Freezing cycle	Compressor driving method	A Logic Inverter operation	
	Evaporation	Pin tube type	
	Condenser	Forced convection method	
	F-Room oil	Freol Alpha5 oil(175cc)	
	Type of refrigerant	R134a(165g)	
	Capillary tube	Φ 0.7/0.9	
	Dryer (drying tube)	MOLECULAR SIEVE XH-9	
Electrical parts		Initial defrost	4~5 hours (vary depending on condition)
		Defrost cycle	9~11 hours (vary depending on condition)
		Rest time	3 Min
		Defrost sensor	Returend to defrost function when reaching to 5°C
		Temp.fuse (rated/ operation temperature)	250V / 72°C
		Heater Sheath	AC 115V / 260W
	Parts related with dewing prevention	Dispenser duct door heater	-
		R-Room home bar heater	120V / 6.5W
		F-Room home bar heater	-
		Dispenser heater	DC 12V / 2.5W
	Capacitor	Comp' Running	AC 450V / 20 μF
		l/maker geared motor Running	AC 250V / 14 μF

Private Picture Copyright : WWW.MBSM.PRO

Embraco, VEGY 8H, VEGZ 8H, Inverter Compressor, R134A, Refrigerator General Electric,110, 1/4++ HP, 1/3 hp, Variable Speed Compressor

Category: compressor

written by www.mbsm.pro | 3 December 2021

Embraco, VEGY 8H, Inverter Compressor, R134A, Refrigerator General Electric,110, 1/4 HP,Variable Speed Compressor



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Caj4492A, R12, Tecumseh, Refrigeration, Compressor, 3/4HP, Medium/High Back Pressure

Category: compressor

written by www.mbsm.pro | 3 December 2021



Private Picture Copyright: WWW.MBSM.PRO

Caj4492A, R12, Tecumseh, Refrigeration, Compressor, 3/4HP, Medium/High Back Pressure

COMPRESSOR, EMBRACO, EGAS100HLP, EGAS 100 HLP, EGAS 100HLP, R-134, -23.3 C, 243 W, sharp sj-48c, 384 LITRE, 1/4++ or 1/3hp, 220-240 V 50 Hz

Category: compressor

written by www.mbsm.pro | 3 December 2021



Private Picture Copyright : WWW.MBSM.PRO

COMPRESSOR, EMBRACO, EGAS100HLP, EGAS 100 HLP, EGAS 100HLP, R-134, -23.3 C, 243 W, sharp sj-48c, 384 LITRE, 1/4++ or 1/3hp, 220-240 V 50 Hz

Danfoss, secop, refrigerator,
compressor, SC15G, 104G8520, R134a,
3/8HP, 1ph/220V-240/50HZ

Category: compressor

written by www.mbsm.pro | 3 December 2021



Private Picture Copyright : WWW.MBSM.PRO

3/8HP Danfoss secop refrigerator compressor SC15G 104G8520 for R134a

Main features:

1. Adopt high efficient rotary compressor and Japan made motors, save power 10% or above.
2. The horizontal designed series can save much space.
3. Optimized design can be tightly built inside the equipment,

which can save installation time and labor cost.

4. Widely used in freezing storage, cold room, automatic vendor machine, cold tanks on the ship, etc. as well as in the home use, commercial, refrigerator, refrigeration machine, dehumidifier, low-temperature laboratory device and some special refrigeration equipment.

Available models and details for secop compressor:

Model	Gas	Qty/pallet	HP	Voltage	Code	Details
SC10C	R22	80	1/3	1ph/220V-240/50HZ	104L2516	MLBP HST
SC12C	R22	80	3/8	1ph/220-240V/50HZ	104L2674	MLBP HST
SC15CM	R22	80	1/2	1ph/220V-240V/50HZ	104L2848	MLBP HST
SC18CM	R22	80	5/8	1ph/220-240V/50HZ	104L2120	MLBP HST
SC10D	R22	80	3/8	1ph/220-240V/50HZ	104L2529	MHBP HST
SC12D	R22	80	1/2	1ph/220-240V/50HZ	104L2694	MHBP HST
SC15D	R22	80	5/8	1ph/220-240V/50HZ	104L2859	MHBP HST
SC10CL	R404A	80	1/3	1ph/220-240V/50HZ	104L2523	LMBP HST
SC12CL	R404A	80	3/8	1ph/220-240V/50HZ	104L2623	LMBP HST
SC15CL	R404a	80	1/2	1ph/220-240V/50HZ	104L2853	LMBP HST
SC18CL	R404a	80	5/8	1ph/220V-240V/50HZ	104L2123	LMBP HST
SC21CL	R404a	80	7/8	1ph/220-240V/50HZ	104L2322	LBP HST
SC10G	R134a	80	5/16	1ph/220-240V/50HZ	104G8000	LMHBP HST
SC12G	R134a	80	1/3	1ph/220-240V/50HZ	104G8240	LMHBP HST
SC15G	R134a	80	3/8	1ph/220V-240V/50HZ	104G8520	LMHBP HST
SC18G	R134a	80	1/2	1ph/220-240V/50HZ	104G8820	LMHBP HST
SC21G	R134a	80	5/8	1ph/220-240V/50HZ	104G8140	LMHBP HST




Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_sc15g_104g8520_r134a_220v_50hz_60hz_01-2013_desd402k302
Télécharger

Compressor, Danfoss, Secop, SC18G, 104g8822, 1/2HP, R134A, 685 Litres, Presentoire cokacolla, LBP/HBP

Category: compressor

written by www.mbsm.pro | 3 December 2021

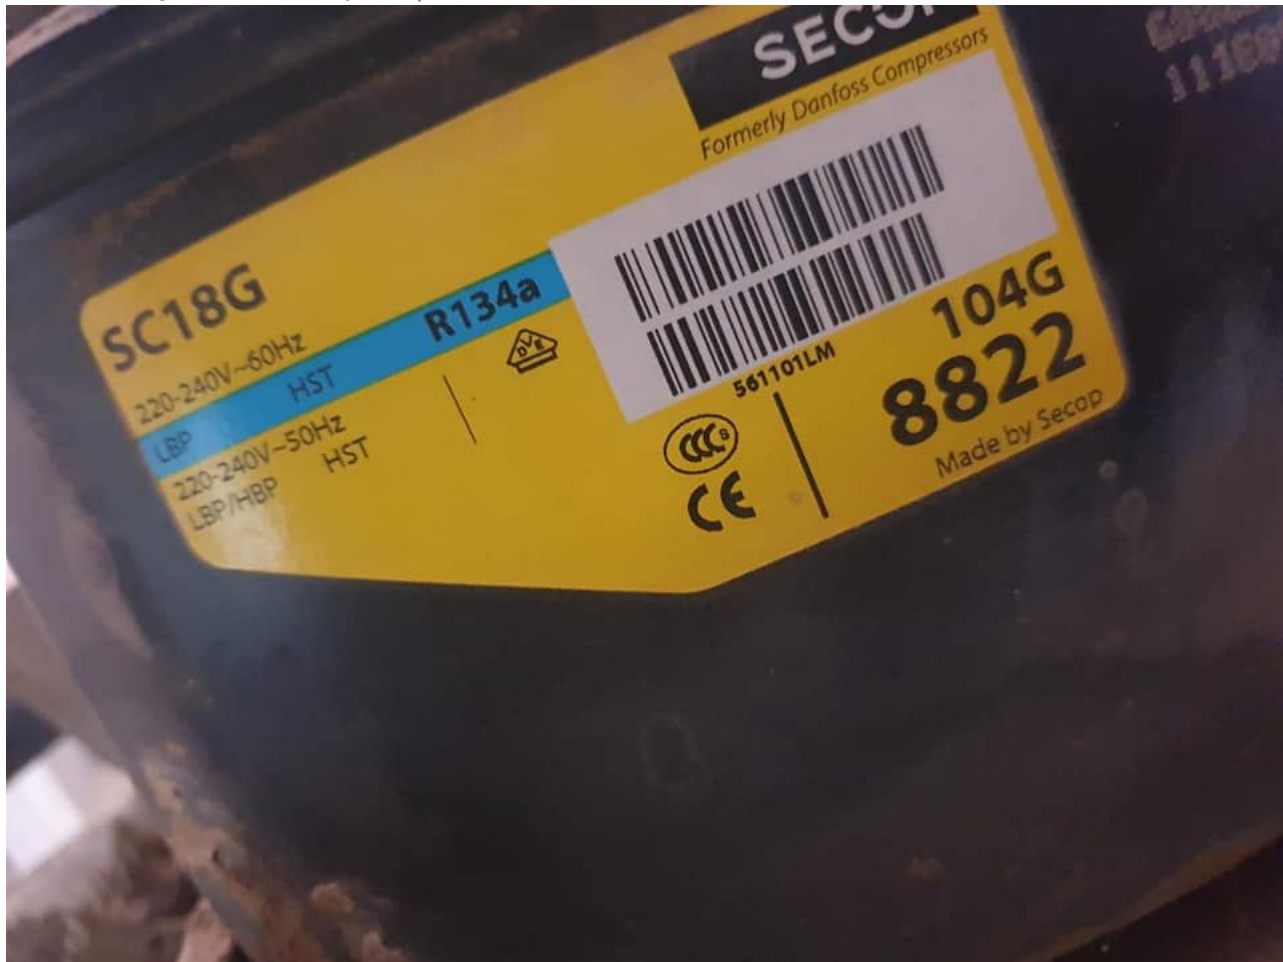

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

OverviewQuick detailsType :compressorBrand Name :SECOPModel Number :
ASC18GCertification :CE, CCCAfter-sales service provided :No overseas service
provided.Gas :R134aType :PistonPower Source :AC PowerLubrication
Style :LubricatedMute :YesPackage :wooden case or cartonApplication :Danfoss
Freezer CompressorDelivery time :7-20 DaysSpecial period :1 monthSupply
AbilitySupply Ability3000 Piece / Pieces per MonthPackaging and
shippingPackaging Details1.For small order quantity: packed with a wooden case
or carton.

2.For full container: packed with pallet, 24 pallets in one 20ft
container.postureGuangZhou, huangpu portProcessing time:: A.7-30 days

1.Product name:

1, Danfoss refrigeration / refrigeration compressor SC18G

2.Type: LBP 3.Voltage

: 220 ~ 240V / 50Hz, 1 / 2HP

No	Model	HP	Temperature	Electricity	Refrigerant
1	SC10C	1/3	LBP	220~240V/50HZ	R22
2	SC12C	3/8	LBP	220~240V/50HZ	R22
3	SC15CM	1/2	LBP	220~240V/50HZ	R22
4	SC18CM	5/8	LBP	220~240V/50HZ	R22
5	SC10D	3/8	MBP	220~240V/50HZ	R22
6	SC12D	1/2	MBP	220~240V/50HZ	R22
7	SC15D	5/8	MBP	220~240V/50HZ	R22
8	SC10G	5/16	MBP	220~240V/50HZ	R22
9	SC12G	1/3	MBP	220~240V/50HZ	R134A
10	SC15G	3/8	MBP	220~240V/50HZ	R134A
11	SC18G	1/2	MBP	220~240V/50HZ	R134A
12	SC21G	5/8	MBP	220~240V/50HZ	R134A
13	SC10CL	1/3	LBP	220~240V/50HZ	R404a
14	SC12CL	3/8	LBP	220~240V/50HZ	R404a
15	SC15CL	1/2	LBP	220~240V/50HZ	R404a
16	SC18CL	5/8	LBP	220~240V/50HZ	R404a
17	SC21CL	7/8	LBP	220~240V/50HZ	R404a

Private Picture Copyright : WWW.MBSM.PRO

4. Gas consumption: R134a



Everest

Number	: 1117825	Model	: EV 024 SD		
Volume	: 1.2 CBM	Capacity	: 685 LTRS		
Weight	: 157 KG	Color/Logo	: RED		
Consumption	: 14 Kwh/24 hrs	Date	: DEC 2011		
0 Hz	: 50	Ref. Type	: R134A	GRMS	: 475
2 Watt	: 646	Climate Class	: D		
Capacity at 0 Deg.C evaporator temperature: 980					



Lightage of Lamps: 20(TOP) 40(SIDE)

MADE IN EGYPT



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

AHT

Innenraumbeleuchtung
Light inside cabinet

(+)

220-240V/50Hz

480 W

50 W

2.6 A

0.21 A

IP 21

IP 21

8 825

LE221

9.2 kWh/24h

16 A

R404A/D, 250 kg

724 dm³

7-24 2014

Suppression max. de service admis
Sécurité propre selon VVV-VBG 7
Imperméabilité examinée



consignes locales de la mise au rebut.
Faites attention de ne pas endommager

Compressor, 103U2954, Danfoss, fr10B,
103u, 2954, 1/3 HP, lbp, r12, FR10B
COMPRESSOR 220V, 103U2954FR10B, FR11B
Compressor R-12 3/8 HP 230V, fr21b
Compressor R134a 3/4 HP++/ 1 hp-,
230V, hbp++

Category: compressor

written by www.mbsm.pro | 3 December 2021



Compressor, 103U2954, Danfoss, fr10B, 103u, 2954, 1/4 HP, lbp, r12, FR10B
COMPRESSOR 220V, 103U2954FR10B