Mbsm.pro, Compressor, R600a, PZ59E1C, 1/8 Hp, 95 W, Lbp

Category: compressor
written by www.mbsm.pro | 31 January 2022

Mbsm.pro, Compressor, R600a, PZ59E1C, 1/8 Hp, 95 W, Lbp

Mbsm.pro, Compressor, Samsung, MSV162AL1J/TS, MSV162, MSV162A-L1B, Compressor Inverter, Block DC, 1200/4000 RPM, 70/244 W, 238/834 BTU, Lnb, 1/3 hp, R134A, Blcd

Category: compressor
written by www.mbsm.pro | 31 January 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Samsung, MSV162AL1J/TS, MSV162, MSV162A-L1B, Compresseur Inverter, Block DC, 1200/4000 RPM, 70/244 W, 238/834 BTU, Lnb, 1/3 hp, R134A, Blcd

---

Mbsm.pro, Compressor, Tecumseh, TAH4518A, 1.5 Hp, HBp, R12, 440V 3~ 60Hz 400V 3~ 50Hz, 1684 W, 14048 btu

Category: compressor
written by www.mbsm.pro | 31 January 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Tecumseh, TAH4518A, 1.5 Hp, HBp, R12, 440V 3~ 60Hz 400V 3~ 50Hz, 1684 W, 14048 btu

الطريقة الصحيحة والوحيدة لحساب قدرة ضواغط تي .. The Only Correct And Reliable Way To Calculate The Capacity Of TEE Compressors.

Category: Arabe,Chaud&Froid
written by www.mbsm.pro | 31 January 2022

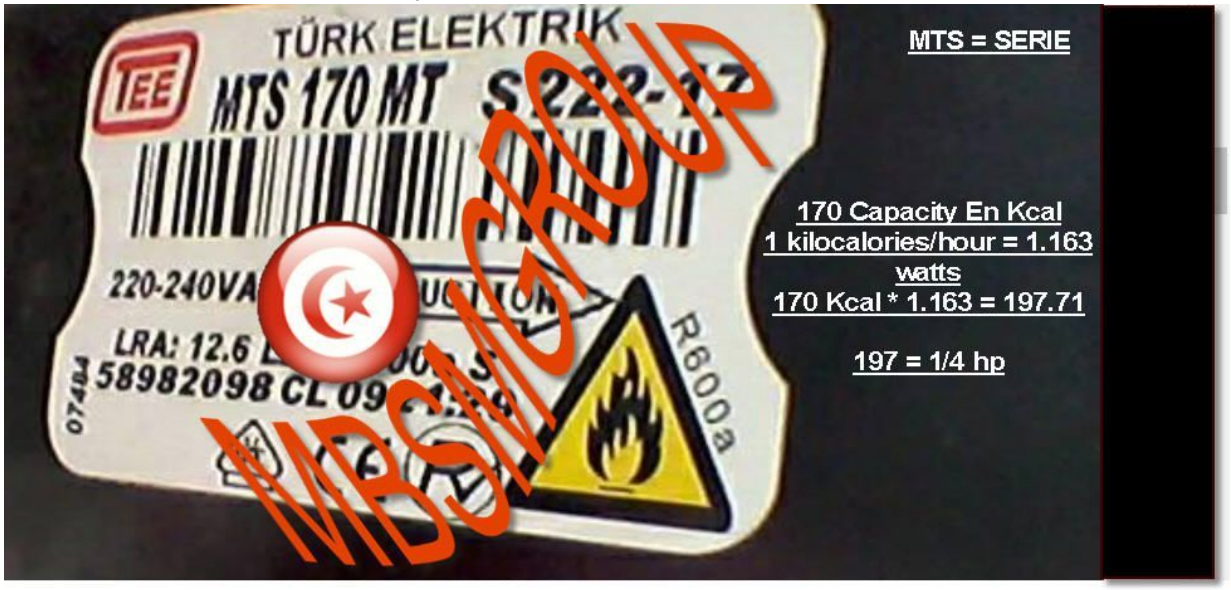

Picture Private Copyright WWW.MBSMGROUP.TN
Private Picture Copyright : WWW.MBSM.PRO

الطريقة الصحيحة والوحيدة لحساب قدرة ضواغط تي .. The Only Correct And Reliable Way To Calculate The Capacity Of TEE Compressors.

Mbsm.pro, Compressor, 4ec-6.2-4os, 6HP, Bitzer Piston Compressor, 4ces-6, Refrigeration Compressor , 4ec-6.2/4ees-6, Cold Room. R22, R404

Category: compressor
written by www.mbsm.pro | 31 January 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, 4ec-6.2-4os, 6HP, Bitzer Piston Compressor, 4ces-6, Refrigeration Compressor , 4ec-6.2/4ees-6, Cold Room. R22, R404

Mbsm.pro, Compressor, inverter, LG Refrigerator, BMG110NHMV, BMG/BMA LG, Lbp, 1/4 Hp , R600A

Category: compressor
written by www.mbsm.pro | 31 January 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, inverter, LG Refrigerator, BMG110NHMV, BMG/BMA LG, Lbp, 1/4 Hp , R600A

Mbsm.pro, Compressor, AJE4511YTZ , R134a, hbp, TAJ4511Y, R-12/R-409A, lbp, 1HP, 3hp, 400V U.H., CAJ4511A, 1ph, R-12, lbp, 220v

Category: compressor
written by www.mbsm.pro | 31 January 2022

Mbsm.pro, Compressor, AJE4511YTZ , R134a, TAJ4511Y, R-12/R-409A, 1HP, 3hp, 400V U.H., CAJ4511A, 1ph, R-12, 220v

---

Mbsm.pro, Compressor, R290, 0.110Kg,

SC15CNX.2, Secop, DANFOSS, SC15CNX, 15,28cm³, LBP, 230V, Hermetic piston compressors, 5/8 Hp, 104h 8568, 104h8568

Category: compressor
written by www.mbsm.pro | 31 January 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, R290, 0.110Kg, SC15CNX, 15,28cm³, LBP, 230V, Hermetic piston compressors, 5/8 Hp, 104h 8568, 104h8568

Mbsm.pro, Daikin, compressor , R22/R407C

Category: compressor
written by www.mbsm.pro | 31 January 2022

Private Picture Copyright : WWW.MBSM.PRO

High Performance Scroll

·D Model Standard Dimension (Refrigerant R22/R407C)

MODEL	A	B	C	D	E	F	G
JT212(236)D-YE(Y1L) JT212(236)DA-Y1	450	277	228	20	275	512	171.5
JT212(236)D-P1YE	450	277	228	20	275	554.2	171.5
JT265-335D-YE(Y1L) JT265-335DA-Y1L(Y1)	462	277	228	20	275	524	182.5
JT265-335D-P1YL	462	277	228	20	275	566.2	182.5

·D Model Compressor Range (Refrigerant R22)

OUTPUT (HP)	POWER SOURCE	MODEL	PERFORMANCE						CAPACITY cm^3/r	TUBE CONNECTIONS	
			TESTING POWER SOURCE	NOMINAL CAPACITY KW	NOMINAL CAPACITY BTU/H	TNPUT KW	CURRENT A	COP W/W		SUCTION TUBE mm	DISCHARGE TUBE mm
7	380V/50Hz 3 PHASE	JT212D-Y1L	380V/50Hz	21.3	73400	6.56	11.3	3.25	117.3	Φ25.4	Φ19.1
7.5		JT236D-Y1L	380V/50Hz	23.8	81900	7.27	12.4	3.27	131	Φ25.4	Φ19.1
8.5		JT265D-Y1L	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7	Φ31.8	Φ19.1
10		JT300D-Y1L	380V/50Hz	29.6	102000	8.94	15.2	3.31	163	Φ31.8	Φ19.1
11		JT315D-Y1L	380V/50Hz	30.8	106200	9.24	15.7	3.33	169.5	Φ31.8	Φ19.1
12		JT335D-Y1L	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2	Φ31.8	Φ19.1
7	380-415V/ 400-440V 3 PHASE 50/60Hz	JT212D-YE	380V/50Hz	21.3	73400	6.56	11.3	3.25	117.3	Φ25.4	Φ19.1
			400V/60Hz	24.9	85700	7.74	11.9	3.22			
7.5		JT236D-YE	380V/50Hz	23.8	81900	7.27	12.4	3.27	131	Φ25.4	Φ19.1
			400V/60Hz	28.1	96600	8.62	13.2	3.26			
8.5		JT265D-YE	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7	Φ31.8	Φ19.1
			400V/60Hz	31.5	108500	9.55	14.6	3.3			
10		JT300D-YE	380V/50Hz	29.6	102000	8.94	15.2	3.31	163	Φ31.8	Φ19.1
			400V/60Hz	34.9	120200	10.51	16.2	3.32			
12		JT335D-YE	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2	Φ31.8	Φ19.1
			400V/60Hz	39.4	136900	11.92	18.4	3.34			
7		JT212D-P1YE	380V/50Hz	21.3	73400	6.56	11.3	3.25	117.3	Φ25.4	Φ19.1
			400V/60Hz	24.9	85700	7.74	11.9	3.22			
7.5		JT236D-P1YE	380V/50Hz	23.8	81900	7.27	12.4	3.27	131	Φ25.4	Φ19.1
			400V/60Hz	28.1	96600	8.62	13.2	3.26			
8.5		JT265D-P1YE	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7	Φ31.8	Φ19.1
			400V/60Hz	31.5	108500	9.55	14.6	3.3			
10		JT300D-P1YE	380V/50Hz	29.6	102000	8.94	15.2	3.31	163	Φ31.8	Φ19.1
			400V/60Hz	34.9	120200	10.51	16.2	3.32			
12		JT335D-P1YE	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2	Φ31.8	Φ19.1
			400V/60Hz	39.4	136900	11.92	18.4	3.34			

TEST CONDITION OF COMPRESSOR

	EVAPORATING TEMPERATURE	CONDENSING TEMPERATURE	DEGREE OF UNDER COOLING	DEGREE OF SUPERHEAT	AMBIENT TEMPERATURE
COMPRESSOR	7.2℃	54.4℃	8.3℃	11.1℃	35℃

·D Model Compressor Range (Refrigerant R407C)

OUTPUT (HP)	POWER SOURCE	MODEL	PERFORMANCE						CAPACITY cm^3/r	TUBE CONNECTIONS	
			TESTING POWER SOURCE	NOMINAL CAPACITY KW	NOMINAL CAPACITY BTU/H	TNPUT KW	CURRENT A	COP W/W		SUCTION TUBE mm	DISCHARGE TUBE mm
7	380-415V 3 PHASE 50Hz	JT212DA-Y1	380V/50Hz	18.9	64500	6.87	11.7	2.75	117.3	Φ25.4	Φ19.1
8.5	380-415V 3 PHASE 50Hz	JT265DA-Y1	400V/50Hz	23.4	79800	8.36	14.1	2.8	144.7	Φ31.8	Φ19.1
10	380-415V 3 PHASE 50Hz	JT300DA-Y1	400V/50Hz	26.5	90400	9.44	16	2.81	163	Φ31.8	Φ19.1
12	380-415V 3 PHASE 50Hz	JT335DA-Y1	400V/50Hz	29.9	102000	10.7	17.9	2.79	184.2	Φ31.8	Φ19.1
10	380V 3 PHASE 50Hz	JT300DA-Y1L	380V/50Hz	29.6	101000	9.55	16.4	3.1	163	Φ31.8	Φ19.1
12	380V 3 PHASE 50Hz	JT335DA-Y1L	380V/50Hz	33.7	115000	10.81	18.3	3.12	184.2	Φ31.8	Φ19.1

TEST CONDITION OF COMPRESSOR

	EVAPORATING TEMPERATURE	CONDENSING TEMPERATURE	DEGREE OF UNDER COOLING	DEGREE OF SUPERHEAT	AMBIENT TEMPERATURE
COMPRESSOR	7.2℃	54.4℃	8.3℃	11.1℃	35℃
	5℃	55℃	8℃	5℃	35℃

·D Model Tandem Compressor Standard Dimension (Refrigerant R22)

- Capacity Range：7HP–12HPFree Connection
- Reliable and Simple Oil Blance Design
- Low Noice/Low Vibration

MODEL	A	B	C	D	E
JT212(236)D-TY1L(YE)	512	328	275	450	171.5
JT265(300,335)-TY1L(YE)	524	340	287	462	182.5

·D Model Tandem Compressor Range (Refrigerant R22)

OUTPUT (HP)	POWER SOURCE	MODEL	PERFORMANCE						CAPACITY cm^3/r	TUBE CONNECTIONS	
			TESTING POWER SOURCE	NOMINAL CAPACITY KW	NOMINAL CAPACITY BTU/H	TNPUT KW	CURRENT A	COP W/W		SUCTION TUBE mm	DISCHARGE TUBE mm
7	380V/50Hz 3 PHASE	JT212D-TY1L	380V/50Hz	21.3	73400	6.56	11.3	3.25	117.3	Φ25.4	Φ19.1
7.5		JT236D-TY1L	380V/50Hz	23.8	81900	7.27	12.4	3.27	131	Φ25.4	Φ19.1
8.5		JT265D-TY1L	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7	Φ31.8	Φ19.1
10		JT300D-TY1L	380V/50Hz	29.6	102000	8.94	15.2	3.31	163	Φ31.8	Φ19.1
11		JT315D-TY1L	380V/50Hz	30.8	106200	9.24	15.7	3.33	169.5	Φ31.8	Φ19.1
12		JT335D-TY1L	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2	Φ31.8	Φ19.1
7	380-415V/ 400-440V 3 PHASE 50/60Hz	JT212D-TYE	380V/50Hz	21.3	73400	6.56	11.3	3.25	117.3	Φ25.4	Φ19.1
			400V/60Hz	24.9	85700	7.74	11.9	3.22			
7.5		JT236D-TYE	380V/50Hz	23.8	81900	7.27	12.4	3.27	131	Φ25.4	Φ19.1
			400V/60Hz	28.1	96600	8.62	13.2	3.26			
8.5		JT265D-TYE	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7	Φ31.8	Φ19.1
			400V/60Hz	31.5	108500	9.55	14.6	3.3			
10		JT300D-TYE	380V/50Hz	29.6	102000	8.94	15.2	3.31	163	Φ31.8	Φ19.1
			400V/60Hz	34.9	120200	10.51	16.2	3.32			
12		JT335D-TYE	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2	Φ31.8	Φ19.1
			400V/60Hz	39.4	136900	11.92	18.4	3.34			

TEST CONDITION OF COMPRESSOR

	EVAPORATING TEMPERATURE	CONDENSING TEMPERATURE	DEGREE OF UNDER COOLING	DEGREE OF SUPERHEAT	AMBIENT TEMPERATURE
COMPRESSOR	7.2℃	54.4℃	8.3℃	27.8℃	35℃

TUBE CONNECTIONS

JT90GAJV1L JT95BHBYIL JT125GBBY1L JT125BCBY1L JT125G-YE @ K JT140G-P4Y1 @ K

JT150BCBY1L JT150BK-YE JT160BCBY1L JT170GABY1L JT170FDKYE JT300D-YE JT300D-P1YE JT300D-YE @ JT315D-Y1L JT335D-Y1L JT100BHVYE JT100BHV JT100BCBV1L JT100GABV1L 2YC45BXD 2YC45JXD 2YC45BXD 1GDY23AXD 2YC32VXD JT1FCVDKTYR JT1GCVDKYR 6T55TAC5YE 6T55WACSYE JT170G-K1YE JT170G-KYE@BA etc. Mainly used for refrigeration equipment such as air conditioners. Varieties ***, ***, ***, service is exhausted, welcome to call to discuss!

Daikin Compressor Features: JT170G-K1YE JT170G-KYE@BA
Daikin Compressor Features: Small and light. High reliability and easy to use.
?Due to the small diameter and slenderness of the compressor cylinder, it provides a good choice for the small and lightweight outdoor unit.
?In order to save the flexibility of space and location design, a new model with three-legged chassis is added on the basis of the original four-legged chassis. Give users more choices.
?The number of compressor parts is small and the reliability is high.
?Compressors can withstand the most brutal tests of heat pump systems.
?Only the protection device of the motor in the compressor is built-in, and other protections are matched by the system. This allows system designers to set protections in the system as needed, allowing product designers to better control the compressors used.
JT300DJT160B-NYE JT160B-NFYE New original Daikin marine air conditioner refrigeration equipment compressor A-Y1L JT335DA-Y1L New original Daikin compressor R407CJT100BDVTYE JT100FBVD JT100FAVD New original Daikin inverter air conditioner compressor JT170G-K1YE JT170FDKYE JT170FBKYE New original Daikin air conditioner compressor Machine JT160BCBY1L JT160GABY1L Original Daikin 5 HP Central Air Conditioning Compressor VRV3 generation RHXYQ14PY1 inverter compressor original new JT160GAJY1L Daikin 5 hp central air conditioning compressor three feet return air pipe upward R22 original 12 hp JT335D-P1YE JT300D-P1YE Daikin central air conditioning compressor 10 hp JT315D Original 5 HP JT160GABY1L JT170GABY1L Daikin Air Conditioning Compressor Heat Pump Straight Tube Daikin Parallel Compressor JT300DA-YE Daikin 10P12 HP Air Conditioning Compressor R40JT100FBVD JT100BHV JT100G-VDL@S Original Daikin Inverter Air Conditioning Refrigeration Compressor JT140G-P4Y1@K Brand New Original 5 Daikin Fixed Frequency Air Conditioning Compressor R410A 3 Foot Daikin 5P JT160BCBY1L Panasonic C-SB373H8A Air Conditioning Air Energy Heat Pump Compressor C-SB453

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Tecumseh, SE307-12, 220V, Fla 1.22 A, Lra 7.0 A, R12, 1/5 hp, 687 btu

Category: compressor
written by www.mbsm.pro | 31 January 2022

L209	LT-R12	208-230/60/1	1121	N/A
L25	LT-R12	115/60/1	1250	AEA1413AXA
L33	LT-R12	115/60/1	1570	AEA2415AAB
ML064	LT-R12	115/60/1	640	AEA1360AXA
ML080	LT-R12	115/60/1	800	AEA1380AXA
ML090	LT-R12	115/60/1	900	AEA1410AXA
ML38	LT-R12	115/60/1	380	AEA1336AXA
ML52	LT-R12	115/60/1	520	AEA1360AXA
SE305-1	LT-R12	115/60/1	592	AEA1360AXA
SE306-1	LT-R12	115/60/1	656	AEA1360AXA
SE306-12	LT-R12	208-230/60/1	638	N/A
SE307-1	LT-R12	115/60/1	790	AEA1380AXA
SE307-12	LT-R12	208-230/60/1	687	N/A
SE308-1	LT-R12	115/60/1	899	AEA1410AXA
SE309-1	LT-R12	115/60/1	950	AEA1410AXA
SE312-1	LT-R12	115/60/1	1210	AEA2413AXA
SE407-1	LT-R12	115/60/1	790	AEA1380AXA
SE407-12	LT-R12	208-230/60/1	687	N/A
SE408-1	LT-R12	115/60/1	899	AEA1410AXA
SE409-1	LT-R12	115/60/1	950	AEA1410AXA
SE409-12	LT-R12	208-230/60/1	896	N/A

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Tecumseh, SE307-12, 220V, Fla 1.22 A, Lra 7.0 A, R12, 1/5 hp, 687 btu