

# Compressor, FLB075LBNA, LG-Original New Linear Refrigerator Compressor, LG-compressor, Inverter 0~220V 53Hz, R134a(165g), LSXC22386, LSXC22326, LSXC22336, 1/4HP

written by Lilianne | 17 October 2021

FLS075LANA is the new **compressor** model number It replaces these older **LG/Kenmore Elite compressor** versions: FC75LBNA FLA075LANA FLB075LANA **FLB075LBNA**

Compressor Fls075lana\_replacement A: Fla075lana, Flb075lana

Compressor, FLB075LBNA, LG-Original New Linear Refrigerator Compressor, LG-compressor, Inverter 0~220V 53Hz, R134a(165g), LSXC22386, LSXC22326, LSXC22336, 1/4HP

New version LG Compressor part # TCA38091801 & Software Jig TCA35911910

Compressor has a purple decal and red decal on top warning about the software update.

FLS075LANA is the new compressor model number

It replaces these older LG/Kenmore Elite compressor versions:  
FC75LBNA

FLA075LANA

FLB075LANA

FLB075LBNA



OPERATED BY DESIGNATED CONTROLLER. THERMAL PROTECT  
UTILISATION RÉSERVÉE AU CONTRÔLEUR DÉDIÉ. PROTECTION THERMIQUE  
LG Electronics Inc. MADE IN KOREA. (SEE INVERSE FOR MORE)

**LG FLB075LBNA**

INVERTER 0-220V, 50Hz

Linear Compressor R134a

01W02000170170000





SEARS BRANDS  
MANAGEMENT CORPORATION  
HOFFMAN ESTATES, IL 60179

HOUSEHOLD REFRIGERATOR/  
REFRIGÉRATEUR MENAGERE

**MODEL/MODÈLE :** 795.73153.610



RATING/CAPACITÉ NOMINALE 115V ~ 60Hz 2.9A  
REFRIGERANT/RÉFRIGÉRANT R134a 5.11oz  
DEFROSTING INPUT / PUISSANCE ABSORBÉE EN DÉGIVRAGE 360W  
POWER INPUT OF DEFROST HEATER /  
PUISSANCE ABSORBÉE DE LA RÉSISTANCE DE DÉGIVRAGE

FREEZER/CONGÉLATEUR 350W  
PRODUCTION DATE / DATE DE PRODUCTION 2016.04

DIMENSIONS 35 3/4(W) x 36 1/4(D) x 70 1/4(H) inch  
DESIGN PRESSURES/ HIGH SIDE/ CÔTÉ SUPÉRIEUR 400PSI Ga  
PRESSION DE DESSIN LOW SIDE/ CÔTÉ INFÉRIEUR 140PSI Ga

SER.No./NO.DE SÉRIE:

MADE IN KOREA  
FABRIQUÉ EN CORÉE



604KR00971



For SEARS REPAIR SERVICE  
CALL 1-844-553-6667  
AU CANADA POUR SERVICE EN  
FRANÇAIS 1-800-LE-FOYER<sup>MC</sup>  
24HOURS A DAY,  
7 DAYS A WEEK FOR SEARS  
REPAIR SERVICE  
LE SERVICE DE REPARATION  
SEARS CANADA  
VINGT-QUATRE HEURES PAR JOUR,  
SEPT JOURS PAR SEMAINE.


TAB37097603








### Name Plate

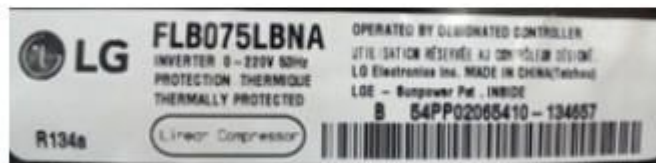

Size : 90mm X 20mm

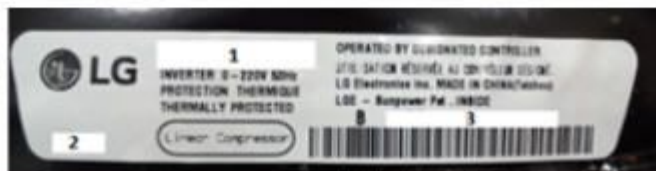

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Compressor Label

### 1. Compressor Model

**FLB075LBNA**

- Series name -----  
DLF/FA/FB
- Displacement -----  
ex)90=9.0 /stroke
- Application Category -----  
- L : LBP with R134a  
- H : HBP with R134a  
- N : LBP with R600a
- Operating Type  
A : A-Inverter  
E : E-Inverter
- Rated Voltage & Frequency  
- M : 220V 50/60Hz  
- N : 115V 50/60Hz
- Efficiency version  
A : 1<sup>st</sup> generation  
B : 2<sup>nd</sup> generation

### 2. Refrigerant

### 3. Serial Number

**00 00 9 2003 5 13 0012**

Buyer Code --  
Model Code -----  
Line -----

Serial No.  
Month ----- Date  
1 : January O : October  
~ N : November  
9 : September D : December

Year

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Defrost	End		Auto
	Evaporation		Forced method
	Type of heat shield		Cyclo-Pentane
F-Room	Fixed Shelf		3
	Drawer		2
R-Room	Fixed Shelf		4
	Shelf(Movable, Folding)		-
	Egg container		-
	Vegetable room		2
Freezing cycle	Compressor driving method		A Logic Inverter operation
	Evaporation		Pin tube type
	Condenser		Forced convection method
	F-Room oil		Freol Alpha5 oil(175cc)
	Type of refrigerant		R134a(165g)
	Capillary tube		Φ 0.7/0.9
	Dryer (drying tube)		MOLECULAR SIEVE XH-9
Electrical parts		Initial defrost	4~5 hours (vary depending on condition)
		Defrost cycle	9~11 hours (vary depending on condition)
		Rest time	3 Min
		Defrost sensor	Returend to defrost function when reaching to 5°C
		Temp.fuse (rated/ operation temperature)	250V / 72°C
		Heater Sheath	AC 115V / 260W
		Dispenser duct door heater	-
	Parts related with dewing prevention	R-Room home bar heater	120V / 6.5W
		F-Room home bar heater	-
		Dispenser heater	DC 12V / 2.5W
	Capacitor	Comp' Running	AC 450V / 20 μF
		l/maker geared motor Running	AC 250V / 14 μF

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)