

Compressor, FLB075LBNA, LG-Original
New Linear Refrigerator Compressor,
LG-compressor, Inverter 0~220V 53Hz,
R134a(165g), LSXC22386, LSXC22326,
LSXC22336, 1/4HP

Category: compressor

written by www.mbsm.pro | 17 October 2021



FLS075LANA is the new **compressor** model number It replaces these older **LG/Kenmore Elite compressor** versions: FC75LBNA FLA075LANA FLB075LANA **FLB075LBNA**

Compressor Fls075lana_replacement A: Fla075lana, Flb075lana

Compressor, FLB075LBNA, LG-Original New Linear Refrigerator Compressor, LG-compressor, Inverter 0~220V 53Hz, R134a(165g), LSXC22386, LSXC22326, LSXC22336, 1/4HP

New version LG Compressor part # TCA38091801 & Software Jig TCA35911910

Compressor has a purple decal and red decal on top warning about the software update.

FLS075LANA is the new compressor model number

It replaces these older LG/Kenmore Elite compressor versions:

FC75LBNA

FLA075LANA

FLB075LANA

FLB075LBNA







SEARS BRANDS
MANAGEMENT CORPORATION
HOFFMAN ESTATES, IL 60179

HOUSEHOLD REFRIGERATOR/
REFRIGÉRATEUR MENAGERE

MODEL/MODÈLE :  **795.73153.610**

RATING/CAPACITÉ NOMINALE **115V ~ 60Hz 2.9A**

REFRIGERANT/RÉFRIGÉRANT **R134a 5.11oz**

DEFROSTING INPUT / PUISSANCE ABSORBÉE EN DÉGIVRAGE **360W**

POWER INPUT OF DEFROST HEATER /
PUISSANCE ABSORBÉE DE LA RÉSISTANCE DE DÉGIVRAGE

FREEZER/CONGÉLATEUR **350W**

PRODUCTION DATE / DATE DE PRODUCTION **2016.04**

DIMENSIONS **35 3/4(W) x 36 1/4(D) x 70 1/4(H) inch**

DESIGN PRESSURES/ HIGH SIDE/ CÔTÉ SUPÉRIEUR **400PSI Ga**

PRESSION DE DESSIN LOW SIDE/ CÔTÉ INFÉRIEUR **140PSI Ga**

SER.No./NO. DE SÉRIE:

MADE IN KOREA
FABRIQUÉ EN CORÉE




604KR00971



For SEARS REPAIR SERVICE
CALL 1-844-553-6667

AU CANADA POUR SERVICE EN
FRANÇAIS 1-800-LE-FOYER^{MC}


24HOURS A DAY,
7 DAYS A WEEK FOR SEARS
REPAIR SERVICE
LE SERVICE DE REPARATION
SEARS CANADA
VINGT-QUATRE HEURES PAR JOUR,
SEPT JOURS PAR SEMAINE.

TAB37097603 






Name Plate

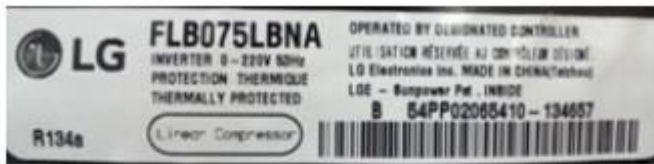

Size : 90mm X 20mm

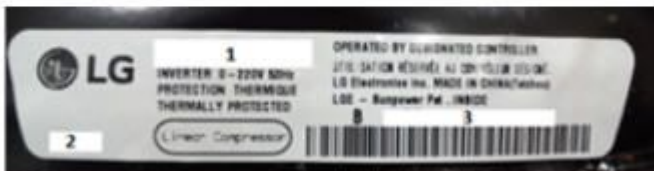

Compressor Label

1. Compressor Model

FLB075LBNA

- **Series name** -----
DLF/FA/FB
- **Displacement** -----
ex)90=9.0 /stroke
- **Application Category** -----
- L : LBP with R134a
- H : HBP with R134a
- N : LBP with R600a
- **Operating Type** -----
A : A-Inverter
E : E-Inverter
- **Rated Voltage & Frequency** -----
- M : 220V 50/60Hz
- N : 115V 50/60Hz
- **Efficiency version** -----
A : 1st generation
B : 2nd generation

2. Refrigerant

3. Serial Number

00 00 9 2003 5 13 0012

Buyer Code ---
Model Code ---
Line -----

Year ---
Month ---
Date ---

Serial No. ---

1: January	O: October
~	N: November
9: September	D: December

Private Picture Copyright : WWW.MBSM.PRO

Defrost	End	Auto	
	Evaporation	Forced method	
	Type of heat shield	Cyclo-Pentane	
F-Room	Fixed Shelf	3	
	Drawer	2	
R-Room	Fixed Shelf	4	
	Shelf(Movable, Folding)	-	
	Egg container	-	
Vegetable room		2	
Freezing cycle	Compressor driving method	A Logic Inverter operation	
	Evaporation	Pin tube type	
	Condenser	Forced convection method	
	F-Room oil	Freol Alpha5 oil(175cc)	
	Type of refrigerant	R134a(165g)	
	Capillary tube	Φ 0.7/0.9	
Dryer (drying tube)	MOLECULAR SIEVE XH-9		
Electrical parts	Initial defrost	4~5 hours (vary depending on condition)	
		Defrost cycle	9~11 hours (vary depending on condition)
		Rest time	3 Min
		Defrost sensor	Returend to defrost function when reaching to 5°C.
		Temp.fuse (rated/ operation temperature)	250V / 72°C
		Heater Sheath	AC 115V / 260W
	Parts related with dewing prevention	Dispenser duct door heater	-
		R-Room home bar heater	120V / 6.5W
		F-Room home bar heater	-
	Dispenser heater	DC 12V / 2.5W	
Capacitor	Comp' Running	AC 450V / 20 μF	
	l/maker geared motor Running	AC 250V / 14 μF	

Private Picture Copyright : WWW.MBSM.PRO