Mbsm.pro, Compressor, D110C21RAZ5, 1/3 hp, 298 w, 11 cc, 256 kcal, 1017 btu, lbp, r134a, 1ph/220/50hz

Category: compressor
written by www.mbsm.pro | 4 December 2024

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, D110C21RAZ5, 1/3 hp, 298 w, 11 cc, 256 kcal, 1017 btu, lbp, r134a, 1ph/220/50hz

---

Mbsm.pro, SECOP, DLE4CNT,compressor, 102H4460, 4cm3, r290, 1hp/220v, Lbp freezing (1/4 hp 193w -23.3°C /

54.4°C), mhbp semi-freezing (3/8 hp 341w -6.7°C / 54.4°C), HBp Cooling (5/8 hp 516w 7.2°C/54.4°C)

Category: compressor
written by www.mbsm.pro | 4 December 2024

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, SECOP, DLE4CNT,compressor, 102H4460, 4cm3, r290, 1hp/220v, Lbp freezing (1/4 hp 193w -23.3°C / 54.4°C), mhbp semi-freezing (3/8 hp 341w -6.7°C / 54.4°C), HBp Cooling (5/8 516w 7.2°C/54.4°C)

Mbsm.pro, Compressor, Embraco, EGYS110CLC, 1/3 hp, lbp, r600a, 263

w, 1.1a

Category: compressor
written by www.mbsm.pro | 4 December 2024

Mbsm.pro, Compressor, Embraco, EGYS110CLC, 1/3 hp, lbp, r600a, 263 w, 1.1a

---

Mbsm.pro, Lg, compressor, LQ119NAEM, 1/3 hp, 227 w, lbp, 774 btu, r600a

Category: compressor
written by www.mbsm.pro | 4 December 2024

Mbsm.pro, Lg, compressor, LQ119NAEM, 1/3 hp, 227 w, lbp, 774 btu, r600a

---

Mbsm.pro, 1/2HP, LG, Commercial, Freezer, Compressor ,Lx110lajm, SC21G, r134a

Category: compressor
written by www.mbsm.pro | 4 December 2024

1/2HP, LG, Commercial, Freezer, Compressor ,Lx110lajm, SC21G, r134a

---

Mbsm.pro, testing, Compressor, With Seria Lampe , Test to Change

Category: certificate
written by www.mbsm.pro | 4 December 2024

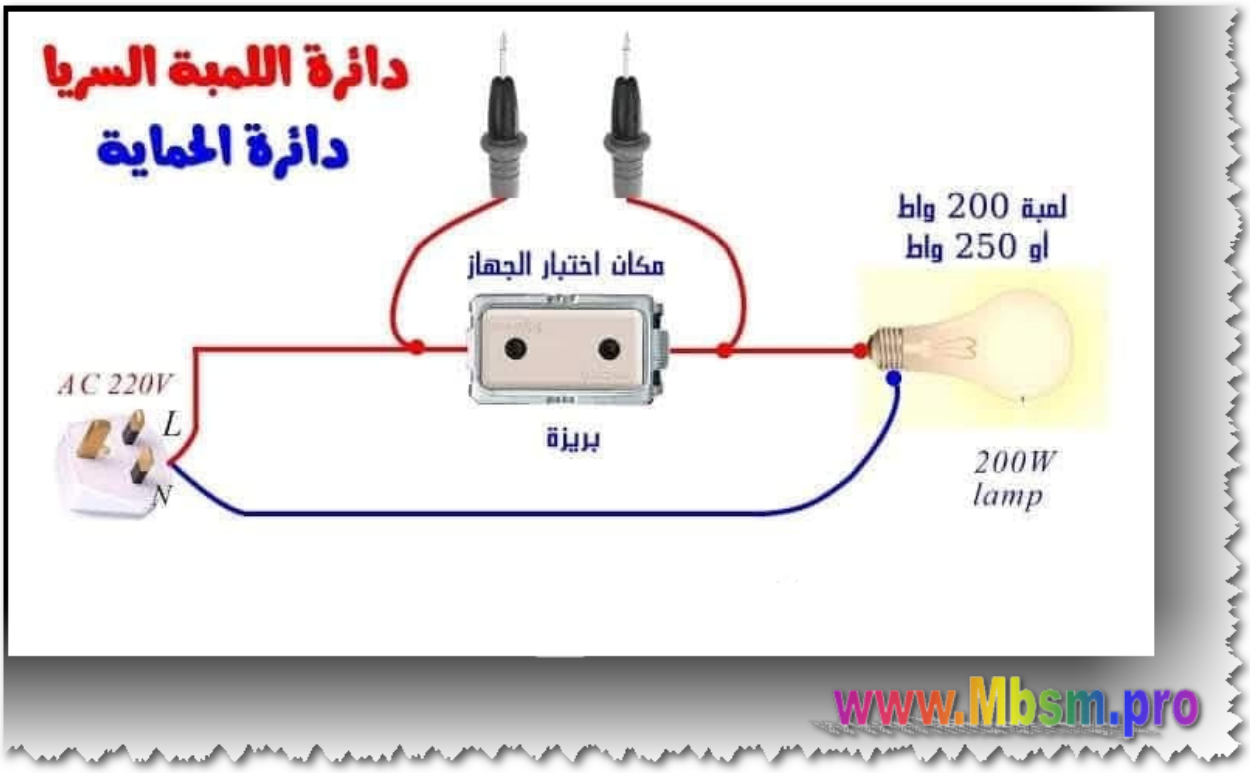

Mbsm.pro, testing, Compressor, With Seria Lampe , Test to Change

---

Mbsm.pro, Embraco,Start Capacitor

Category: expertise
written by www.mbsm.pro | 4 December 2024

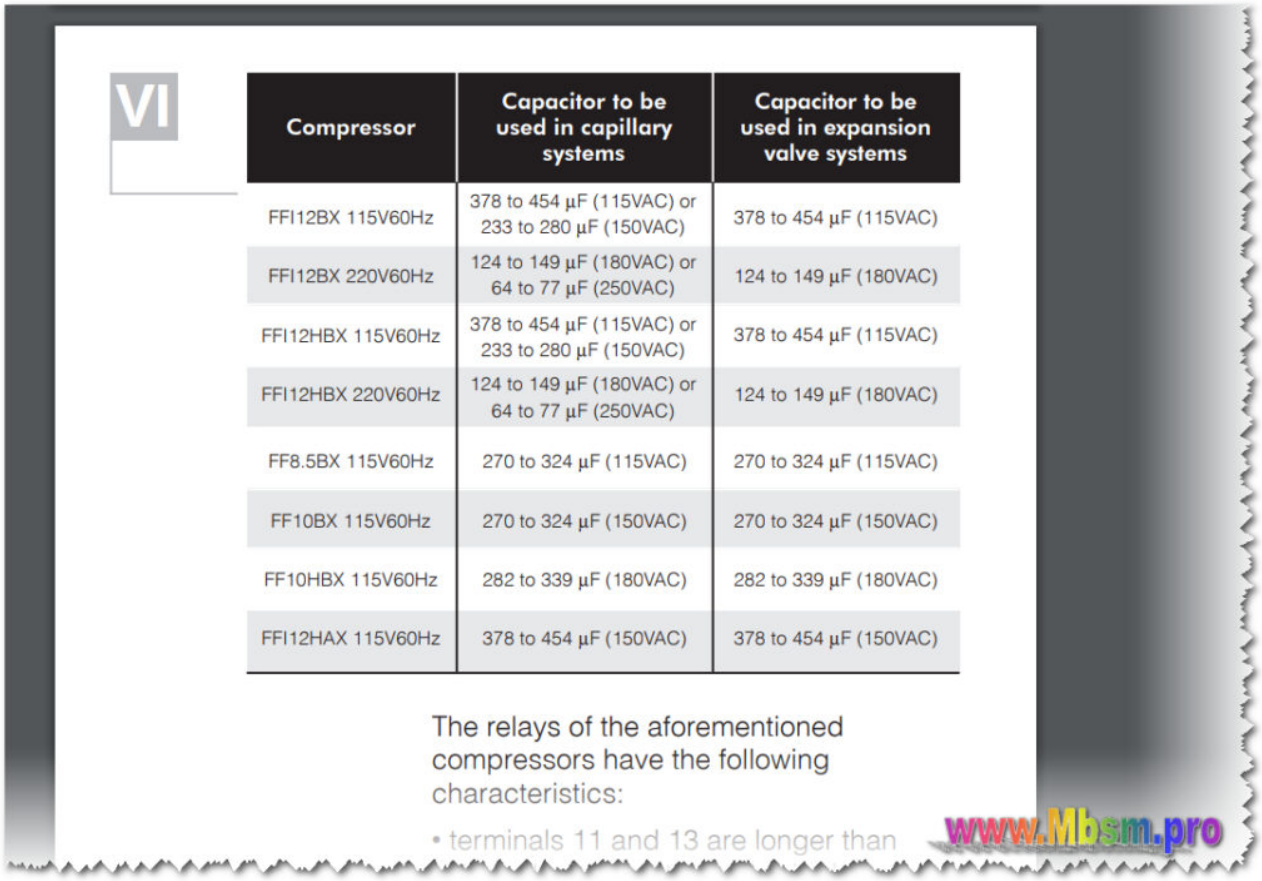

VI

Compressor	Capacitor to be used in capillary systems	Capacitor to be used in expansion valve systems
FFI12BX 115V60Hz	378 to 454 µF (115VAC) or 233 to 280 µF (150VAC)	378 to 454 µF (115VAC)
FFI12BX 220V60Hz	124 to 149 µF (180VAC) or 64 to 77 µF (250VAC)	124 to 149 µF (180VAC)
FFI12HBX 115V60Hz	378 to 454 µF (115VAC) or 233 to 280 µF (150VAC)	378 to 454 µF (115VAC)
FFI12HBX 220V60Hz	124 to 149 µF (180VAC) or 64 to 77 µF (250VAC)	124 to 149 µF (180VAC)
FF8.5BX 115V60Hz	270 to 324 µF (115VAC)	270 to 324 µF (115VAC)
FF10BX 115V60Hz	270 to 324 µF (150VAC)	270 to 324 µF (150VAC)
FF10HBX 115V60Hz	282 to 339 µF (180VAC)	282 to 339 µF (180VAC)
FFI12HAX 115V60Hz	378 to 454 µF (150VAC)	378 to 454 µF (150VAC)

The relays of the aforementioned compressors have the following characteristics:

• terminals 11 and 13 are longer than

Mbsm.pro, Embraco,Start Capacitor

Mbsm.pro, Compressor, PH31VNET, r22, 1-1/2 hp, 1-1/2 Ton, 18000 btu/h, Capacitor 45uf, 1 ph/220v

Category: compressor
written by www.mbsm.pro | 4 December 2024

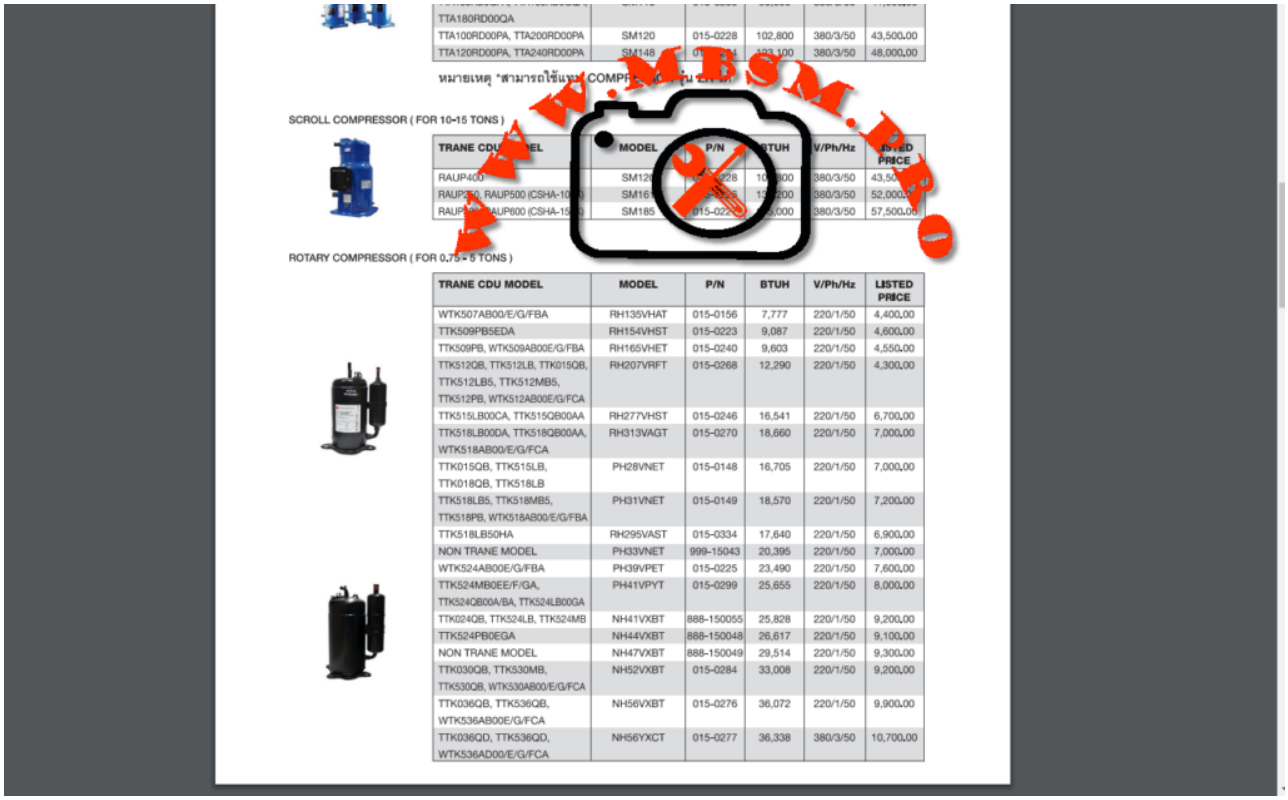

Mbsm.pro, Compressor, PH31VNET, r22, 1-1/2 hp, 1-1/2 Ton, 18000 btu/h, Capacitor 45uf, 1 ph/220v

TRANE CDU MODEL	MODEL	P/N	BTUH	V/Ph/Hz	LISTED PRICE
WTK507AB00/E/G/FBA	RH135VHAT	015-0156	7,777	220/1/50	4,400.00
TTK509PB5EDA	RH154VHST	015-0223	9,087	220/1/50	4,600.00
TTK509PB, WTK509AB00E/G/FBA	RH165VHET	015-0240	9,603	220/1/50	4,550.00
TTK512QB, TTK512LB, TTK015QB, TTK512LB5, TTK512MB5, TTK512PB, WTK512AB00E/G/FCA	RH207VRFT	015-0268	12,290	220/1/50	4,300.00
TTK515LB00CA, TTK515QB00AA	RH277VHST	015-0246	16,541	220/1/50	6,700.00
TTK518LB00DA, TTK518QB00AA, WTK518AB00/E/G/FCA	RH313VAGT	015-0270	18,660	220/1/50	7,000.00
TTK015QB, TTK515LB, TTK018QB, TTK518LB	PH28VNET	015-0148	16,705	220/1/50	7,000.00
TTK518LB5, TTK518MB5, TTK518PB, WTK518AB00/E/G/FBA	PH31VNET	015-0149	18,570	220/1/50	7,200.00
TTK518LB50HA	RH295VAST	015-0334	17,640	220/1/50	6,900.00
NON TRANE MODEL	PH33VNET	999-15043	20,395	220/1/50	7,000.00
WTK524AB00E/G/FBA	PH39VPET	015-0225	23,490	220/1/50	7,600.00
TTK524MB0EE/F/GA, TTK524QB00A/BA, TTK524LB00GA	PH41VPYT	015-0299	25,655	220/1/50	8,000.00
TTK024QB, TTK524LB, TTK524MB	NH41VXBT	888-150055	25,828	220/1/50	9,200.00
TTK524PB0EGA	NH44VXBT	888-150048	26,617	220/1/50	9,100.00
NON TRANE MODEL	NH47VXBT	888-150049	29,514	220/1/50	9,300.00
TTK030QB, TTK530MB, TTK530QB, WTK530AB00/E/G/FCA	NH52VXBT	015-0284	33,008	220/1/50	9,200.00
TTK036QB, TTK536QB, WTK536AB00E/G/FCA	NH56VXBT	015-0276	36,072	220/1/50	9,900.00
TTK036QD, TTK536QD, WTK536AD00/E/G/FCA	NH56YXCT	015-0277	36,338	380/3/50	10,700.00

Mbsm.pro , Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph

Category: compressor
written by www.mbsm.pro | 4 December 2024

Mbsm.pro , Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph

---

Mbsm.pro, Compressor, hkk95aa, 220-240/50 1/5hp, 167w, R600a, lbp

Category: compressor
written by www.mbsm.pro | 4 December 2024

The **Comp HKK95AA** is a compressor designed for refrigeration applications, specifically operating at **220-240V** and **50Hz**, with a capacity of **1/5 HP (167W)** and using **R600a refrigerant**. Here are some key details:

- **Model**: Comp HKK95AA
- **Voltage**: 220-240V
- **Frequency**: 50Hz
- **Power**: 1/5 HP (approximately 167W)
- **Refrigerant Type**: R600a (Isobutane)
- The **Comp HKK95AA** compressor is classified as a **Low Back Pressure (LBP)** compressor. This classification means it is designed for applications that operate at lower pressure differentials, making it suitable for domestic refrigeration systems, such as:
- **Household Refrigerators**: These typically maintain temperatures between 0°C to 5°C (32°F to 41°F).
- **Domestic Freezers**: Operating around -18°C (0°F) for effective food preservation.
- LBP compressors are ideal for environments where the cooling load is moderate and consistent, which aligns with the typical usage scenarios for the HKK95AA

hkk95aaDownload