

Kulthorn, compressor, Kulthorn compressor, c-qn76l6f, c-qn76l6f-1, 1/10 Hp, 1Ph, Serie C-q, R134a, 76 watt, Low back pressure, 200-220V/50hz, 220v/60hz, Compressor modéfier

Category: compressor

written by www.mbsm.pro | 7 January 2021

Kulthorn, compressor, Kulthorn compressor, c-qn76l6f, 1/10 Hp, 1Ph, Serie C-q, R134a, 76 watt, Low back pressure, 200-220V/50hz, 220v/60hz, Compressor modéfier
Compressor Motor Protectors

Each compressor incorporates a motor protection device or system. Generally, the larger the compressor, the more sophisticated the motor protector.

It is essential that an electric motor is protected against conditions that could

otherwise result in damage to the motor or to the electrical supply system. For this

reason, every Kulthorn compressor is supplied with a motor protector, sometimes referred

to as an overload. The more expensive the compressor, the greater is the economic

justification for specifying a motor protector that has the ability to protect over a wider

range of conditions.

1. External Motor Protectors

A smaller compressor (such as an AZ, AE or WJ) is fitted with an external motor

protector. Most commonly, this is a compact, cylindrical device that contains a snapaction bimetallic disc. The protector is mounted in contact with the surface of the

compressor housing, inside the terminal guard.

The compressor current passes through the bimetallic disc. The resistance of this disc

causes the disc temperature to increase as the motor current increases. There is usually

a small heater, located under the disc and connected in series with the disc itself. This

heater further raises the temperature of the disc. There is also the impact of the

compressor shell temperature, and a hot compressor will further increase the disc

temperature. The temperature of the disc is thus influenced by the combined effects of –

- the compressor motor current
- the compressor shell temperature

When the bimetallic disc reaches a predetermined temperature (often either 105°C or 120°C) the disc will snap open, and power supply to the compressor will be interrupted.

The compressor will cool, and at a reduced disc temperature the protector will reset

and the compressor will restart, or attempt to restart. If the abnormal condition that

caused the protector to trip in the first place still exists, the compressor is likely to continue

to cycle on the overload until that condition is corrected.

There are two situations where a motor protector is expected to operate.

2. When the compressor is running under extreme conditions.

3. When the compressor is in a locked rotor condition. This is a situation where the

compressor cannot start because the voltage is too low, the system pressures are


outside the range for which the compressor is approved, there is internal damage to

the compressor, or there is some other reason why the compressor is incapable of

starting



Model Number System

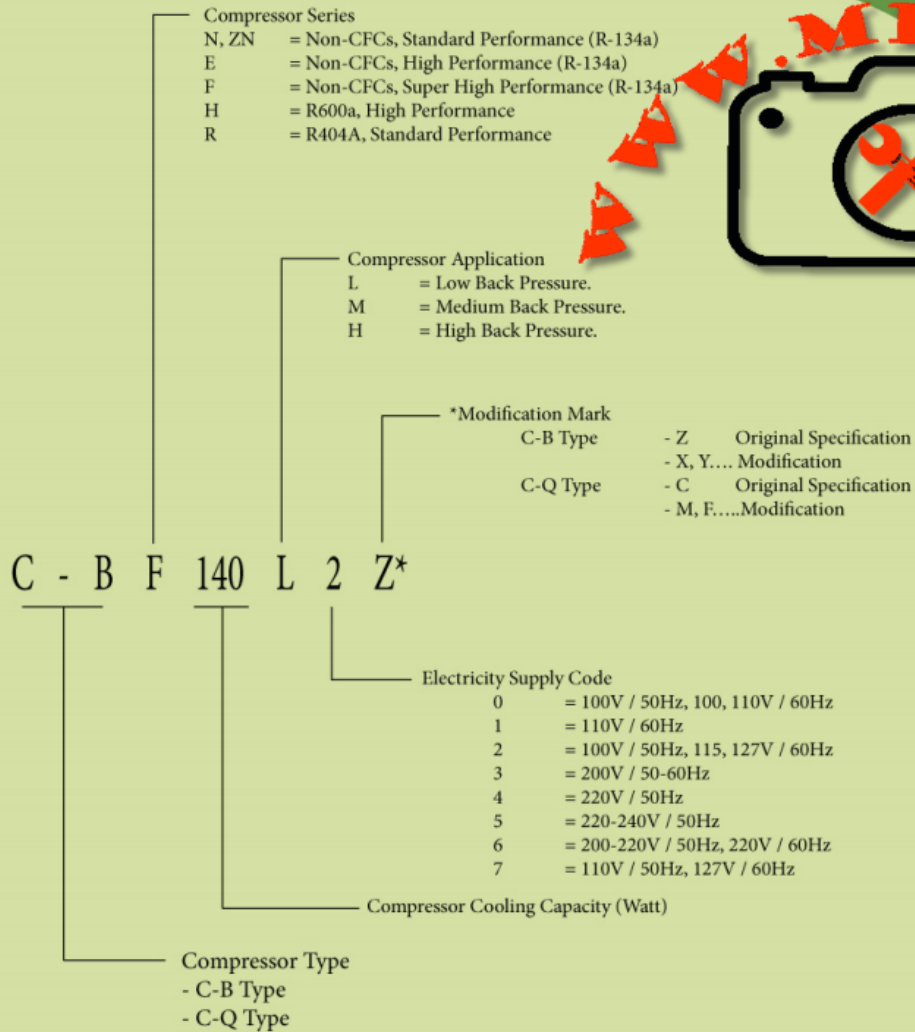

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_2019-06-13_110312_technical_bulletinTélécharger

Mbsm_dot_pro_private_PDF_kpccatalogTélécharger

Mbsm_dot_pro_private_PDF_KULTHORN-CATALOGUE_webTélécharger

Mbsm_dot_pro_private_PDF_Kulthorn-CatalogTélécharger

Mbsm_dot_pro_private_PDF_Model-Number-SystemTélécharger



KULTHORN

COMPRESSOR

Private Picture Copyright : WWW.MBSM.PRO

Name: Kulthorn Premier Company Limited (KPC)
 Established: December 1982
 Registered Capital: Baht 1,125 Million
 Address: 446/3 Moo 9 Chachoengsao – Nakornratchasima Road,
 Kabinburi Industrial Estate, Nongki, Kabinburi, Prachinburi 25160, Thailand
 Telephone: (037) 204835, 455516
 Fax: (037) 455525, 204844
 E-mail: sales_kpc@kulthorn.com
 kamjorn@kulthorn.com
 Employees: 900 persons
 Land area: 91 rai (145,600 m²)
 Building of area: 41,500 m²
 Business Products: Hermetic Reciprocating Compressor (Scotch Yoke Mechanism)
 (Product under license SANYO Japan) Size 30-250 Watt.
Compressor series / Refrigerant
 C-BN, C-BZN, C-BE, C-BF / R-134a
 C-QN / R-134a
 C-BH / R-600a
 C-BR / R-404A
 Shareholder: Kulthorn Kirby Public Company Limited 100%
 Customers: **Domestic** – Haier, Sanyo, Toshiba, Hitachi, Daewoo, Samsung, Sanden, etc.
Total = 35%
Export – Daewoo, Sanyo Group, GE, Sanden, Haier, Singer, Videocon,
 Toshiba, etc.
Total = 65%
 Quality System: ISO 9001:2000 Certified by TUV Nord Year 2003
 Q-Mark Certified by F.T.I. Year 2007



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Lg, compressor, CMA110NJJM, rcsb, 1ph/220v/50hz, 170 kcal, 676 bth/, 198 w, 1/4 hp, fixed speed , classique compressor, r600a, lbp

Category: compressor

written by www.mbsm.pro | 7 January 2021



Private Picture Copyright : WWW.MBSM.PRO

The LG CMA110NJJM compressor is a classic model that operates on a single phase

with a voltage of 220V and a frequency of 50Hz. It boasts a fixed speed and is powered by a 1/4 HP motor. This compressor is perfect for applications requiring a steady and reliable performance.

Mbsm.pro, Compressor, hpl26yh-5, Serie YH, 1/4hp, 762 Btu/h, 192 kcal/c, R134A, LBP, 220-240 v 50HZ

Category: Archivation,compressor

written by www.mbsm.pro | 7 January 2021



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, hpl26yh-5, Serie YH, 223 W, 762 Btu/h, 192 kcal/c, R134A, LBP, 220-240 v 50HZ

NSA43LAEG ,P220MC ,4TM166RFB ,102
Watts ,1/8HP , R12 , 1 Phase

Category: Technologie,Tester ok

written by www.mbsm.pro | 7 January 2021

NSA43LAEG ,P220MC ,4TM166RFB ,102 Watts ,1/8HP , R12 , 1 Phase

Compresseurs Embraco, ,EMU70HLC ,
R134a, 220 V, 50Hz, 1/5 HP, 149 watts
, 180 mL

Category: Technologie,Tester ok

written by www.mbsm.pro | 7 January 2021

Compresseurs Embraco, ,EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 0.17
kW (0.2214 BHP) ,180 mL

Mbsm.pro, Compressor, SR075Z, 1/5
hp++, lbp, r134a, refrigerator
COLDEX , Equivalent, Cubigel GL75AA,
ACC , GVM66AA, AS80, Embraco
FFI7.5HAK, EMT60HLP, NBT1116Z, Secop,
TLES6.5FT.3

Category: compressor

written by www.mbsm.pro | 7 January 2021



Mbsm.pro, Compressor, SR075Z, 1/5 hp++, lbp, r134a, refrigerator COLDEX , Equivalent, Cubigel GL75AA, ACC , GVM66AA, AS80, Embraco FFI7.5HAK, EMT60HLP, NBT1116Z, Secop, TLES6.5FT.3

Mbsm.pro, HERMETIC, Kulthorn,
COMPRESSOR, CA 2435Z-2, 917 w, 28A,
3/4 hp++, 1 hp–, 1ph

Category: compressor,expertise

written by www.mbsm.pro | 7 January 2021



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, HERMETIC, Kulthorn, COMPRESSOR, CA 2435Z-2, 917 w, 28A, 3/4 hp++, 1 hp–, 1ph

Mbsm.pro, Bristol, Compressor, H24B17QABJA, 17000 btu, 1.5 hp, r22, Capillary Size (0.060), Capillary Length 33"

Category: air conditioner,compressor

written by www.mbsm.pro | 7 January 2021



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Bristol, Compressor, H24B17QABJA, 17000 btu, 1.5 hp, r22, Capillary Size (0.060), Capillary Length 33"

Mbsm.pro, Tecumseh, Compressor, 1HP, R404 ,MHBP, CAJ9510Z, r22

Category: compressor

written by www.mbsm.pro | 7 January 2021



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Tecumseh, Compressor, 1HP, R404 ,MHBP, CAJ9510Z, r22

Tecumseh, AEZ1410D, compressor, 1/3 HP, r12

Category: compressor

written by Amina | 7 January 2021



Private Picture Copyright : WWW.MBSM.PRO

Tecumseh, AEZ1410D, compressor, 1/3 HP, r12