

Mbsm.pro, compressor, refrigerator,  
NTH115MT, Turk Elektrik, 115 Kcal/h,  
1/5 hp, TEE compressor, r600a, lbp,  
BEK0 Fridge Freezer Compressor, 220 v

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022



**TEE** HERMETIC COMPRESSOR  
**NTH 115 MT H309-05**



**SUCTION** 230VAC 50Hz

LPA:8.1 LBP R-600a S

11190081 ZV19 12:04



CE ✓RoHS



H309-05

11192V19  
12:04

Mbsm.pro, compressor, refrigerator, NTH115MT, Turk Elektrik, 115 Kcal/h, 1/5 hp, TEE compressor, r600a, lbp, BEKO Fridge Freezer Compressor, 220 v

---

## Mbsm.pro, Compressor, Huaguang , EKA95, LBP, R-600, 165 W, CHINA, 1/5 Hp

Category: compressor

written by www.mbsm.pro | 16 February 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Huaguang , LBP, R-600, 165 W, CHINA, 1/5 Hp,

---

## Mbsm.pro, Compressor, Cubigel, Huayi, Electrolux, ZEM, Freezer, ML45TB, HMBP, R404A, R507, 220 – 240V/1/50Hz, 1/5 HP, ++ Big, 1/4 Hp –, CSIR

Category: compressor



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor ACC Cubigel Huayi Electrolux ZEM ML45TB, HMBP – R404A, R507, 220 – 240V/1/50Hz, 1/5 HP, discharge 4.5 cm<sup>3</sup>, motor type CSIR, oil type ISO VG46 ester, oil charge 300 cm<sup>3</sup>, 528 W at +5 / +55 °, input power, current 352 W, 2.04A, expansion device: capillar or valve, cooling: fan, weight 10.1 kg

---

**Mbsm.pro, Compressor, GMCC, PZ80E1F, cooling, capacity, 147W, 1/5 Hp, R600A, lbp**

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, GMCC, PZ80E1F, cooling, capacity, 147W, 160W, 1/5 Hp, R600 A, lbp

---

Mbsm.pro, Compressor, MGA51C84rLX, MGA51C68RPU, Panasonic compressor, M Series, Reciprocating Fixed Speed, 180 W, 1/5 Hp, RSCR, 220 V , r134a

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, MGA51C84rLX, MGA51C68RPU, Panasonic compressor, M Series, Reciprocating Fixed Speed, 180 W, 1/5 Hp, RSCR, 220 V , r134a

Mbsm.pro, compressor, Tecumseh, SE307-12, 220V, Fla 1.22 A, Lra 7.0 A, R12, 1/5 hp, 687 btu

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022

LT-R10	LT-R12	115/60/1	GT-LOAL	N/A
L209	LT-R12	208-230/60/1	1121	N/A
L25	LT-R12	115/60/1	1250	AEA1413AXA
L33	LT-R12	115/60/1	1570	AEA2415AAB
ML064	LT-R12	115/60/1	640	AEA1360AXA
ML080	LT-R12	115/60/1	800	AEA1380AXA
ML090	LT-R12	115/60/1	900	AEA1410AXA
ML38	LT-R12	115/60/1	380	AEA1336AXA
ML52	LT-R12	115/60/1	520	AEA1360AXA
SE305-1	LT-R12	115/60/1	592	AEA1360AXA
SE306-1	LT-R12	115/60/1	656	AEA1360AXA
SE306-12	LT-R12	208-230/60/1	638	N/A
SE307-1	LT-R12	115/60/1	790	AEA1380AXA
SE307-12	LT-R12	208-230/60/1	687	N/A
SE308-1	LT-R12	115/60/1	899	AEA1410AXA
SE309-1	LT-R12	115/60/1	950	AEA1410AXA
SE312-1	LT-R12	115/60/1	1210	AEA2413AXA
SE407-1	LT-R12	115/60/1	790	AEA1380AXA
SE407-12	LT-R12	208-230/60/1	687	N/A
SE408-1	LT-R12	115/60/1	899	AEA1410AXA
SE409-1	LT-R12	115/60/1	950	AEA1410AXA
SE409-12	LT-R12	208-230/60/1	896	N/A



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, compressor, Tecumseh, SE307-12, 220V, Fla 1.22 A, Lra 7.0 A, R12, 1/5 hp, 687 btu

Mbsm.pro, Compressor Necchi, Esm5, 1/5 Hp, R12, Replaced by , COMPRESSOR, DANFOSS, TL 5G, 1/6++ (1/5 hp) HP, MBP / HBP -R134a, 220-240V/1/50/60Hz, displacement 5.08 cm<sup>3</sup>, motor type RSCR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor Necchi, Esm5, 1/5 Hp, R12, Replaced by , COMPRESSOR, DANFOSS, TL 5G, 1/6++ (1/5 hp) HP, MBP / HBP -R134a, 220-240V/1/50/60Hz, displacement 5.08 cm<sup>3</sup>, motor type RSCR

---

Mbsm.pro, Refrigerator, Compressor,  
Samsung, 1/4 Hp, r134a, 150g,  
MK172HL1UA, MK172H-L1UA,  
MK172HL1UA/TSE, 200/220V-50HZ/ 135W,  
200/220V-60HZ/159W, RSCR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022



Private Picture Copyright: WWW.MBSM.PRO

[https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm\\_dot\\_pro\\_private\\_PDF\\_compressor-catalogue-2015-1.pdf](https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm_dot_pro_private_PDF_compressor-catalogue-2015-1.pdf)

## SPECIFICATION

REFRIGERATOR MODEL NO :	RT41MASW
DIMENSION(WxDxH) :	670mm x 650mm x 1685mm
GROSS CAPACITY :	410 l
RATED VOLTAGE :	220V
RATED FREQUENCY :	60Hz
RATED INPUT :	136W
RATED CURRENT :	0.86A
DEFROSTING INPUT(W/A) :	274W/1.24A
CLIMATIC CLASS OF THE APPLIANCE :	T
RATED MAXIMUM INPUT OF LAMP :	30 W
NAME OF REFRIGERANT :	R-134a
MASS OF REFRIGERANT :	150 g
NET WEIGHT :	67 Kg
NAME OF INSULATION BLOWING GAS :	CYCLOPENTANE
MADE IN THAILAND	

DA68-01618A



Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

			220-60	118	137	468	114	1.04	1.20	4.11	
AC 200-220V~50Hz, 220V~60Hz	NC1A43HLB	RSCR	220-50	102	119	405	91	1.12	1.30	4.45	ST
			220-60	118	137	468	100	1.18	1.37	4.68	
	SD152H-S1UB	RSCR	220-50	120	140	476	113	1.06	1.23	4.21	ST
			220-60	146	170	580	122	1.20	1.39	4.75	
	SD162H-L1UB	RSCR	220-50	146	170	580	139	1.05	1.22	4.17	ST
			220-60	182	212	723	152	1.20	1.39	4.75	
	SK170H-L1UB	RSCR	220-50	168	195	667	153	1.10	1.28	4.36	ST
			220-60	206	240	818	164	1.26	1.46	4.99	
	MSA170H-L1B	RSCR	220-50	173	201	687	141	1.23	1.43	4.87	ST
			220-60	220	256	873	163	1.35	1.57	5.36	
	MK172H-L1U	RSCR	220-50	176	205	699	131	1.34	1.56	5.33	ST/OC
			220-60	224	260	889	159	1.41	1.64	5.59	
	MK172H-L1UA	RSCR	220-50	176	205	699	135	1.30	1.52	5.18	ST/OC
			220-60	224	260	889	159	1.41	1.64	5.59	
	SK182H-L2UA	RSCR	220-50	203	236	806	182	1.12	1.30	4.43	FC/OC
			220-60	239	278	949	191	1.25	1.46	4.97	

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

---

Compressor, NL7.3FT, SECOP, 105G6726,

DANFOSS, 6726, 105G, 105 G 6726, 105G  
6726, 1/5 HP, 180W, LBP, Zanussi,  
Kiriazi Electric Company, TGV 335L,  
NO FROST, TSV 320L, FC 83L , R134A,  
125G, 220-240V 50Hz, CSIR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022

# KIRIAZI



ELECTRIC  
COMPANY



Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



● ○ REDMI NOTE 8  
○ ∞ AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

<b>Type de gaz</b>	<b>App</b>	<b>HP</b>	<b>Watt</b>	<b>Modèle</b>	<b>TL</b>
<b>R134A</b>	<b>LBP</b>	<b>1/6</b>	<b>134</b>	<b>TLY5.1FK</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/4</b>	<b>183</b>	<b>TLES7FT.4</b>	


R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4 /	213	NLY7F	
		(1)			
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / 1/3 HBP	264	SC12G	
R134A	LBP / MBP / 1/2 HBP	392	SC18G	
R134A	LBP / MBP / 3/4 HBP	456	SC21G	SC
R134A	MBP 3/4	1073	SC21MFX	
R134A	LBP 3/4	567	SC21FTX	
R404A	LBP 1	1033	ST21CL	
R404A	LBP 1	986	SC18CLX.2	
R404A	MBP 1/2	359/650	SC15MLX	
R404A	MBP 7/8	762/1584	SC18MLX	

# KIRIAZI



# CE



ELECTRIC  
COMPANY

®


Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



REDMI NOTE 8  
AI QUAD CAMERA



REDMI NOTE 8  
AI QUAD CAMERA

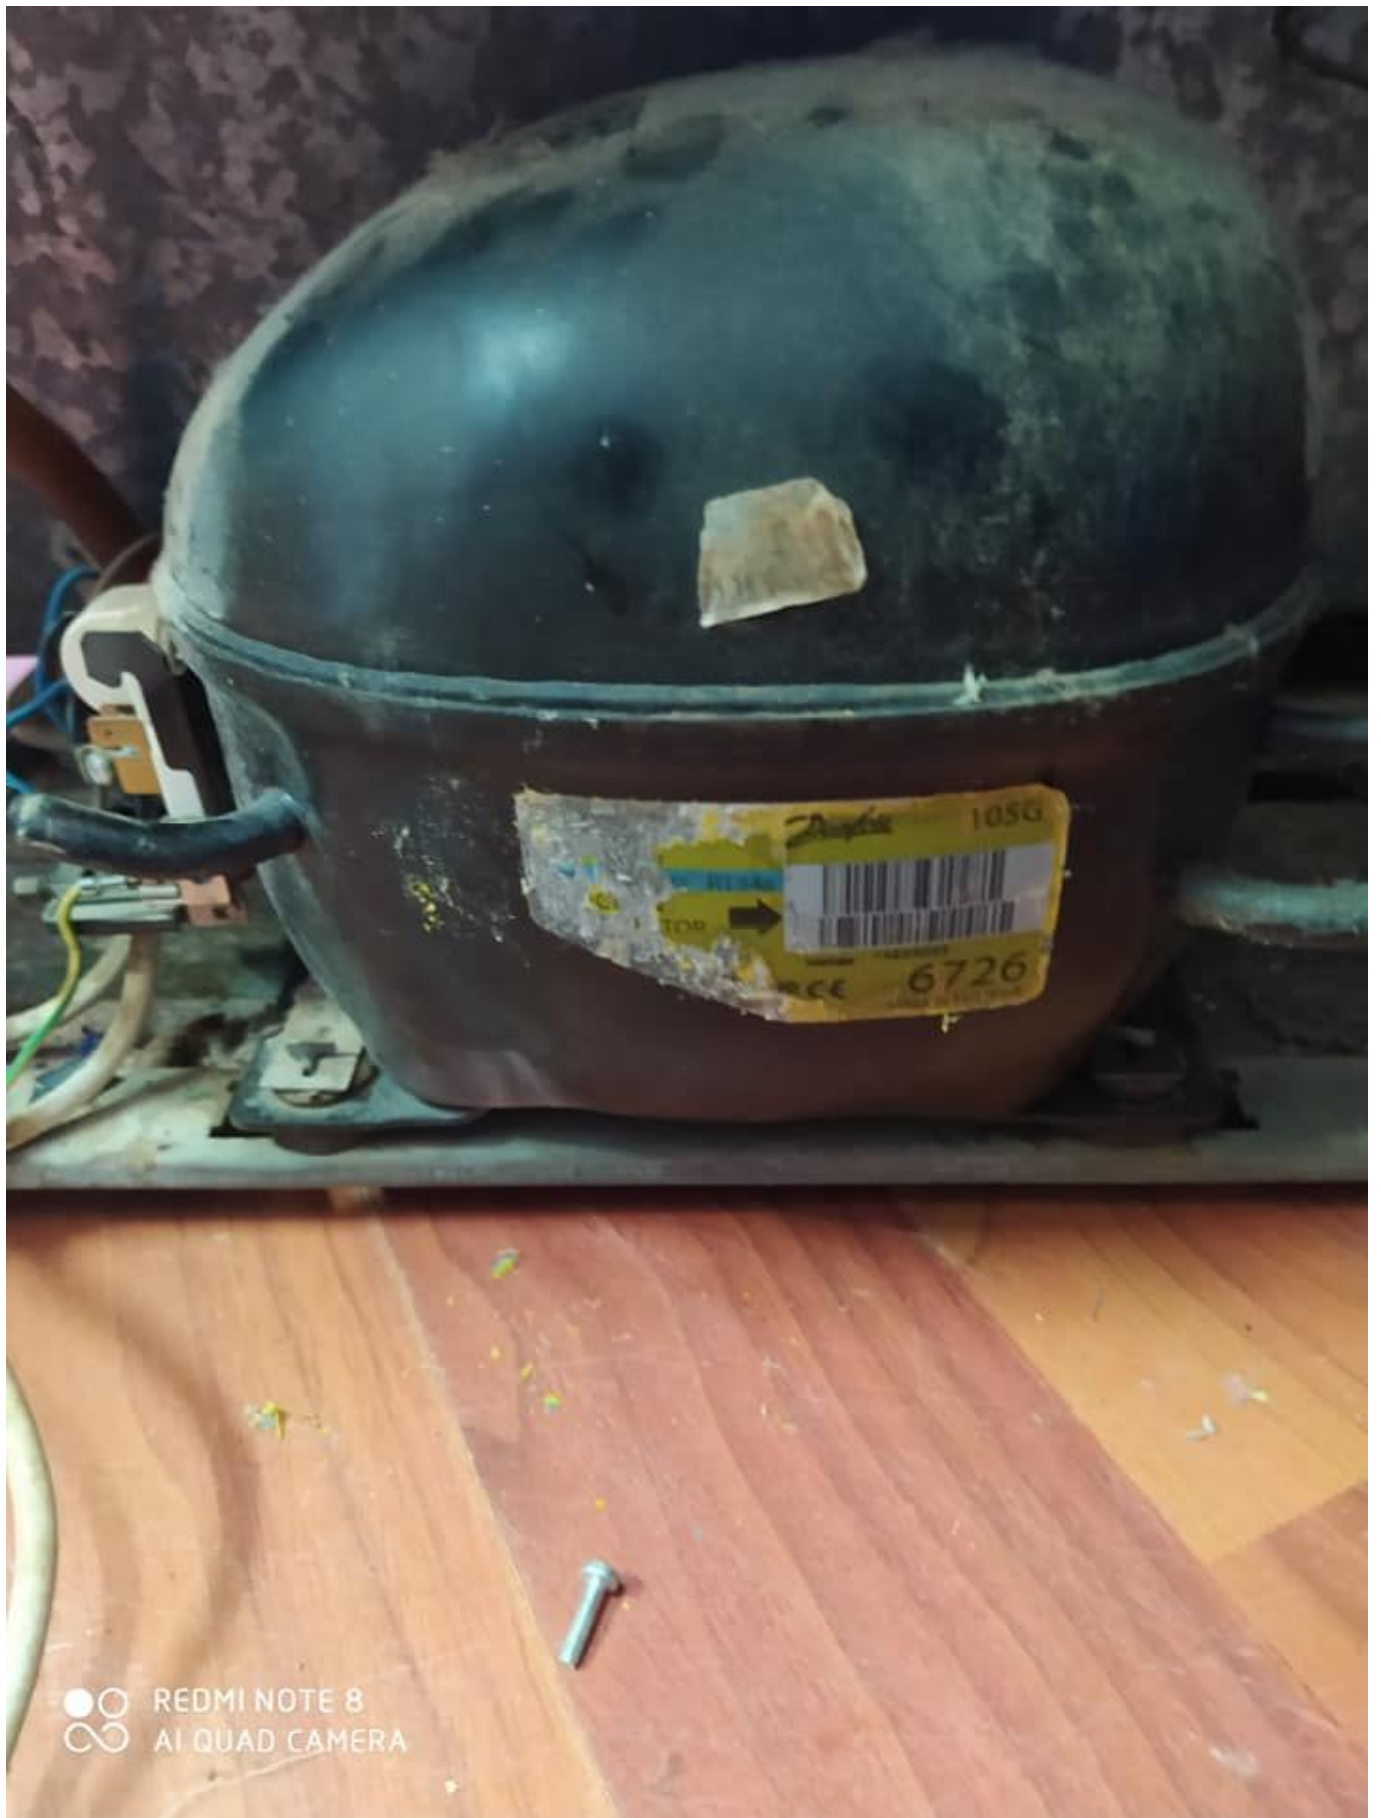

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_NL7.3FTTélécharger

Mbsm\_dot\_pro\_private\_PDF\_nl73ft\_105g6731\_r134a\_220v\_50hz\_11-2011\_desd406c102Télécharger

Refrig	Applic	oil cooling	Evaporating temperature [°C]											Evaporating tem					
			-35	-30	-25	-20	-15	-10	-5	0	5	10	15	-25	-10				
R134a	LBP		1/20	14	26	40	56	74	95								60	86	
		PL50F	101G0220	1/20	14	26	40	56	74	95								60	86
		TL53FT	102G4324	1/16	21	34	50	69	92	120								62	93
		TL54FT	102G4424	1/10	27	43	63	88	117	152								88	123
		TL55FT	102G4524	1/8+	48	71	98	131	170	216								114	165
		TL55.7FT.3	102G4615	1/6	66	90	120	156	200	253								120	170
		TL56.5FT.3	102G4703	1/5			136												139
		NL6FT	105G6628	1/6	60	84	115	152	198	253								123	184
		NL6.1FT	105G6620	1/6	60	84	115	152	198	253								123	184
		NL7FT	105G6728	105G6738	1/5	71	100	136	181	235	299							145	220
		NL7.3FT	105G6726		1/5	71	100	136	181	235	299							145	220
		NL8.4FT	105G6865		1/4	87	120	162	213	275	350							169	252
		NL9FT	105G6828	105G6838	1/4	87	120	162	213	275	350							169	252
		NL10FT	105G6829	105G6839	1/3	113	158	213	281	361	455							215	316
		NLE7.3FT	105G6710		1/4	92	118	154	201	258	325							148	221
		SC12FT	104G8205	104G8215	1/3	103	163	233	314	408	517	645						265	380
		SC15FT	104G8505		1/2	126	197	280	376	489	620	772						311	451
		SC18FTX	104G8805		5/8	144	229	325	437	567	719	896						365	517
		SC21FTX 50Hz	104G8105		3/4	192	296	415	553	713	901	1119						428	613
		SC21FTX 60Hz	104G8106		3/4	240	345	470	620	800	1012	1262						475	707
		TL2.5G	102G4251		1/12	11	23	36	51	69	90	116	145	179	219	264		60	84
		TL3G	102G4350		1/12	25	41	59	81	106	136	170	211	258	312		66	96	
		TL4G	102G4452		1/8	41	58	80	107	140	180	226	280	342	413		83	118	
		TL5G	102G4550		1/6	56	79	107	139	178	224	278	341	414	497		100	149	
	FR6G	103G6660		1/5	48	83	124	171	226	290	365	452	552			109	172		
	FR7.5G	103G6680	103G6690	1/5	62	99	142	193	254	325	408	505	618			126	194		
	FR8.5G	103G6780	103G6790	1/4	85	123	171	228	298	381	478	592	722			151	231		
	FR10G	103G6880	103G6890	1/4	92	136	188	250	324	412	516	638	779			179	265		
	FR11G	103G6980		1/3	115	170	233	307	395	501	628	780				202	317		
	TL6.5MF	102G4781		1/4			174	219	279	349	425	520						202	
	NL6.1MF	105G6660		1/5			141	189	245	312	390	482	588	709				187	
	NL7.3MF	105G6772		1/4			179	236	304	385	480	591	719	867				227	
	NL8.4MF	105G6879		1/4+			213	277	353	445	553	679	825	994				261	
	NL10MF	105G6885		1/3			266	346	441	554	687	843	1023	1231				323	
	NLE10MF	105G6888		1/3	88	137	194	262	343	440	554	688	845				198	308	
	NL11MF	105G6151		3/8			292	380	485	609	756	927	1125	1354				360	
	SC10G	104G8000		5/16	23	60	113	183	268	369	486	618	764	925	1100		181	290	
	SC12G	104G8240	104G8250	3/8	65	113	175	252	348	464	603	768	960	1182	1437		227	355	
	SC15G	104G8520	104G8530	1/2			164	290	424	568	728	908	1110	1340	1600		233	440	
SC18G	104G8820	104G8830	1/2+			283	394	526	684	870	1087	1337	1624	1950		331	507		

model	watt	HP	LBP/MBP	نوع گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	هیگرتن SC21G
SC21FTX	567	3/4	LBP	134	هیگرتن SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سفن NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	هیگرتن SC12G (پارنه و سفن)
NL11MF	621	1/3	MBP	134	هیگرتن SC12G (پارنه و سفن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سفن NL7 - High efficiency (7% راندمان)
NLY7F	213		LBP	134	سفن NL9 - High efficiency (7% راندمان)
NLY9FK	237		LBP	134	High efficiency (7% راندمان)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -33.3°C ASHRAE) زیر صفر  
(MBP @ -6.7°C ASHRAE) بالای صفر

FR6B, Compressor, 103U2654, FR6B  
103U2654, DANFOSS TL, FR and SC  
Hermetic Compressors, DANFOSS,  
Kiriazi, 343L, 1/5 Hp, MBP, R12,  
280g, équivalence, 1/4Hp, R134A, 190g

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 February 2022



Private Picture Copyright : WWW.MBSM.PRO

## Compresseurs hermétiques DANFOSS TL, FR et SC

BOC partie No.	Code Danfoss	Puissance nominale et applic	Refrig.	Capacité nominale (watts)	Réf. BOC	Code Danfoss	Puissance nominale et applic	Réfrigérer	Capacité nominale (watts)
FR6B	103U2654	1/5 MBP	R12	354	TL3F	102G4300	1/10 LBP	R134a	58
FR8.5B	103U2854	1/4 MBP	R12	450	TL4F	102G4400	1/8 LBP	R134a	84
SC10B *	104L2510	1/3 MBP	R12	588	TL55F	102G4520	1/6 LBP	R134a	127
FR11B	103U2154	1/3 MBP	R12	624	TL57F	102G4720	1/5 LBP	R134a	162
SC12B *	104L2670	4/9 MBP	R12	756	NL7F	105G6706	1/4 LBP	R134a	183
SC15B *	104L2830	1/2 MBP (LBP)	R12 (R502)	912 (768)	NL9F **	105G6802	1/4 LBP	R134a	214
SC18B *	1042110	2/3 MBP (LBP)	R12 (R502)	1044 (900)	NL11F **	105G6910	1/4 LBP	R134a	274
SC21B	104L2310	3/4 MBP	R12	1212	SC15F **	104G8500	1/3 LBP	R134a	319
SC10B	104L2510	1/3 LBP	R502	468	SC18F **	104G8800	4/9 LBP	R134a	395
SC12B	104L2670	4/9 LBP	R502	612	TL3G	104G4350	1/8 MBP	R134a	175
SC15C	104L2832	2/3 LBP	R502	768	TL4G	102G4452	1/6 MBP	R134a	215
SC18C	104L2111	3/4 LBP	R502	900	FR6G	103G6660	1/5 MBP	R134a	351
SC10G	104G8000	1/3 MBP	R134a	591	FR8.5G	103G6780	1/4 MBP	R134a	468
SC12G	104G8240	4/9 MBP	R134a	751	FR11G	103G6980	1/3 MBP	R134a	609
SC18G	104G8820	2/3 MBP	R134a	1059	SC15G	104G8520	1/2 MBP	R134a	892
SC21G	104G8140	3/4 MBP	R134a	1256	SC10CL	104L2523	1/3 MBP	R507	450
SC12CL	104L2623	4/9 LBP	R507	624	SC15CL	104L2853	2/3 LBP	R507	758
SC18CL	104L2123	3/4 LBP	R507	893					

Remarque:

1. Les compresseurs marqués \*\* sont équipés de raccords de refroidisseur d'huile.
2. Les compresseurs marqués \* peuvent être utilisés sur les systèmes R502 avec fonctionnement à tube capillaire dans la gamme LBP.
3. (Systèmes sans dégivrage automatique uniquement).

Capacités nominales basées sur:

LBP = -23,3 ° C température d'évaporation

MBP = -5 ° C température d'évaporation

Relais de remplacement (appareil de démarrage)	
Réf . BOC	Convient au modèle de compresseur
103N0011	TL3A à TL5A, FR7.5A à FR11A
103N0002	SC12A, SC15A





Private Picture Copyright : WWW.MBSM.PRO

FR6B	103 U26 54	1/ 5 M BP	R 1 2	3 5 4	T L 3 F	1 0 2 G 4 3 0 0	1 / 1 0 L B P	R 1 3 4 a	5 8
------	------------------	--------------------	-------------	-------------	------------------	--------------------------------------	---------------------------------	-----------------------	--------



Private Picture Copyright : WWW.MBSM.PRO