

Austria ,RECIPROCATING ,COMPRESSOR
,SECOP ,HXD30AA ,0.04 1/25 HP ,R600a
, 220v 50Hz

Category: Technologie,Tester ok
written by www.mbsm.pro | 26 April 2020



Picture5 Mbsm Dot Pro : www.mbsm.pro

Austria ,RECIPROCATING ,COMPRESSOR ,SECCOP ,0.04 HP ,HXD30AA , 1/25 HP ,R600a ,
220v 50Hz

QD110H , Chest Freezer Compressor ,1/3HP ,220V/50Hz ,R134A

Category: Technologie,Tester ok

written by www.mbsm.pro | 26 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

1/3HP Refrigeration Compressor 220V/50Hz R134A

AC Compressor: R134A Hermetic LBP Piston Reciprocating Compressor
Model: WQ110H
Power Supply: 220-240/50-60V/Hz
Displacement: 11CC
Nominal Power: 1/3HP
Rated Power: 233W
Cooling Capacity: 280W
COP: 1.20W/W
Motor Type: RSIR
Starting relay: Starting Relay/PTC
Starting Capacitor: / μ F
Running Capacitor: / μ F
Cooling Type: F
Application: LBP
Certificate: 3C
1X20'FCL: 1600PCS



MAL QD110H_{HM}



220-240V~50Hz 1PH

L/MBP HST R134a

No.20010003548 COOLING CAPACITY:420W



www.comptek.com.cn



A003602

الإسكندرية لعلع عمارة التبريد

Application:

LBP: Low back pressure; Refrigerator, Freezer, Wine cooler

MBP: Medium Back Pressure; Air-conditioner, vending machine

HBP: High Back Pressure: Air-conditioner, ice maker

LBP ASHRAE Test Condition:

Evaporation Temperature: -23.3 °C

Condensing Temperature: 54.4 °C

Subcooling Temperature: 32.2 °C

Ambient Temperature: 32.2 °C

MBP ASHRAE Test condition:

Evaporation Temperature: -5 °C

Condensing Temperature: 54.4 °C

Ambient Temperature: 35 °C

Subcooling Temperature: 46.1

Suction Temperature: 35 °C

HBP ASHRAE Test condition:

Evaporation Temperature: 7.2°C

Condensing Temperature: 54.4°C

Ambient Temperature: 35°C

Subcooling Temperature: 46.1°C

Suction Temperature: 35°C

Parameter Variation Range:

Cooling Capacity: ≥ 95%

Input Power: ≤ 115%

Current: ≤ 110%

COP: ≥ 95%

Cooling Type:

S: Natural cooling

F1: Fan cooling, 200mm fan diameter, 1.5m/s air speed

F2: Fan cooling, 200mm fan diameter, 3m/s air speed

**www.mbsm.pro , Original New, ASD53K,
Original New 1/6HP, R134a, LBP,
Wanbao, Refrigerator, compressor,
China, R134A, 220V/50Hz, 1PH, 144W,
Huaguang, Refrigerator Reciprocating**

Category: Solutions,Technologie,Tester ok

written by Jamila | 26 April 2020



Picture5 Mbsm Dot Pro : www.mbsm.pro

www.mbsm.pro , Original New, ASD53K, Original New 1/6HP, R134a, LBP, Wanbao, Refrigerator, compressor,China, R134A, 220V/50Hz, 1PH, 144W, Huaguang, Refrigerator Reciprocating

www.mbsm.pro , ASD65 , R134A
,220V/50Hz ,1/5HP 173W ,Huaguang
,Refrigerator, Compressor ,LBP

Category: Solutions,Tester ok
written by www.mbsm.pro | 26 April 2020



PictureS Mbsm Dot Pro : www.mbsm.pro

www.mbsm.pro , ASD65 , R134A , 220V/50Hz , 1/5HP 173W , Huaguang , Refrigerator , Compressor , LBP

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions, Tester ok
written by www.mbsm.pro | 26 April 2020



Picture5 Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp,
displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a
3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP

- ASPERA

SKU: 3070180

Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO




embraco **NT**



R134a

HBP

EM/NE/NT/NJ

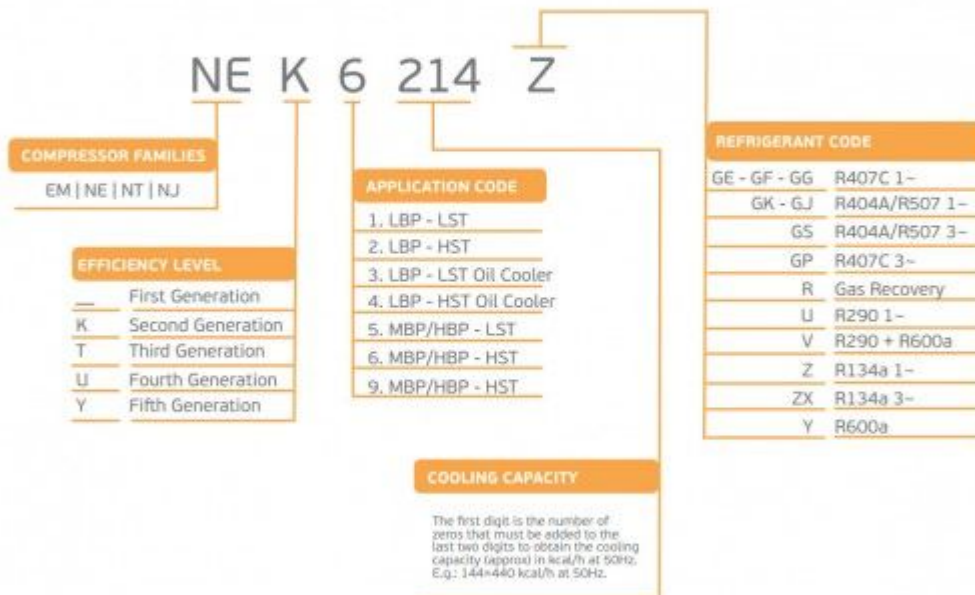

R134a								
50Hz 50-60Hz	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Qb73c15gax5 ,R134a ,
Refrigeration Compressor ,1/4 Hp,
Panasonic compressor catalogue, QB
series , 1Ph , 220V 50Hz

Category: Solutions,Tester ok
written by Jamila | 26 April 2020




PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Qb73c15gax5 ,R134a , Refrigeration Compressor ,1/4 Hp, Panasonic

compressor catalogue, QB series , 1Ph , 220V 50Hz

Rated voltage / Frequency	Model	ASHRAE								Voltage range
		50Hz				60Hz				
		Capacity		COP - W/W		Capacity		COP - W/W		
		W	kcal/hr	RSIR	RSCR	W	kcal/hr	RSIR	RSCR	
220V 50Hz/60Hz	QB51C99GAX0	128	110	1.14	-	157	135	1.17	-	170V-250V 50Hz 187V-242V 60Hz
	QB57C11GAX0	146	126	1.18	-	175	151	1.22	-	
	QB66C16GAX0	165	142	1.20	-	200	172	1.27	-	
	QB77C18GAX0	202	174	1.21	-	224	193	1.27	-	
	QB91C24GAX0	236	203	1.19	-	255	219	1.22	-	
220V 50Hz	QB66C13GAX5	165	142	1.19	-					170V-250V
	QB73C15GAX5	185	159	1.19	-					
	QB77C16GAX5	202	174	1.22	-					
	QB91C19GAX5	236	203	1.25	-					



Rated voltage / Frequency	Model	ASHRAE								Voltage range
		50Hz				60Hz				
		Capacity		COP - W/W		Capacity		COP - W/W		
		W	kcal/hr	CSIR	RSCR	W	kcal/hr	CSIR	RSCR	
220V 50z/60Hz	QB110C25CAX0	273	235	1.18	-	279	240	1.19	-	170V-250V 50Hz 198V-242V 60Hz

PictureS Mbsm Dot Pro : www.mbsm.pro




PictureS Mbsm Dot Pro : www.mbsm.pro

Performance DATA

Application & Refrigerant LBP R134a

Voltage	Model	Displacement cm ³	*2) Capacity (W)					*3) C.O.P.		*4) Motor type	Compressor cooling *5)			Net weight kg		Oil charge cm ³	
			Evaporating temperature					NO	YES		ST	OC	FC	ST/FC	OC	ST/FC	OC
			-30°C	-25°C	-23.3°C	-20°C	-15°C										
*6) 100V 50/60Hz	QB57C88RA00	5.65	118	161	178	213	271	1.27	1.33	RSIR/RSCR	O	-	O	9.1	-	250	-
	QB66C12CA00	6.55	119	164	185	219	293	1.19	-	CSIR	-	-	O	8.8	-	250	-
	QB66C13RA00	6.55	133	182	200	239	304	1.28	1.37	RSIR/RSCR	O	-	O	9.4	-	280	-
	QB86C18TA00	8.56	170	226	248	295	376	-	1.35	CSCR	-	-	O	9.9	-	280	-
	QB91C18CA00	9.07	163	226	251	303	394	-	1.21	CSIR	-	-	O	9.6	-	250	-
220V 50Hz	QB66C13GAX5	6.55	108	149	165	200	263	1.23	-	RSIR	O	-	-	9.2	-	250	-
	QB73C15GAX5	7.27	121	167	185	224	294	1.23	-	RSIR	O	O	-	9.7	9.9	250	300
	QB77C16GAX5	7.69	131	182	202	245	319	1.26	-	RSIR	O	O	-	9.8	10.0	250	300
	QB86C18GAX5	8.56	145	200	222	268	347	1.26	-	RSIR	O	O	O	9.9	10.1	250	300
	QB91C19GAX5	9.07	154	213	236	285	372	1.29	-	RSIR	O	O	O	10.2	10.5	250	300
	QB110C25GAX5	10.86	176	246	273	331	432	1.18	-	RSIR	-	O	O	10.4	10.6	250	300
*4) 220-240V 50Hz	QB51C74GAW5	5.10	84	116	128	153	196	1.21	-	RSIR	O	-	-	8.7	-	250	-
	QB57C87GAW5	5.65	97	132	146	175	225	1.23	-	RSIR	O	-	-	8.8	-	250	-
	QB66C97GAW5	6.55	108	149	165	200	263	1.25	-	RSIR	O	O	-	9.2	-	250	-
	QB73C12GAW5	7.27	121	167	185	224	294	1.26	-	RSIR	O	O	-	9.7	-	250	-
	QB77C13GAW5	7.69	131	182	202	245	319	1.27	-	RSIR	O	O	-	9.8	-	250	-
	QB86C13GAW5	8.56	145	200	222	268	347	1.27	-	RSIR	O	O	-	9.9	-	250	-
	QB91C16GAW5	9.07	154	213	236	285	372	1.28	-	RSIR	O	O	-	10.0	-	250	-

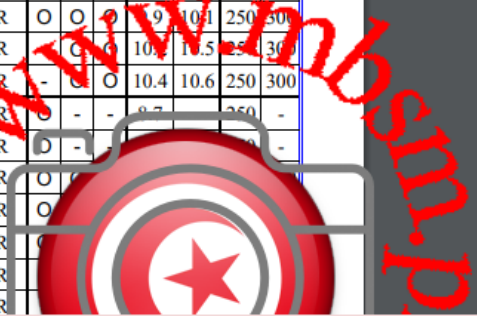



PictureS Mbsm Dot Pro : www.mbsm.pro