

no frost, egl99aa zmc refrigerator,  
DF40, silver, ideal, zanussi, IDEAL  
ZANUSSI, EGL99AA ZMC, DF 40 Elgance,  
Compressor, ACC Cubigel, Huayi,  
Electrolux, ZEM GL99AA, GL99AA, LBP ,  
R134a, 220-240V/1/50Hz, 1/4 HP,  
discharge 9.93 cm3, motor type RSIR,  
LRA 14.4A

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 9 April 2021



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger](#)  
[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GL99AATélécharger](#)

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a,  
220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A,  
expansion device: capillary, cooling: static, weight 11 kg , the statutory  
warranty period shall apply (24 months), Delivery time Info: with “immediately  
available” and “scarce stock”, usually delivery within 2 days. For “currently  
not available” delivery time usually 2 weeks or delivery time in urgent cases  
contact us.

---

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm

Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5

**ZMC** C **GL99AA** 0326  
220-240V~50Hz  
R 134a  
MADE IN EGYPT  
CE  
482  
50-3975 6

**COMPRESSOR**

Displacement (cm <sup>3</sup> )	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm <sup>3</sup> )	295

**MOTOR**

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

**ELECTRICAL COMPONENTS**

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14,00		
Protector	MRP336JZ	T0377	AE11FU

**APPLICATION**

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

**NOMINAL PERFORMANCE**

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

**TEST CONDITIONS**

	CYCLE A	CYCLE B
Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz



موديل : KGT1

الشركة العالمية لصناعة الأجهزة المنزلية - الاسكندرية

١,٢ امبير

١٩٥ وات

٥٠ هيرتز

٢٢٠ فولت ~

السعة : ١,٣ اقدم

درجة الحماية : IPX2

التصنيف : ST

الشحنة : ١٧٠ جم ف ١٣٤ ا

سنة الانتاج

No.

٢٠٠٥/٣٢٠

صنع في مصر

200

3 2

٢٠٠٥/٣٢٠

Made in Egypt



Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9 PRO  
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9 PRO  
AI QUAD CAMERA


Private Picture Copyright : WWW.MBSM.PRO



Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

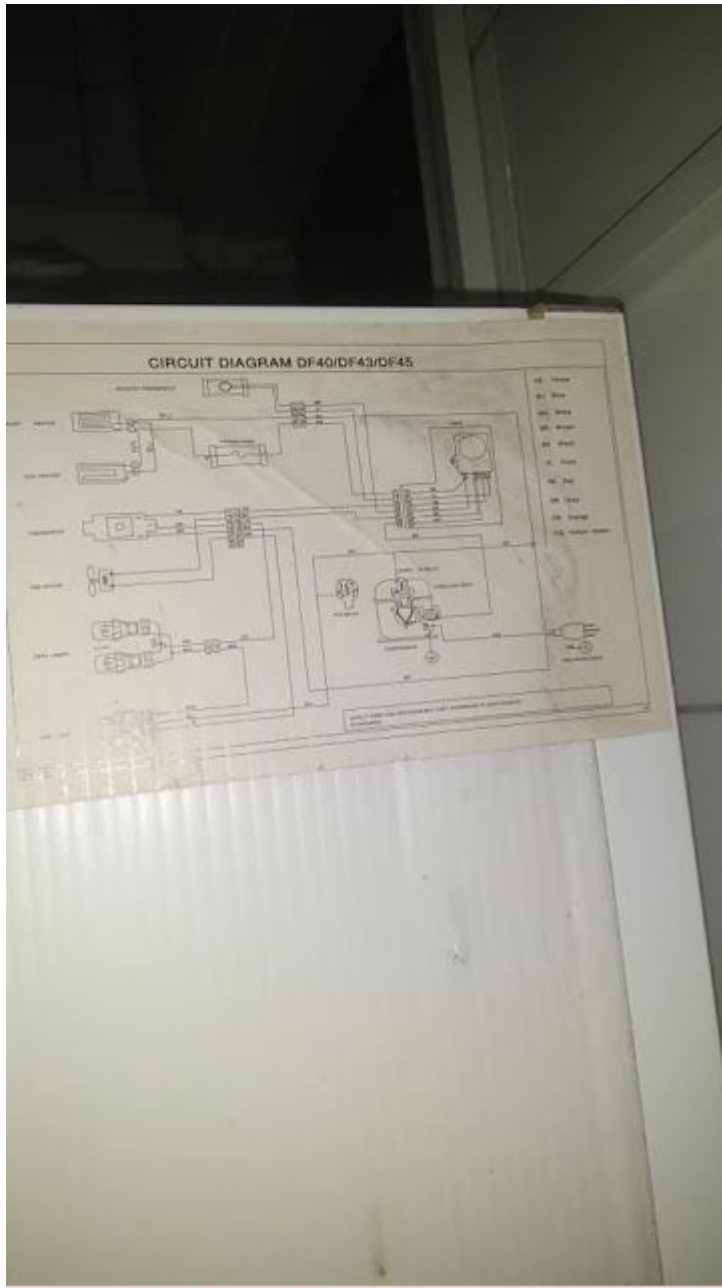

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**ZMC**

**EGL99AA 1002**

220-240V~50Hz

**R 134 a**

MADE IN EGYPT



3

480

0250659



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Compresseur, MPT18LA, R-404A / R-507, Cubigel Compressors, 1/2 HP, LBP, CSR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 9 April 2021



**cubigel**  
compressors  
**MPT18LA**  
 220-240V-50Hz PH1  
**R404A**  
**R507** THERMALLY PROTECTED  
 CE  
 MADE IN SPAIN 2  
 9041257434100130 09121

Le compresseur à piston hermétique à basse température Cubigel MPT18LA est utilisé dans les équipements de réfrigération avec des températures de fonctionnement d'évaporation inférieures à -20 °C:

1. Réfrigérateurs
2. Congélateurs
3. Réfrigérées vitrines
4. Chambres frigorifiques pour produits surgelés.

## Caractéristiques du compresseur Cubigel MPT18LA:

- Travailler sur le fréon R404a / R507a
- Application de LBP (Low Dack Pressure)
- Volume du cylindre 18 cm<sup>3</sup>
- Capacité d'huile 450 cm<sup>3</sup>
- Type d'huile ISO VG 32 ESTER
- Courant de démarrage 19 A
- Poids 12,5 kg

## Caractéristiques du moteur du compresseur Cubigel MPT18LA:

- Type de moteur CSR
- Puissance 1/2 CV
- Tension 200-220V 50Hz
- Tension admissible 170-242 V



## HUAYI, Refrigeration Compressor ,HYE69Y63, R134A, LBP, 195W, 1/4Hp , RSIR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 9 April 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

HUAYI, Refrigeration Compressor ,HYE69Y63,R134A, LBP, 195W, 1/5Hp , RSIR,

## Compressor ,ACC Cubigel ,Huayi ,Electrolux ,ZEM ,GP16TG, HMBP, R134a, 200- 220V / 220-230V/1/50/60Hz, 3/8 HP, displacement 16,15 cm<sup>3</sup>

Category: Technologie,Tester ok

written by [www.mbsm.pro](http://www.mbsm.pro) | 9 April 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor ,ACC Cubigel ,Huayi ,Electrolux ,ZEM ,GP16TG, HMBP,R134a, 200- 220V / 220-230V/1/50/60Hz, 3/8 HP, displacement 16,15 cm<sup>3</sup>

---

**HUAYI ,COMPRESSOR , HYE55YL63 ,1/6 Hp  
, 129Kcal ,R134a, 220V ,LBP**

Category: Technologie,Tester ok  
written by [www.mbsm.pro](http://www.mbsm.pro) | 9 April 2021



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

HUAYI ,COMPRESSOR , HYE55YL63 ,1/6 Hp , 129Kcal ,R134a, 220V ,LBP